

136 Top

Sizes 44, 46, 48, 50, 52

Length from waist 32 cm (12 3/4 ins)

3/4-sleeves, approx. 13 cm (5 ins) shorter than normal

Materials

Hoop-striped jersey with two-way stretch, width: 140 cm (55 ins)

length: 1.85 – 1.85 – 1.90 – 1.90 – 2.10 m
(2 1/8 – 2 1/8 – 2 1/8 – 2 1/8 – 2 1/4 yds).

A twin sewing machine needle.

Recommended fabrics: Stretch jersey. Use only very elastic jersey fabrics with two-way stretch.

Preparations


Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (view B). This pattern also includes pattern pieces, lines and markings for style view A that should be ignored.


burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:

1.5 cm (5/8 in), hem 4 cm (1 5/8 ins), sleeve hems 4 cm (1 5/8 ins) (flare sleeve hem allowance).

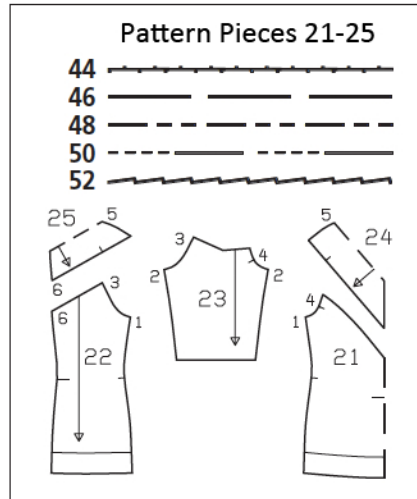


Sizes 44-50

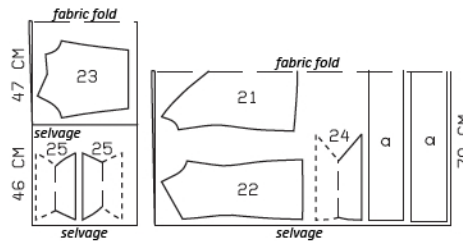

Cut pieces 21-25 & a on a double layer of fabric (or single if size 52). Use fabric with a width of 140 cm

Size 52

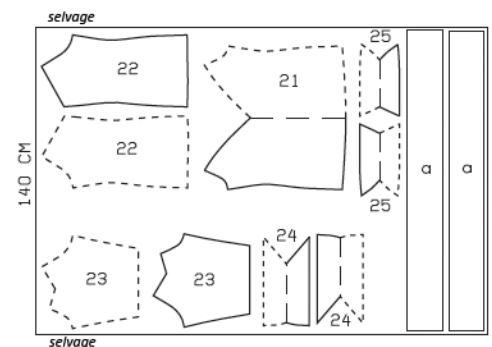

Cutting Out

21 front, on a fold	1x
22 back	2x
23 sleeve	2x
24 front neck band, on a fold	2x
25 back neck band, on a fold	2x

Draft the following piece NOT included in the pattern:

a) 2 bands, 135 cm (53 1/4 ins) long, 16 cm (63/8 ins) wide, cut without allowance.

Sewing

Note: Stitch seams on stretch fabrics with a special stretch stitch or at a narrow zigzag setting. Stitch hems with a twin machine needle to keep them elastic.

Stitch centre back seam, beginning exactly at marked upper seam line, right sides together. Press seam allowances open. Stitch side seams and sleeve seams. Neaten seam allowances together and press onto back. Stitch sleeves to armhole edges. Press seam allowances onto sleeves.

Baste one narrow edge of each band to centre seam edge of front neck band, with wrong side facing right side (outer band half between fold line and joining seam line). Lay front neck bands right sides together. Stitch centre front seam, catching bands. Stitch centre back seam of neck band. Clip seam allowances into each point of neck.

Stitch shoulder seams of neck band, right sides together. Clip seam allowances into each corner. Press seam allowances open. Fold neck band on fabric fold line, wrong side facing in, and press. First, on one half of neck edge, stitch long edges of neck band in place together. Clip seam allowance of front into point of neck. Now stitch neck band to remaining half of neck. Turn band up and press seam allowances away from band.

Turn hem allowances of top and sleeves to inside. Work from the outer side and use the twin needle to stitch each hem, 3 cm (1 1/4 ins) from the edge.

