

113 Blouse

Sizes 36, 38, 40, 42, 44

Back length approx. 63 cm (25 ins)

Materials

Batiste,
width: 140 cm (55 ins)
length: 1.45 – 1.45 – 1.50 – 1.50 – 1.50 m (1 3/4 yds).

Vilene/Pellon G 785.

7 small buttons.

Recommended fabrics: Lightweight blouse fabrics.

Preparations

Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.




Trace the pattern pieces from the pattern sheet following the lines and markings for your size.

The buttonholes on piece 24 are marked for size 36. For sizes 38 – 44, mark the top buttonhole the same distance from upper edge as for size 36. The bottom buttonhole is the same for all sizes. Space the other buttonholes evenly in between.

burda style magazine patterns do not have seam allowance included.

To be added:

Seams and edges 1 cm (3/8 in), hem 2 cm (3/4 in), sleeve hems 2 cm (3/4 in) (flare sleeve hem allowance).

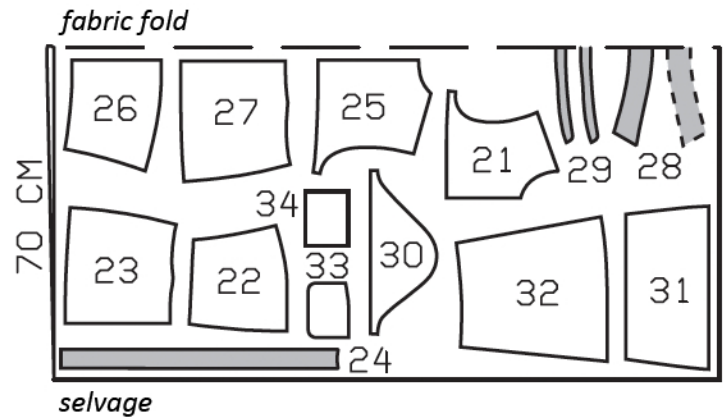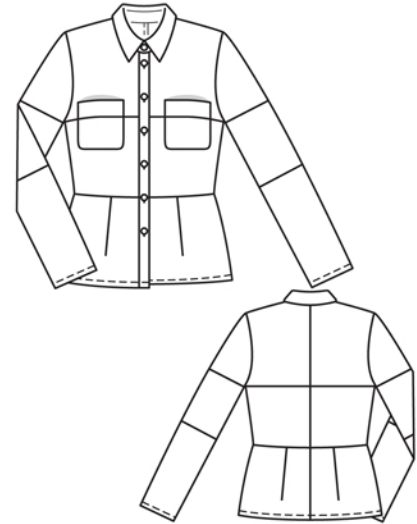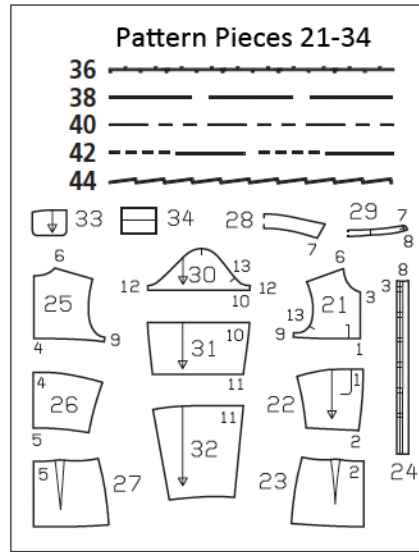

Cut pieces from a double layer of fabric, right side facing in. Use fabric with a width of 140cm.

Cutting Out

21 upper front	2x
22 middle front	2x
23 lower front	2x
24 front band	2x
25 upper back	2x
26 middle back	2x
27 lower back	2x
28 collar, on a fold	2x
29 collar stand, on a fold	2x
30 upper sleeve piece	2x
31 middle sleeve piece	2x
32 lower sleeve piece	2x
33 pocket	2x
34 pocket band	2x

Interfacing: See shaded area on pattern layout. Fuse interfacing to wrong side of fabric.

Sewing

Stitch darts in lower front and back pieces. Press darts toward centre.


Stitch horizontal seams on front and back pieces, right sides together. Press seam allowances up. Stitch centre back seam, side seams, and shoulder seams. Press centre seam allowances to one side. Press side seam and shoulder seam allowances onto back.

Press hem allowance to inside, turn half in, and stitch.

Stitch front bands to vertical edges of front pieces. Press seam allowances of band joining seams and of other long edges of bands onto bands. Fold bands on fold line, right side facing in. Stitch across bottom ends. Turn bands right side out. Baste inside edges in place. Topstitch bands close to joining seams.

Collar with collar stand: Stitch collar pieces right sides together along outer edges. Trim seam allowances. Turn collar right side out and press. Lay collar stand pieces right sides together, catching collar in between. Stitch along front and upper collar stand edges, beginning and ending in front, exactly at seam line on joining edge. Turn collar stand right side out. Stitch outer collar stand piece to neck edge. Press seam allowances onto collar stand. Turn edge of inside collar stand under and baste over joining seam. Topstitch collar stand close to joining seam.

Stitch pocket bands to upper edges of pocket pieces. Press seam allowances onto bands. Fold each band to inside on fold line, turn inside edge under, over joining seam, and baste in place. Topstitch bands close to joining seams. Press allowances on side and lower edges to inside. Edgestitch pockets in place on fronts, at placement lines. Stitch small triangles at top corners of pockets.

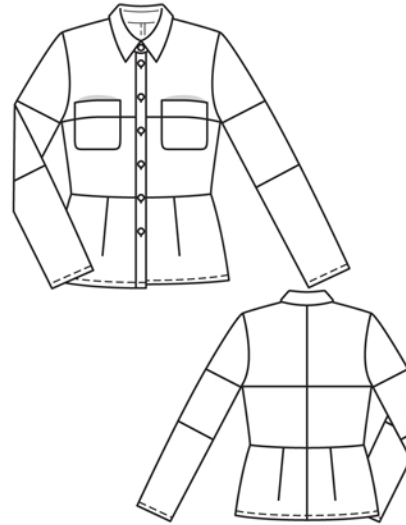

Stitch horizontal seams of sleeves. Press seam allowances up. Stitch sleeve seams. Press sleeve hem allowances to inside, turn in, and stitch.

Set in sleeves. Matching top sleeve with shoulder seam, and underarm points.

Work buttonholes in right front edge and in right end of collar stand.