

110 Blouse

Sizes 36, 38, 40, 42, 44

Back length approx. 65 cm (26 ins)

7/8-sleeves, approx. 48 cm (19 ins) long

Materials

Batiste,

width: 140 cm (55 ins)

length: 1.30 – 1.30 – 1.30 – 1.40 – 1.40 m

(1 1/2 – 1 1/2 – 1 1/2 – 1 5/8 – 1 5/8 yds).

Vilene/Pellon G 785.

8 buttons.



Recommended fabrics: Lightweight blouse fabrics with some body.

Preparations


Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (110). This pattern also includes pattern pieces, lines and markings for style 111 that should be ignored.

The buttonholes marked on piece 23 are for size 36. For sizes 38 – 44, mark the top buttonhole the same distance from upper edge as for size 36. The bottom buttonhole is the same for all sizes. Space the other buttonholes evenly in between.

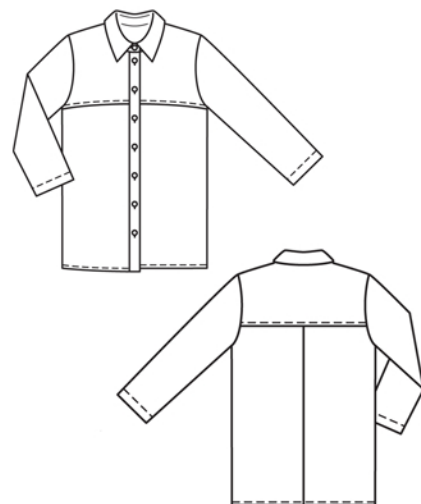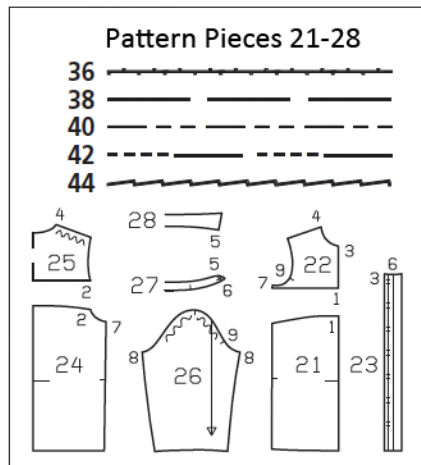

Cut from a double layer of fabric, right side facing in. Use fabric with a width of 140cm

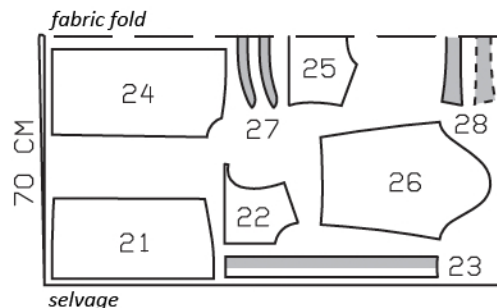

Cutting Out

21 front	2x
22 front yoke	2x
23 front band	2x
24 back	2x
25 back yoke, on a fold	1x
26 sleeve	2x
27 collar stand, on a fold	2x
28 collar, on a fold	2x

Interfacing: See shaded area on pattern layout. Fuse interfacing to wrong side of fabric

burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:

Seams and edges 1.5 cm (5/8 in), hem 2 cm (3/4 in), sleeve hems 5 cm (2 ins) (flare sleeve hem allowance).

Sewing

Stitch centre back seam. Neaten seam allowances together and press to one side.

Stitch yokes to fronts and to back (seam numbers 1 and 2). Press seam allowances onto yokes. Topstitch yokes 7 mm (1/4 in) from joining seams.

Stitch side seams and shoulder seams, right sides together. Neaten seam allowances together and press onto back.

Turn hem allowance to inside, turn half under, press, and stitch.

Stitch front bands to vertical edges of front pieces. Press seam allowances of band joining seams and of other long edges of bands onto bands. Fold bands on fold line, right side facing in. Stitch across bottom ends. Turn bands right side out. Baste inside edges in place. Topstitch bands close to joining seams.

Collar with collar stand: Stitch collar pieces right sides together along outer edges. Trim seam allowances. Turn collar right side out and press. Lay collar stand pieces right sides together, catching collar in between. Stitch along front and upper collar stand edges, beginning and ending in front, exactly at seam line on joining edge. Turn collar stand right side out. Stitch outer collar stand piece to neck edge. Press seam allowances onto collar stand. Turn edge of inside collar stand under and baste over joining seam. Topstitch collar stand close to all edges.

Stitch sleeve seams. Turn sleeve hem allowances to inside, turn half in, and stitch.

Set in sleeves, easing sleeve caps.

Work buttonholes in right front band and right end of collar stand.

