

138 Bermudas

Sizes 34, 36, 38, 40, 42

Side length with waistband 50 cm

Hem circumference 63 cm (25 ins)

Materials

Textured wool fabric, width: 150 cm (59 ins) length: 1.05 m (1 1/4 yds) for all sizes.

Piece of lining fabric, approx. 45 x 30 cm (18 x 12 ins), for the pockets.

Interfacing.

1 zipper, 15 – 15 – 15 – 16 – 16 cm (6 – 6 – 6 – 7 – 7 ins) long.

1 button.



Recommended fabrics: Trousler fabrics of wool or blends.

Preparations


Print the pattern out on letter or A4 sized paper. It is **very** important to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (138). This pattern also includes pattern pieces, lines and markings for style 139 that should be ignored. Trace the pocket piece from piece 21 as a separate pattern piece.

The stitching line at the zip slit is marked for size 34. For sizes 36 – 42, mark the stitching line the same distance from centre front as for size 34, noting length of slit.

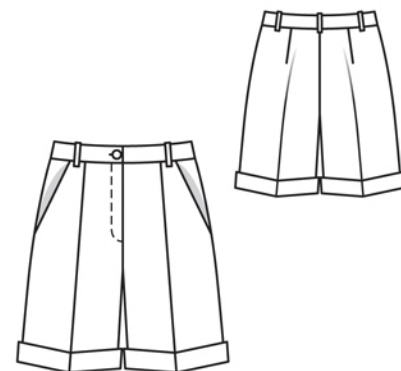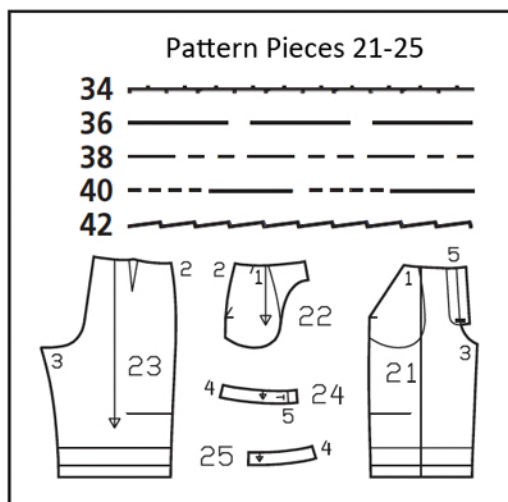

Cut from a double layer of fabric, right side facing in. Use fabric with a width of 150cm.

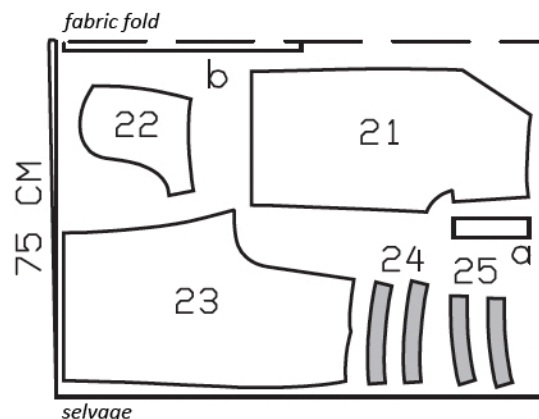

Cutting Out

Wool fabric:
 21 front trouser piece 2x
 22 side hip yoke with integrated pocket piece 2x
 23 back trouser piece 2x
 24 front waistband 4x
 25 back waistband 4x

Draft the following pieces **NOT** included in the pattern:

a) left underlap piece, 16 – 16 – 16 – 17 – 17 cm (6 1/2 – 6 1/2 – 6 1/2 – 6 3/4 – 6 3/4 ins) long, 4 cm (1 1/2 ins) wide, finished width 2 cm (3/4),

b) 5 belt carriers, a total of 50 cm (20 ins) long, 3 cm (1 1/4 ins) wide (incl. allowances).

Lining: pocket piece (piece 21) 2x.

Interfacing: Iron to wrong side of waistband pieces.

burda style magazine patterns do not have seam allowance included.

To be added:
 Seams and edges 1.5 cm (5/8 in).
 Turn-up and hem allowance are already included on the pattern.

Sewing

Press creases in front pieces then topstitch close to fold. Stitch back darts and press toward centre back.

Hip yoke pockets: Stitch pocket pieces right sides together with pocket opening edges of front pieces. Turn pocket pieces up and stitch to seam allowances, close to seams. Turn pocket pieces to inside. Pin pocket opening edges to side hip yokes, at abutting lines. Stitch edges of pocket pieces together. Baste pocket pieces to wrong side of front pieces, first trimming away allowance of right pocket piece along centre front.

Stitch side seams and inside leg seams. Press seam allowances open. Stitch centre front seam from slit mark to inside leg seam.

Zip slit: Press self-facings on slit edges to inside. Stitch along centre front on right end and 5 mm (3/16) before centre front on left end. Stitch zip under left slit edge (underlap), stitching close to zip teeth. Pin slit closed, matching centre fronts. Stitch loose zip tape to right facing, not catching front piece. Baste facing in place. Topstitch slit as marked, from upper edge to 3 cm (1 1/4 ins) above end. Fold underlap piece lengthwise, right side facing in. Stitch across bottom end. Turn right side out. Lay underlap under left slit edge and pin to facing. Stitch facing to underlap, close to zip attachment seam. Lay slit closed again and topstitch to the end, catching underlap.

Stitch centre back seam. Press seam allowances open from upper edge to beginning of crotch curve. Do not press seam allowances flat along curve.

Belt carriers: Neaten long edges of fabric strip for belt carriers and press to wrong side, 8 mm (1/4 in) wide. Topstitch close to fold edges. Cut strip into 5 equal pieces. Baste belt carriers to upper edge of bermudas, in front placing one between each pressed crease and pocket opening and in back, between dart and side seam and over centre back seam.



Waistband: Stitch side seams and centre back seam of waistband units. Stitch outer waistband to upper edge of bermudas, leaving right waistband end extending at centre front. stitch left waistband end to underlap. Press seam allowances of attachment seam onto waistband. Pin inside waistband right sides together with attached outer waistband. Stitch across front waistband ends (at centre front on the right) and along upper waistband edge. Trim seam allowances. Turn waistband right side out. Turn inside waistband edge under and baste in place, approx. 4 cm (1 1/2 ins) long, then lay remaining edge flat over joining seam. Work from right side of bermudas to stitch along attachment seam, catching inside edge. Work buttonhole in right waistband end.

Stitch across belt carriers 2 cm (3/4) below waistband attachment seam. Turn belt carriers up, turn ends under, and stitch to upper waistband edge.

Turn-ups: Fold each trouser leg on turn-up fold line, lay fold up to placement line (right fabric side), and press. Pin fold edge in place. Turn lower edge up and stitch turn-up in place, approx. 2 cm (3/4) below fold edge. Turn lower edge down again. Press hem allowance to inside on fold line and sew in place by hand.

Press back creases but do not topstitch close to folds.