

110C Pants

Sizes 34, 36, 38, 40, 42

Side length 102 cm (40 1/4 ins)

Materials

Wool jersey diagonal,
width: 145 cm (57 ins)
length: 1.10 – 1.10 – 1.10 – 1.25 – 1.25 m
(1 1/4 – 1 1/4 – 1 1/4 – 1 1/2 – 1 1/2 yds).

Petersham ribbon (for waistband),
width: 2 cm (3/4 in)
length: 1.50 – 1.60 – 1.70 – 1.75 – 1.85 m
(1 3/4 – 1 3/4 – 1 7/8 – 2 – 2 1/8 yds).

1 invisible zip, 22 cm (9 ins) long.

1 sew-on snap fastener.

Recommended fabrics: Trousers fabrics with width-wise or two-way stretch. Use only stretch leather or stretch fabrics or jersey.

Preparations



Print the pattern out on letter or A4 sized paper. It is very important to not scale or fit any of the pages, you must print the document in actual size. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (110C). This pattern also includes pattern pieces, lines and markings for style 110A and B that should be ignored.


burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:


Seams and edges 1.5 cm (5/8 in), hem 4 cm (1 5/8 ins). View A: Cut lining pieces with 1.5 cm (5/8 in) seam and hem allowances.

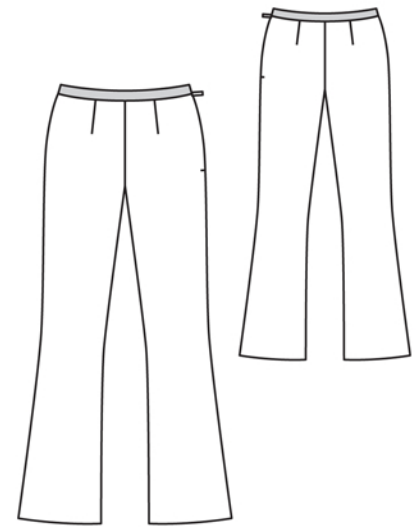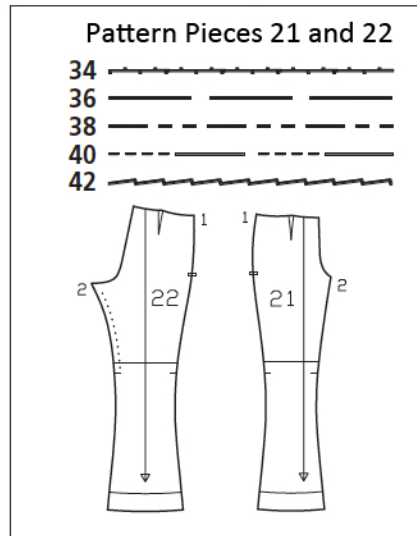

Jersey, 145cm wide
Sizes 34-38

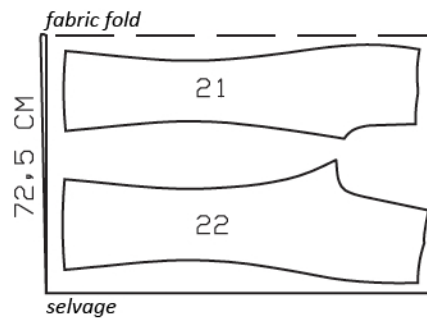

Sizes 40, 42

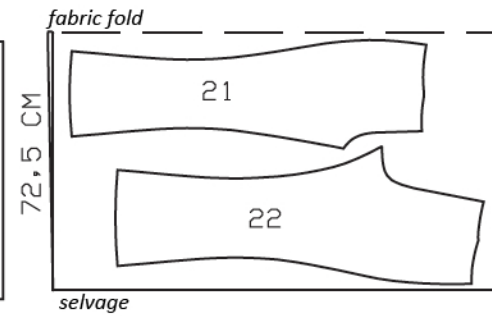

Cut from a double layer of fabric, right side facing in.

Cutting Out

Jersey:

21 front trouser piece 2x

22 back trouser piece 2x

Sewing

Stretch seam edges: Lay back trouser pieces right sides together. Press inside leg edges above seam marks with a steam-iron or under a damp cloth to stretch them to match edges of front trouser pieces.

Stitch darts in front and back trouser pieces. Press darts toward centre.


Sew invisible zip to left trouser pieces, see the "Helpful Hint" on next page. Stitch left side seam below zip. Press seam allowances open.


Stitch right side seam and inside leg seams.

Pull one trouser leg over the other, with right sides facing. Stitch centre front and back seam as continuous seam. Press seam open, from upper edges to beginning of crotch curve. Do not press seam open along curve.

Waistband: Turn one end of petersham ribbon under, approx. 1 cm (3/8 in) wide, and press. Measure and mark 74 – 78 – 82 – 86 – 90 cm (29 1/4 – 30 3/4 – 32 1/2 – 34 – 35 1/2 ins) from this end. Lay petersham ribbon on inside of seam allowance on upper trousers edge so that pressed-under end extends 2 cm (3/4 in) past back slit edge and marking meets front slit edge. Edgestitch lower edge of ribbon in place. Fold ribbon over front slit edge to inside. Pin ribbon edges together, catching seam allowance of trousers in between. Turn in end of petersham ribbon. Edgestitch ribbon edges together. Fasten waistband with the snap.

Press hem allowances to inside and sew in place by hand.

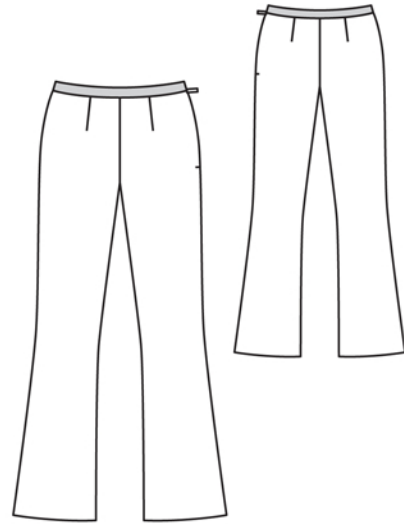

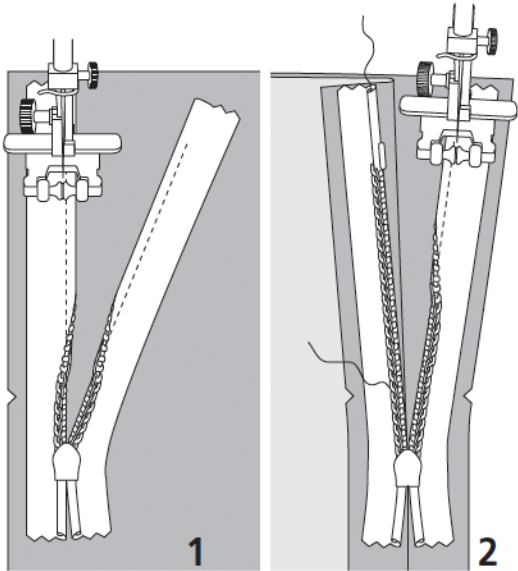

These special zippers come in various lengths. The zipper should be at least 2 cm (3/4 in) longer than the slit. It is sewn in place before the seam below the slit is stitched. A special presser foot is required to sew the zipper in place.

Sewing the zipper in place:

Open the zipper and push the coil back with your thumbnail to reveal the seam marking between the tape and the coil. Place the open zipper right side down on the right fabric side of one slit edge.

In order to stitch the zipper in place exactly along the marked seam line, you must first calculate the distance between the tape edge and the fabric edge as follows: width of seam allowance minus 1 cm (3/8 in) tape width = distance from edge of fabric. This will yield a value of 5 mm (3/16 in) if the width of the seam allowance is 1.5 cm (5/8 in).

Pin the top end of the zipper tape in place, the calculated distance from the edge of the fabric. The bottom end of the zipper will extend past the marked end of the slit. Place the presser foot on the zipper so that the coil is in the notch to the right of the needle (1). Stitch zipper in place, from the top to the marked end of the slit. Close zipper.

Place the other zipper tape face down on the opposite slit edge and pin in place at the top. Open zipper again. Place the presser foot on the top end of the zipper so that the coil is in the notch to the left of the needle (2). Sew the zipper in place, from the top to the end of the slit. Close zipper.

Now stitch the seam below the zipper, from bottom to top. Turn the loose lower end of the zipper out of the way, over the seam allowance. Stitch as close as possible to the last stitches of the zipper seams. Trim away excess zipper and bind the end with a scrap of fabric.