

### 104B Turtleneck

Sizes 36, 38, 40, 42, 44

Back length B, approx. 73 cm (29 ins)

#### Materials

Jersey with horizontal stretch,  
width: 130 cm (51 ins)

length: 1.55 – 1.55 – 1.55 – 1.75 – 1.80 m  
(1 3/4 – 1 3/4 – 1 3/4 – 1 7/8 – 2 yds).

Vilene Bias Tape/ stay tape.

A twin sewing machine needle.

Recommended fabrics: Fine stretch jersey. Use only jersey fabrics with horizontal or two-way stretch.



#### Preparations

Print the pattern out on letter or A4 sized paper. It is very important to not scale or fit any of the pages, you must print the document in actual size. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (104B). This pattern also includes pattern pieces, lines and markings for style 104A that should be ignored.


burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:  
Seams and edges 1.5 cm (5/8 in), hem 3 cm (1 1/4 ins), sleeve hems 4 cm (1 5/8 ins) (flare sleeve hem allowance).

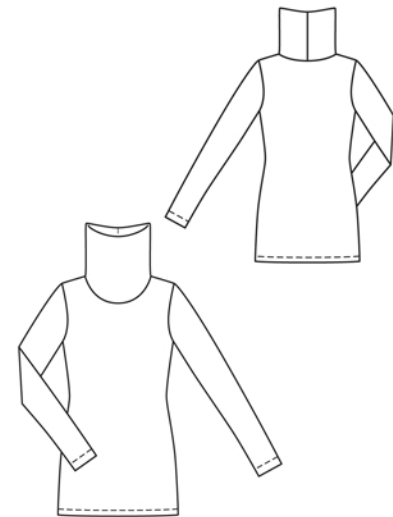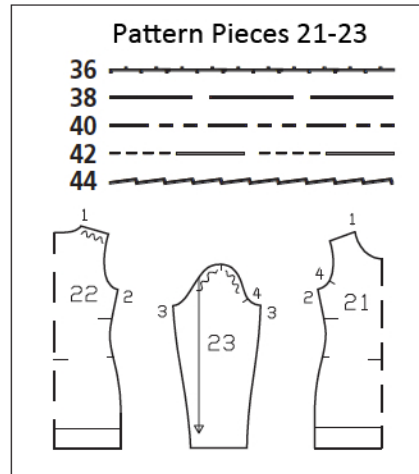


Jersey, 130cm wide

Sizes 36-40

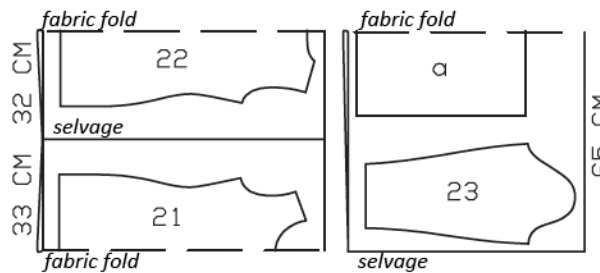

Fold the fabric as shown in the pattern layout, right side facing in.

Sizes 42, 44

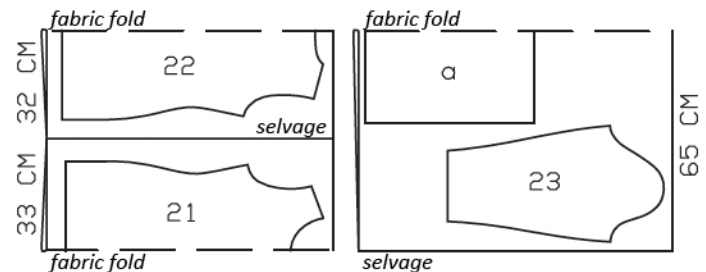

#### Cutting Out

- 21 front, on a fold 1x
- 22 back, on a fold 1x
- 23 sleeve 2x

Draft the following piece NOT included in the pattern:

a) collar, 50 – 51 – 52 – 53 – 54 cm (19 3/4 – 20 1/4 – 21 1/2 – 21 – 21 1/4 ins) long, 50 cm (20 ins) wide, finished width 25 cm (10 ins).

Vilene Bias Tape/ stay tape: Iron to wrong side of front shoulder seam edges.

### Sewing

**Note:** Stitch seams on stretch fabrics with a special stretch stitch or at a narrow zigzag setting. Stitch hems with a twin machine needle to keep them elastic.

Stitch side seams, shoulder seams, and sleeve seams. Neaten seam allowances and press seams open.

Stitch narrow collar edges together (centre back seam). Fold collar to half the width, wrong side facing in. Press. Stitch collar edges together to neck edge, stretched slightly.

Set in sleeves, easing sleeve caps.

Turn hem allowances to inside. Stitch from right side with the twin needle – stitching 2.5 cm (1 in) from lower edge of top and 3.5 cm (1 1/2 ins) from lower edge of each sleeve.

