

146 Skirt

Sizes 44, 46, 48, 50, 52

Length from waist 65 cm (25 3/4 ins)

Materials

Stretch gabardine, with widthwise stretch, width: 135 cm (53 ins)
length: 0.80 – 0.80 – 1.10 – 1.10 – 1.25 m
(7/8 – 7/8 – 1 1/4 – 1 1/4 – 1 1/2 yds).

Embroidered tulle with one scalloped edge, width: 145 cm (57 ins)
length: 1.45 – 1.55 – 1.55 – 1.65 – 1.65 m
(1 3/4 – 1 3/4 – 1 3/4 – 1 7/8 – 1 7/8 yds).

Interfacing.

1 invisible zip, 22 cm (9 ins) long. and 1 button.

Recommended fabrics: Stretch skirt fabrics with some body, combined with embroidered tulle or tulle lace with one scalloped edge. Use stretch fabrics only.

Preparations



Print the pattern out on letter or A4 sized paper. It is very important to not scale or fit any of the pages, you must print the document in actual size. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (146). This pattern also includes pattern pieces, lines and markings for style 145 and 147 that should be ignored. Note different lines for right and left edges of back vent, but cut the skirt pieces the same size initially, from the double layer of fabric.


burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:


Seams and edges 1.5 cm (5/8 in), hem 4 cm (1 5/8 ins), no allowance on lower edges of tulle skirt pieces.

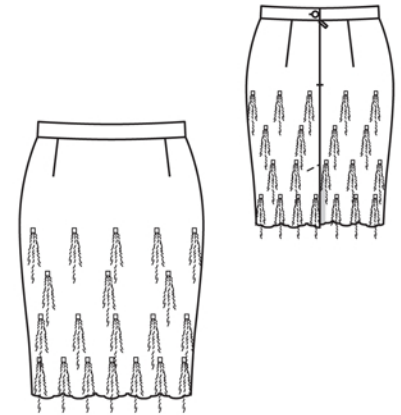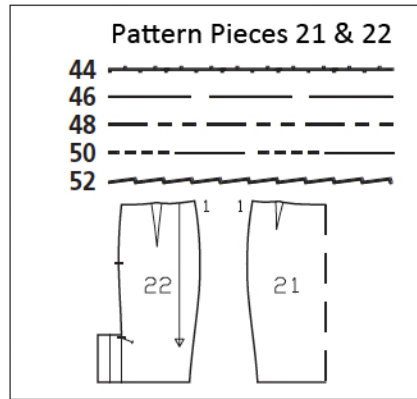


Sizes 44, 46



Sizes 48-52

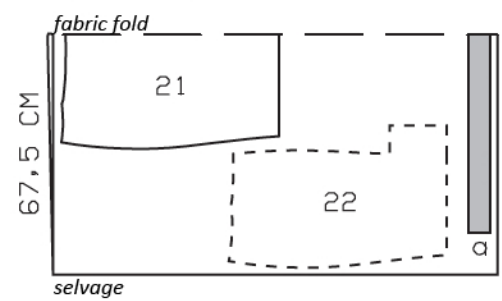

Tulle with scalloped edge, 145cm wide
Sizes 44-52

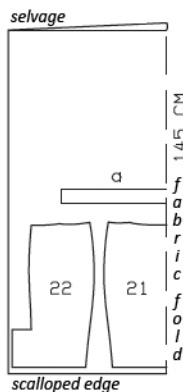

Cut from a double layer of fabric, right side facing in.

Cutting Out

Gabardine:

21 skirt front, on a fold 1x

22 skirt back 2x

Draft the following pieces NOT included in the pattern:
a) waistband, with 3 cm (1 1/4 in) underlap, 89 – 93 – 99 – 105 – 111 cm (35 – 36 3/4 – 39 – 41 1/2 – 43 3/4 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins).

Interfacing: See shaded area on pattern layout.

Tulle: pieces 21, 22, and also piece a.

Place hem edge of pattern pieces on scalloped edge of tulle so that scallops extend by 2 cm (3/4 in).

Sewing

On gabardine skirt pieces, press hem allowances to inside and sew in place by hand. Lay skirt and waistband pieces of tulle on corresponding gabardine pieces, with wrong side facing right side and with scallops extending at hem edge of skirt pieces. Baste fabric pieces together and treat as one layer of fabric from now on.


Stitch front and back darts. Press darts toward centre front/back.


Sew invisible zip to back skirt edges, see the "Helpful Hint" pm next page. Stitch centre back seam from vent to zip slit. Clip seam allowance of right skirt back slightly above vent. Press seam open. Press back vent edges to wrong side, noting different lines for right and left vent edges. On left vent edge, trim facing to 5 cm (2 ins) wide. At top of vent, topstitch left skirt back at an angle as marked, catching underlap.

Stitch waistband to upper skirt edge, leaving underlap extending at right back edge. Press allowances of attachment seam and of other long edge onto waistband. Fold waistband lengthwise and stitch across ends. Turn right side out. Sew inside waistband edge to attachment seam, by hand, sewing underlap edges together. Work buttonhole in left back waistband end.

At hem edge, unfold facings. Press hem allowance to inside and sew in place by hand. Turn facings to inside again and sew in place, over hem.

Sew lower edges of seam allowances to hem edge.

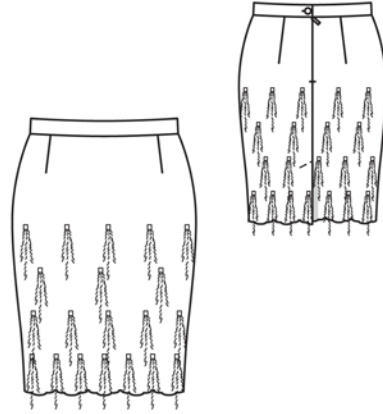

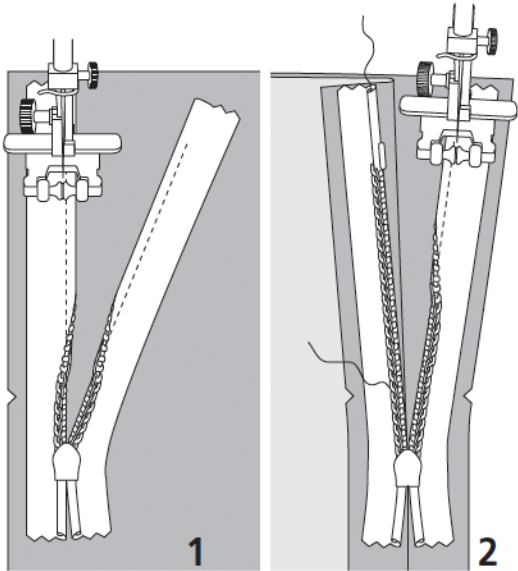

These special zippers come in various lengths. The zipper should be at least 2 cm (3/4 in) longer than the slit. It is sewn in place before the seam below the slit is stitched. A special presser foot is required to sew the zipper in place.

Sewing the zipper in place:

Open the zipper and push the coil back with your thumbnail to reveal the seam marking between the tape and the coil. Place the open zipper right side down on the right fabric side of one slit edge.

In order to stitch the zipper in place exactly along the marked seam line, you must first calculate the distance between the tape edge and the fabric edge as follows: width of seam allowance minus 1 cm (3/8 in) tape width = distance from edge of fabric. This will yield a value of 5 mm (3/16 in) if the width of the seam allowance is 1.5 cm (5/8 in).

Pin the top end of the zipper tape in place, the calculated distance from the edge of the fabric. The bottom end of the zipper will extend past the marked end of the slit. Place the presser foot on the zipper so that the coil is in the notch to the right of the needle (1). Stitch zipper in place, from the top to the marked end of the slit. Close zipper.

Place the other zipper tape face down on the opposite slit edge and pin in place at the top. Open zipper again. Place the presser foot on the top end of the zipper so that the coil is in the notch to the left of the needle (2). Sew the zipper in place, from the top to the end of the slit. Close zipper.

Now stitch the seam below the zipper, from bottom to top. Turn the loose lower end of the zipper out of the way, over the seam allowance. Stitch as close as possible to the last stitches of the zipper seams. Trim away excess zipper and bind the end with a scrap of fabric.