

147 Skirt

Sizes 44, 46, 48, 50, 52

Length from waist 110 cm (43 1/2 ins)

Materials

Lamb nappa leather. To make this style in size 44, you will need 3 leather skins with a total of approx. 27 sq. ft. (1 sq. ft. = 30 x 30 cm). Ask your leather dealer about requirements for larger sizes since leather skins can vary greatly. We recommend taking the paper pattern with you when buying the leather.

Stretch gabardine, with widthwise stretch, width: 135 cm (53 ins)
length: 0.70 – 0.70 – 0.70 – 0.70 – 1.10 m
(7/8 – 7/8 – 7/8 – 7/8 – 1 1/4 yds).

Interfacing.

1 invisible zip, 22 cm (9 ins) long.

1 button. Textile glue (e.g. Rudolfix, Gütermann Klebenaht HT 2).

Recommended fabrics: Stretch skirt fabrics with some body, combined with soft leather or imitation leather. Use only stretch skirt fabrics.



Preparations

Print the pattern out on letter or A4 sized paper. It is **very** important to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (147). This pattern also includes pattern pieces, lines and markings for style 145 & 146 that should be ignored.

burda style magazine patterns do not have seam allowance included. Seam and hem allowance to be added:

Seams and edges 1.5 cm (5/8 in), no allowances on hem edges.

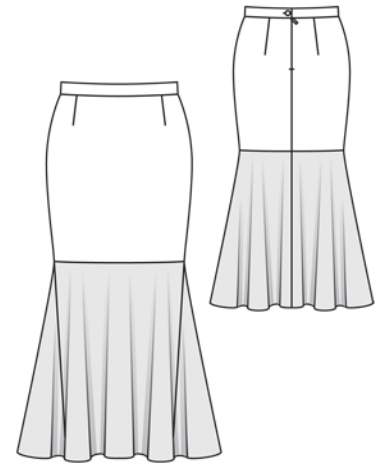
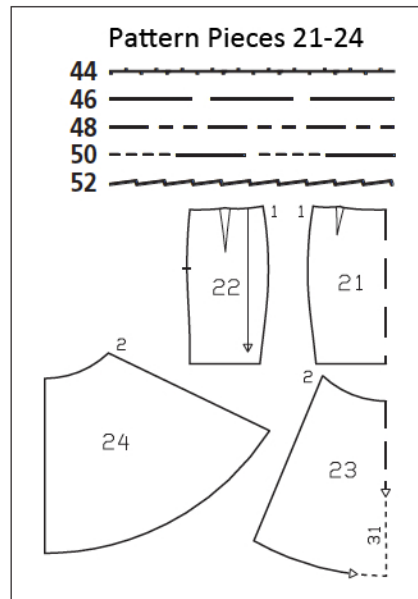


Gabardine, 135cm wide

Sizes 44-50

Size 52

Cut from a double layer of fabric, right side facing in.

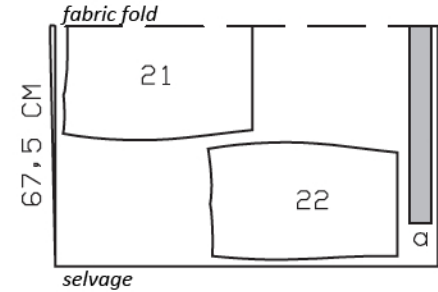

Cut remaining pieces from leather. Due to the varying sizes of leather skins, there is no pattern layout.

Cutting Out

Gabardine:

21 upper skirt front, on a fold 1x

22 upper skirt back 2x

Draft the following piece NOT included in the pattern:

a) waistband, with 3 cm (1 1/4 in) underlap, 89 – 93 – 99 – 105 – 111 cm (35 – 36 3/4 – 39 – 41 1/2 – 43 3/4 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins).

Leather:

23 lower skirt front, on a fold 1x

24 lower skirt back 2x

Interfacing: See shaded area on pattern layout.

Sewing


Stitch front and back darts. Press darts toward centre front/back.

Sew invisible zip to back skirt edges, see the "Helpful Hint" on next page. Stitch centre back seam from lower edge to zip. Press seam allowances open.

Stitch side seams (seam number 1).

Stitch waistband to upper skirt edge, leaving underlap extending at right back edge. Press allowances of attachment seam and of other long edge onto waistband. Fold waistband lengthwise and stitch across ends. Turn right side out. Sew inside waistband edge to attachment seam, by hand, sewing underlap edges together. Work buttonhole in left back waistband end.

Stitch centre back seam and side seams on leather lower skirt pieces. Spread seam allowances open and glue in place. Stitch lower skirt unit to lower edge of upper skirt. Press seam allowances down.

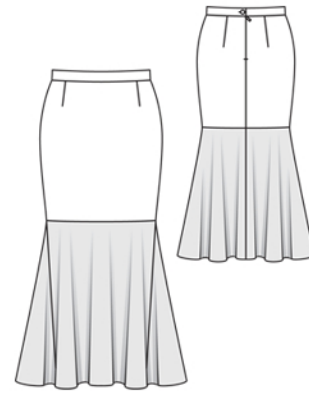



These special zippers come in various lengths. The zipper should be at least 2 cm (3/4 in) longer than the slit. It is sewn in place before the seam below the slit is stitched. A special presser foot is required to sew the zipper in place.

Sewing the zipper in place:

Open the zipper and push the coil back with your thumbnail to reveal the seam marking between the tape and the coil. Place the open zipper right side down on the right fabric side of one slit edge.

In order to stitch the zipper in place exactly along the marked seam line, you must first calculate the distance between the tape edge and the fabric edge as follows: width of seam allowance minus 1 cm (3/8 in) tape width = distance from edge of fabric. This will yield a value of 5 mm (3/16 in) if the width of the seam allowance is 1.5 cm (5/8 in).

Pin the top end of the zipper tape in place, the calculated distance from the edge of the fabric. The bottom end of the zipper will extend past the marked end of the slit. Place the presser foot on the zipper so that the coil is in the notch to the right of the needle (1). Stitch zipper in place, from the top to the marked end of the slit. Close zipper.

Place the other zipper tape face down on the opposite slit edge and pin in place at the top. Open zipper again. Place the presser foot on the top end of the zipper so that the coil is in the notch to the left of the needle (2). Sew the zipper in place, from the top to the end of the slit. Close zipper.

Now stitch the seam below the zipper, from bottom to top. Turn the loose lower end of the zipper out of the way, over the seam allowance. Stitch as close as possible to the last stitches of the zipper seams. Trim away excess zipper and bind the end with a scrap of fabric.