

104 Skirt

Sizes 34, 36, 38, 40, 42

Skirt length 64 cm (25 1/4 ins)

Upper skirt edge is 4 cm (1 5/8 ins) below waist

Materials

Novelty fabric, with horizontal print and a pattern repeat of 35 cm (approx. 14 ins)
width: 140 cm (55 ins)
length: 1.10 m (1 1/4 yds) for all sizes.

Fine corduroy,
width: 150 cm (59 ins)
length: 0.35 m (1/2 yd).

Elastic, 2.5 cm (1 in) wide and 0.70 – 0.75 – 0.80 – 0.85 – 0.85 m (7/8 – 7/8 – 7/8 – 1 – 1 yd) long.

Fringe trim, with 3 cm (1 1/4 in) long fringe
length: 1.20 – 1.25 – 1.30 – 1.35 – 1.35 m (1 3/8 – 1 1/2 – 1 1/2 – 1 5/8 – 1 5/8 yds) of each of 2 different colours.

Embroidery thread in 2 different colours.

Embroidery needle with a sharp point.



Recommended fabrics: Skirt fabrics of wools or blends, combined with fine corduroy.

Preparations


Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (104). This pattern also includes pattern pieces, lines and markings for style 105 that should be ignored.

Trace the pocket piece from piece 21 as a separate pattern piece.

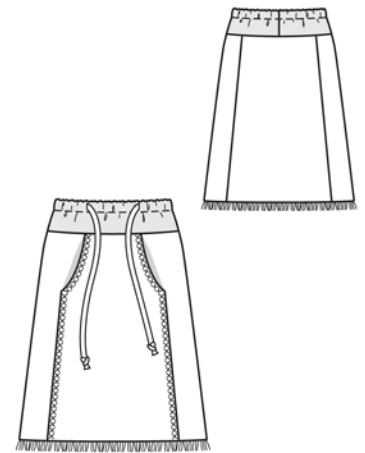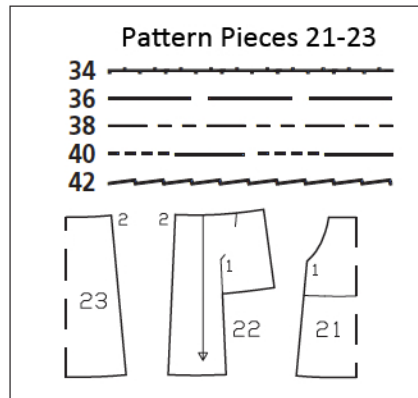

Right side faces in on a double layer of fabric; right side faces up on a single layer of fabric. Note pattern repeat on skirt panels. Note direction of nap on corduroy.

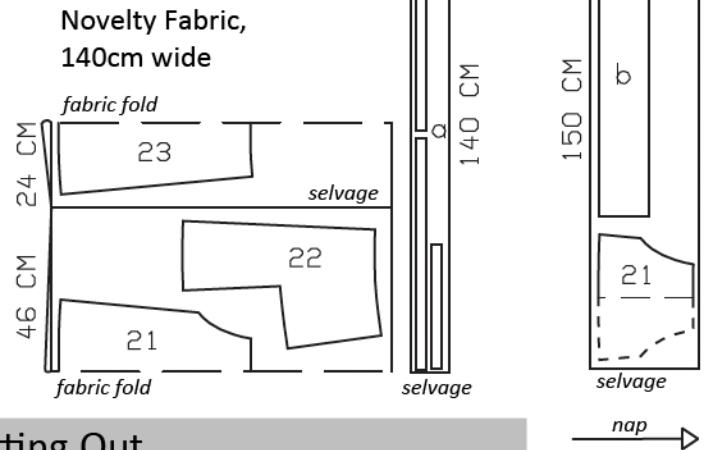

Cutting Out

Novelty fabric:
21 front skirt panel, on a fold 1x
22 side skirt panel with integrated pocket piece 2x
23 back skirt panel, on a fold 1x
Draft the following pieces NOT included in the pattern:
a) drawstring, in 3 pieces: right and left piece each 65 cm (25 3/4 ins) long, centre piece 35 cm (13 3/4 ins) long, all pieces 3 cm (1 1/4 ins) wide, finished width 1.5 cm (5/8 in).

Corduroy:
21 pocket piece, on a fold 1x

b) yoke, 86 – 90 – 94 – 98 – 102 cm (34 – 35 1/2 – 37 – 38 3/4 – 40 1/4 ins) long, 14 cm (5 1/2 ins) wide, finished width 7 cm (2 3/4 ins).


burda style magazine patterns do not have seam allowance included.
Seam and hem allowance to be added:
Seams, edges, and hem 1.5 cm (5/8 in).

Sewing

Hip yoke pocket and front section seams: Lay pocket piece right sides together with front skirt panel and stitch together along pocket opening edges. Turn lower pocket edge up and pin. Lay side skirt panels right sides together with front skirt panel. Stitch front section seams below pocket openings. Press seam allowances toward centre. Turn pocket to inside. Press pocket opening edges and pin to side skirt panels (placement lines). On inside, turn side edges of pocket under and sew to section seams by hand. On integrated pocket pieces of side skirt panels, stitch centre seam. Press seam allowances open. Baste upper pocket edges in place. Stitch lower pocket piece edges together.

With two strands of embroidery thread (2 different colours), work cross stitches, 1.5 cm (5/8 in) in size, along section seams and pocket opening edges of skirt front.

Stitch skirt back to side panels. Stitch yoke seam (= centre back seam). Mark centre front on yoke. Fold yoke in half lengthwise, wrong side facing in. Press fold edge. Unfold yoke again. On outer half of yoke, work two vertical slits for drawstring (like buttonholes), each 1.5 cm (5/8 in) long and spaced 8 cm (3 1/4 ins) from centre front and 7 mm (1/4 in) from fold edge. First iron small pieces of interfacing to wrong side of fabric, as reinforcement. Fold yoke again. Topstitch 3 cm (1 1/4 ins) from fold edge, to form elastic casing, leaving approx. 5 cm (2 ins) open, for elastic. Pull elastic into casing sew ends together to a circumference of 66 – 70 – 74 – 78 – 82 cm (26 – 27 3/4 – 29 1/4 – 30 3/4 – 32 1/2 ins). Stitch seam opening closed. Stitch long edges of yoke together to upper skirt edge. Press seam allowances down.

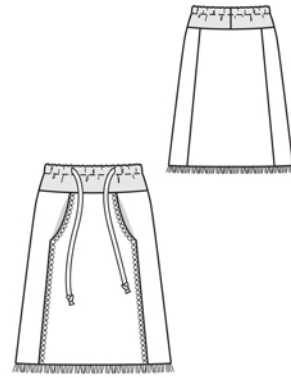

Stitch the 3 drawstring pieces together. Fold drawstring in half lengthwise, wrong side in. Stitch 1.5 cm (5/8 in) from fold edge. Trim away seam allowances, close to stitching. Finish edges with zigzag stitching. Pull drawstring through one slit, along casing, and out through the 2nd slit. Knot ends of drawstring.

On lower skirt edge, trim away allowance and neaten edge with an overlock or zigzag stitch. Lay both fringe trims together and zigzag stitch to inside lower edge of skirt.