

### 116 Wrap Dress

Burda sizes 17, 18, 19, 20, 21

Length from waist 60 cm (23 3/4 ins)

3/4-sleeves, approx. 45 cm (18 ins) long

### Materials

Stretch satin, with widthwise stretch,  
width: 150 cm (59 ins)

length: 2.15 – 2.20 – 2.20 – 2.25 – 2.25 m  
(2 1/2 – 2 1/2 – 2 1/2 – 2 5/8 – 2 5/8 yds).

Interfacing.

2 large sew-on snap fasteners.

Recommended fabrics: Stretch dress fabrics. Use only fabrics with widthwise or two-way stretch.

### Preparations



Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (116). This pattern also includes pattern pieces, lines and markings for style 114 & 115 that should be ignored.

Cut piece 2 apart on the marked seam line = back and back skirt piece. The pleat arrows on piece 1 are marked for size 17. For the other sizes, remark the pleat arrows accordingly.

**burda style magazine patterns do not have seam allowance included.**

Seam and hem allowance to be added:  
Seams and edges 1.5 cm (5/8 in), hem 4 cm (1 5/8 ins).

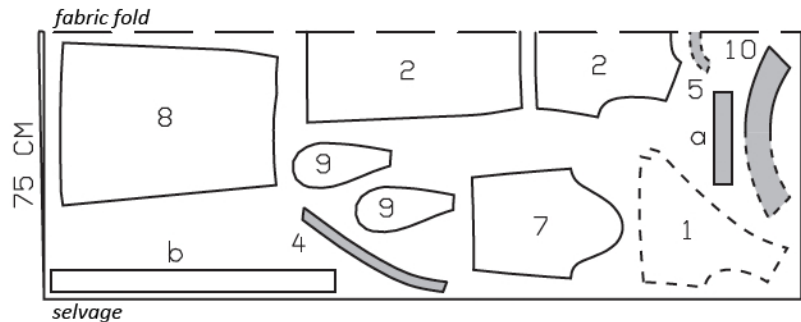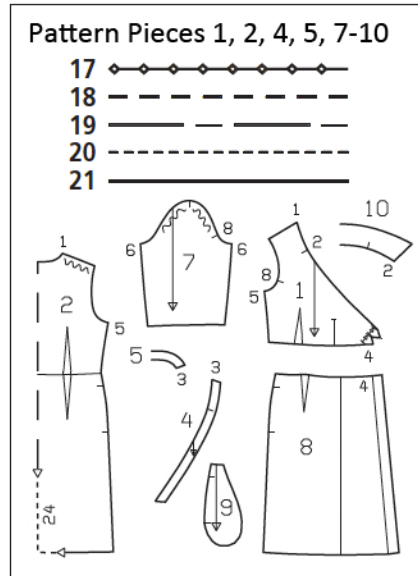

Cut from a double layer of fabric, right side facing in.

### Cutting Out

- 1 front 2x
- 2 back, on a fold 1x
- 2 skirt back, on a fold 1x
- 4 front neck facing 2x
- 5 back facing, on a fold 1x
- 7 sleeve 2x
- 8 skirt front 2x
- 9 pocket piece 4x
- 10 collar, on a fold 2x

Draft the following pieces NOT included in the pattern:

- a) 2 sleeve bands, each 25 – 26 – 27 – 28 – 29 cm (10 – 10 1/4 – 10 3/4 – 11 1/8 – 11 1/2 ins) long, 4 cm (1 1/2 ins) wide, finished width 2 cm (3/4 in),
- b) tie belt, a total of 155 – 160 – 165 – 170 – 175 cm (61 – 63 – 65 – 67 – 69 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins).

Interfacing: See shaded area on pattern layout.

## Sewing

Stitch darts in bodice pieces. Press darts toward centre. Fold front pleats in direction of arrows and baste. Stitch shoulder seams on bodice and facing. Press seam allowances open.

Stitch collar pieces together along outer edges, right sides facing. Trim seam allowances. Turn collar right side out and press. Baste attachment edges of collar together to neck edge (seam number 2).

Neck edge: Pin facing right sides together with neck edge, catching collar between blouse and facing. Stitch along neck edge. Trim seam allowances. Turn facing up and stitch to seam allowances, close to seam. Turn facing to inside and sew to shoulder seams. Baste front facing ends in place.


Stitch side seams on bodice.

Stitch sleeve seams. Stitch ends of each sleeve band together to form a ring. Stitch sleeve bands to lower sleeve edges. Press seam allowances onto sleeve bands. Fold sleeve bands half to inside. Turn inside edges under and baste in place. Topstitch sleeve bands close to attachment seam.

Set in sleeves, easing sleeve caps.

Stitch darts in skirt pieces and press toward centre. Stitch skirt side seams, not stitching across pocket openings.

Inseam pockets: Pin pocket pieces to inside of seam allowances of pocket opening edges and stitch in place directly along marked seam lines. Above pocket opening edges, stitch pocket pieces in place close to seam. Press pocket pieces forward and stitch together. Baste upper pocket edges in place.

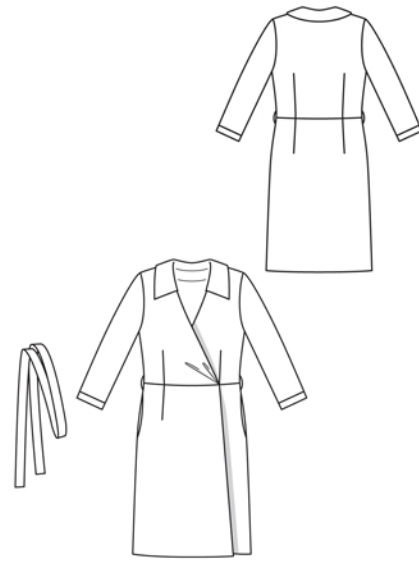

Pin bodice right sides together with upper skirt edge – front edge meets facing fold line. Fold self-facings of bodice over front edges of skirt and pin to upper skirt edge. Stitch waist seam. Turn facings to inside and turn bodice up. Press seam allowances down.

Stitch hem corners as mitred corners: Turn self-facings and hem allowance to outside and stitch diagonally. Trim allowances of mitring seams to 5 mm (3/16 in) and press open. Turn corners right side out.

Press front and hem edges. Stitch hem in place by hand.

Fold tie belt lengthwise, right side facing in. Stitch edges together, leaving a section of seam open, for turning. Trim seam allowances, trimming corners diagonally. Turn belt right side out and press edges. Sew seam opening closed.

Make thread loops, approx. 4 cm (1 5/8 ins) long, at side seams, over skirt attachment seam. For each loop, stretch 3–4 threads then cover them with closely spaced buttonhole stitches.

Fasten front edges of right and left front at skirt attachment seam, with one snap each.