

### 128 Pullover

**Burda sizes 36, 38, 40, 42, 44**

Back length approx. 75 cm (30 ins) (with hem band)

### Materials

Knit fabric,  
width: 135 cm (53 ins)  
length: 1.55 – 1.55 – 1.60 – 1.60 – 1.60 m (1 3/4 yds).

Vilene Bias Tape/stay tape.

Bias tape, 4 cm (1 5/8 ins) wide and 0.80 – 0.80 – 0.80 – 0.85 – 0.85 m (7/8 – 7/8 – 7/8 – 1 – 1 yd) long.

Recommended fabrics: Knit fabrics or jersey. Use stretch knits only.



### Preparations

Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.


Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (128). This pattern also includes pattern pieces, lines and markings for style 129 that should be ignored.

**burda style magazine patterns do not have seam allowance included.**

Seam and hem allowance to be added:  
Seams, edges, and hem 1.5 cm (5/8 in).

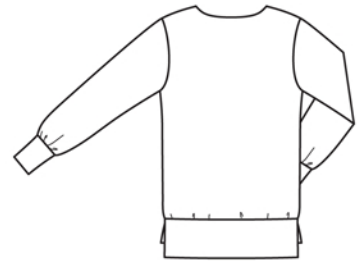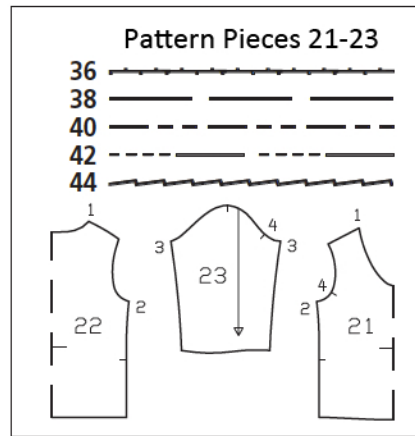

Fold the fabric as shown in the pattern layout, right side facing in.

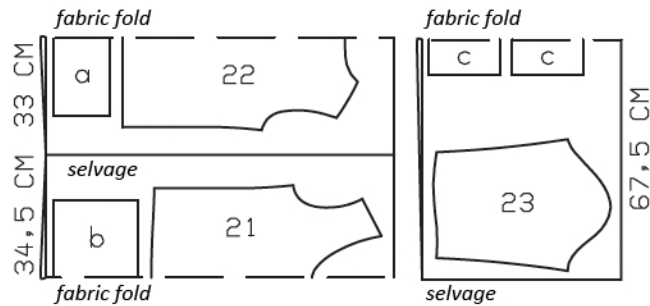

### Cutting Out

- 21 front, on a fold 1x
- 22 back, on a fold 1x
- 23 sleeve 2x

Draft the following pieces NOT included in the pattern:

- a) front hem band, 43 – 45 – 47 – 49 – 51 cm (17 – 17 3/4 – 18 1/2 – 19 1/4 – 20 1/4 ins) long, 16 cm (6 1/2 ins) wide, finished width 8 cm (3 1/4 ins),
- b) back hem band, 43 – 45 – 47 – 49 – 51 cm (17 – 17 3/4 – 18 1/2 – 19 1/4 – 20 1/4 ins) long, 24 cm (9 1/2 ins) wide, finished width 12 cm (4 3/4 ins),
- c) 2 sleeve bands, 20 – 20 – 21 – 22 – 22 cm (8 – 8 – 8 3/8 – 8 3/4 – 8 3/4 ins) long, 20 cm (8 ins) wide, finished width 10 cm (4 ins).

Vilene Bias Tape/stay tape: Iron to wrong side of front shoulder edges.

## Sewing

**Note:** Stitch seams on stretch fabrics with a special stretch stitch or at a narrow zigzag setting.

Stitch right shoulder seam. Press seam allowances open.

**Neck edge:** Fold bias tape in half lengthwise and press. Stitch folded bias tape to right fabric side of neck edge so that fold edge of tape lies on garment piece, 1 cm (3/8 in) past seam line. Trim seam allowances. Turn bias tape to inside. Sew inside edge of bias tape in place by hand.

Stitch left shoulder seam. Press seam allowances open. Sew ends of seam allowances to neck edge.

Stitch side seams and sleeve seams.

Stitch ends of each sleeve band together. Fold sleeve bands in half and stitch to lower sleeve edges, stretched to fit. Press seam allowances up.

Set in sleeves.

Fold hem bands in half lengthwise, right side facing in. Stitch across ends. Turn bands right side out. Pin attachment edges together. Stitch front hem band to lower front edge and back hem band to lower back edge, stretching bands as needed. Press seam allowances up.

