

107C Trousers

Burda sizes 36, 38, 40, 42, 44

Side length with waistband, 96 cm

Waistband edge is 2 cm below waist

Hem circumference 38 cm

Materials

Canvas, with widthwise stretch,

width: 150 cm (59 ins)

length: 1.35 – 1.35 – 1.35 – 1.40 – 1.40 m (1 5/8 yds).

Piece of lining, approx. 50 x 30 cm (20 x 12 ins), for the pocket pieces.

Interfacing.

1 zip, 12 – 12 – 12 – 14 – 14 cm (5 – 5 – 5 – 5 1/2 – 5 1/2 ins) long.

1 hammer-on trouser hook fastener.

1 flat inside button.




Recommended fabrics: Lightweight trouser fabrics with some body. Fabrics with some elastane are ideal.

Preparations

Print the pattern out on letter or A4 sized paper. It is very important to not scale or fit any of the pages, you must print the document in actual size. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (107B). This pattern also includes pattern pieces, lines and markings for style 107A, 107C & 107D that should be ignored.

Trace the pocket piece from piece 21 as a separate pattern piece. The stitching line at the zip slit is marked for size 36. For sizes 38 – 44, mark the stitching line the same distance from centre front as marked for size 36, noting length of slit.

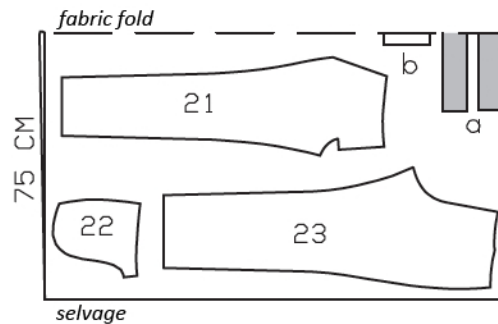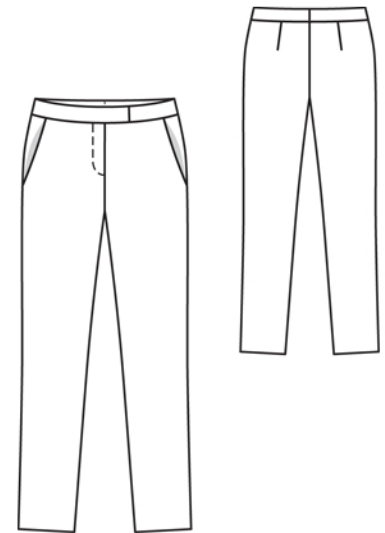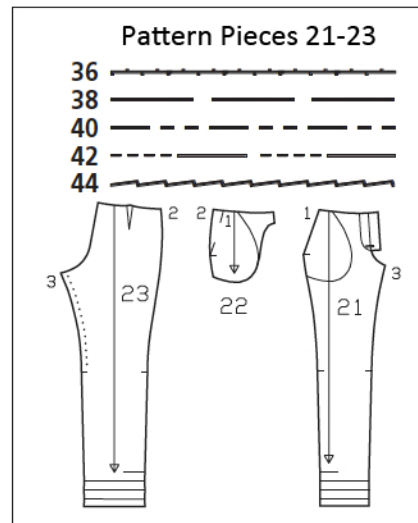

Cut from a double layer of fabric, right side facing in.

Cutting Out

Main fabric:

21 front trouser piece 2x

22 side hip yoke with integrated pocket piece 2x

23 back trouser piece 2x

Draft the following pieces NOT included in the pattern:

a) right waistband with 5 cm (2 in) overlap, 44.5 – 46.5 – 48.5 – 50.5 – 52.5 cm (17 1/2 – 18 1/4 – 19 1/8 – 20 – 20 3/4 ins) long, left waistband with 3.5 cm (1 1/2 in) underlap, 43 – 45 – 47 – 49 – 51 cm (17 – 17 3/4 – 18 1/2 – 19 1/4 – 20 1/4 ins) long, each 7 cm (3 ins) wide, finished width 3.5 cm (1 1/2 ins),

b) left underlap piece, 13 – 13 – 13 – 15 – 15 cm (5 1/4 – 5 1/4 – 5 1/4 – 6 – 6 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins).

Lining:

21 pocket piece 2x

Interfacing: See shaded area on pattern layout.

burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:

Seams and edges 1.5 cm (5/8 in), hem (1 5/8 ins).

Sewing

Stretch seam edges: Lay back trouser pieces right sides together. Press inside leg edges above seam mark, with a steam iron or under a damp cloth until they match corresponding edge on trouser front.


Stitch back darts and press toward centre.

Hip yoke pockets: Stitch pocket pieces right sides together with pocket opening edges of front trouser pieces. Turn pocket pieces up and stitch to seam allowances, close to seam. Turn pocket pieces to inside. Pin pocket opening edges to side hip yokes, at placement lines. Stitch edges of pocket pieces together. Baste pocket pieces to wrong side of front trouser pieces, first trimming away allowance of right pocket piece, along centre front.

Stitch side seams and inside leg seams. Press seam allowances open. Stitch centre front seam from slit mark to inside leg seam.

Zip slit: Press self-facings on slit edges to inside. On right edge, stitch along centre front and on left edge, stitch 5 mm (3/16 in) before centre front. Stitch zip under left slit edge (underlap), close to zip teeth. Pin slit closed, matching centre fronts. Stitch loose zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch slit as marked, from upper edge to 3 cm (1 1/4 ins) before end. Fold underlap piece lengthwise and stitch across bottom end. Turn right side out. Lay underlap under left slit edge and pin to facing. Stitch slit facing to underlap, close to zip attachment seam. Lay slit closed again and topstitch to the end, catching underlap.

Waistband and centre back seam: Fold waistband pieces in half lengthwise, wrong side facing in, and press upper waistband edge. Unfold waistband pieces again. Stitch right and left waistband to upper edges of trousers, with waistband overlap extending on the right and stitching waistband underlap to slit underlap on the left. Press seam allowances onto waistband pieces. Stitch centre back seam on trousers and waistband. Press seam open, from upper edge

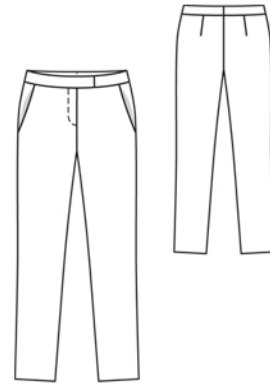

to beginning of crotch curve. Attach trousers hook to inside waistband half, 1 cm (3/8 in) from right waistband end. Fold ends of waistband, right side facing in. On left waistband end, turn allowance of inside edge up. Stitch across left waistband end. On overlap, on right end, turn seam allowances down again and stitch along lower overlap edge and across right waistband end. Turn waistband right side out. On front, turn inside waistband edge under, approx. 4 cm (1 5/8 ins) long and baste, then lay remaining edge flat over attachment seam. Working from outer side, stitch along waistband attachment seam, catching inner edge. Work a buttonhole in left waistband end. Sew button to inside of waistband. Attach bar of trousers fastener to waistband, to match hook.

Press hem allowances to inside and sew in place by hand.