

104A Top

Burda sizes 36, 38, 40, 42, 44

Back length approx. 75 cm (30 ins) (with hem band)

Materials

fine wool jersey,
width: 110 cm (44 ins)
length: 1.55 – 1.60 – 1.85 – 1.85 – 1.90 m
(1 3/4 – 1 3/4 – 2 1/8 – 2 1/8 – 2 1/8 yds).

Recommended fabrics: Softly draping fabrics. For the hem band, use only stretch jersey or knits.

Preparations

Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for your size.

burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:
Seams and edges 1.5 cm (5/8 in, no allowances on neck and armhole edges.



Cutting Out

Wool jersey:
21 front, on a fold 1x
22 back, on a fold 1x


Draft the following pieces NOT included in the pattern:

a) binding strip for neck edge, 70 – 72 – 74 – 76 – 77 cm (27 3/4 – 28 1/2 – 29 1/4 – 30 – 30 1/2 ins) long, 6 cm (2 3/8 ins) wide (incl. allowances),

b) 2 binding strips for armholes, 52 – 53 – 55 – 56 – 58 cm (20 1/2 – 21 – 21 3/4 – 22 1/4 – 23

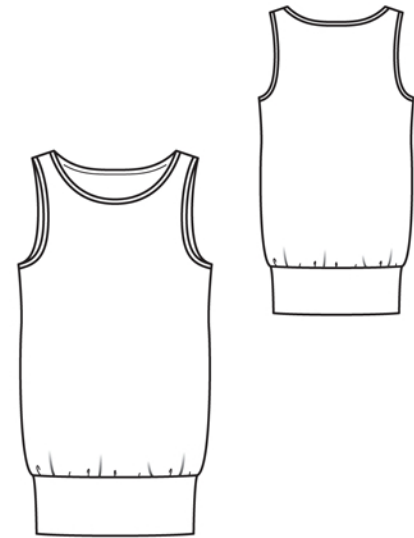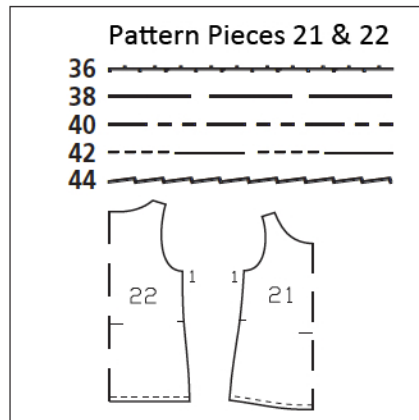


Sizes 36, 38

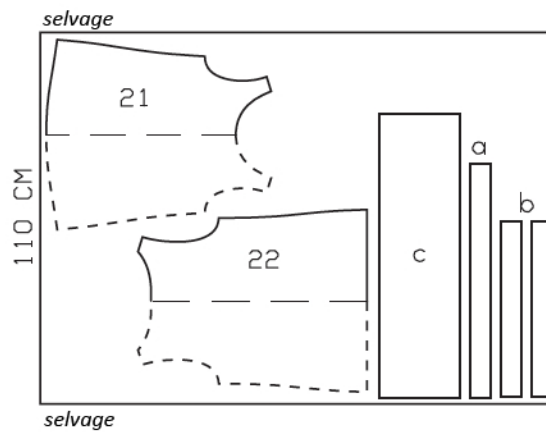

Right side faces in on a double layer of fabric; right side faces up on a single layer of fabric.

Sizes 40-44

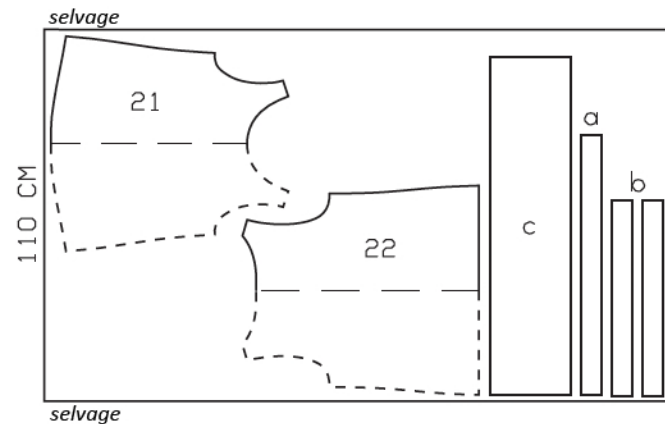

ins) long, 6 cm (2 3/8 ins) wide (incl. allowances),

c) hem band, 84 – 88 – 92 – 96 – 100 cm (33 – 34 3/4 – 36 1/4 – 37 3/4 – 39 1/2 ins) long, 24 cm (9 1/2 ins) wide, finished width 12 cm (4 3/4 ins).

Sewing

Stitch left shoulder seam. Trim seam allowances to 7 mm (1/4 in) wide, neaten together, and press onto back.

Bind neck edge: Fold binding strip in half lengthwise, right side facing out, and press. Pin folded bias strip to inside of neck edge and stitch in place, 7 mm (1/4 in) from edge. Fold binding strip over neck edge to outside, and baste over attachment seam. Edgestitch binding in place.

Stitch right shoulder seam. Trim seam allowances, neaten together, and press onto back. Sew ends of allowances to neck edge.

Bind armhole edges as described for neck edge.

Stitch side seams. Trim seam allowances, neaten together, and press onto back. Sew upper ends of seam allowances in place by hand.

Gather lower front and back edges slightly, to a circumference of 90 – 94 – 98 – 102 – 106 cm (35 1/2 – 37 – 38 3/4 – 40 1/4 – 41 3/4 ins).

Hem band: Stitch narrow edges of hem band together. Press seam allowances open. Fold hem band in half lengthwise, wrong side facing in. Stitch hem band edges together to lower edge of front and back, stretched to match. Seam of hem band must meet one side seam. Press seam allowances up.

