

125 Trousers

Burda sizes 36, 38, 40, 42, 44, p. 21

Side length with waistband 98 cm

Waistband edge is 2 cm below waist

Hem circumference 35 cm (14 ins)

Materials

Stretch twill, with widthwise stretch,

width: 145 cm (57 ins)

length: 1.15 m (1 3/8 yds) for all sizes.

Twill weave wool, in a contrasting color,

width: 150 cm (59 ins)

length: 0.15 m (1/4 yd).

Pigskin suede for the inside leg bands.

To make this style in size 36, you will need 1 leather skin with approx. 9 sq. ft. (1 sq. ft. = 30 x 30 cm).

Vilene/Pellon G 785. 1 zip, 12 – 12 – 12 – 14 – 14 cm (5 – 5 – 5 – 6 – 6 ins) long.

1 flat inside button and 1 no-sew trouser hook fastener.



Recommended fabrics: Stretch trouser fabrics. Use only fabrics with widthwise or two-way stretch, combined with soft leather or imitation leather for the inside leg bands.

Preparations


Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (125). This pattern also includes pattern pieces, lines and markings for style 124 that should be ignored.

Trace bands from pieces 21 and 22 as separate pattern pieces.

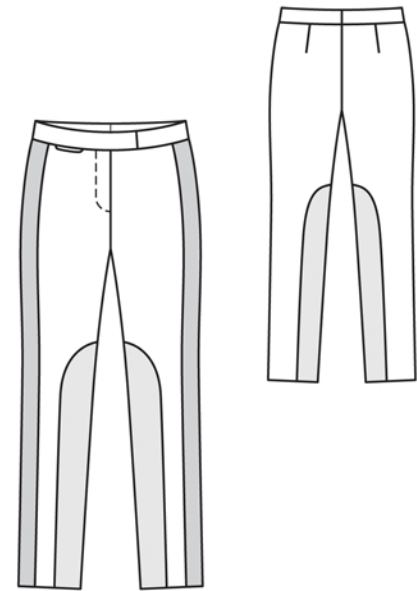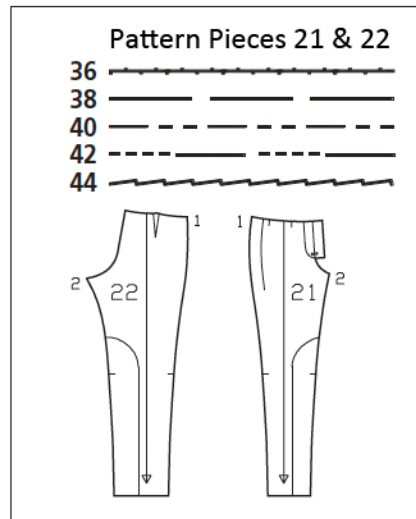

Cut from a double layer of fabric right side facing in.

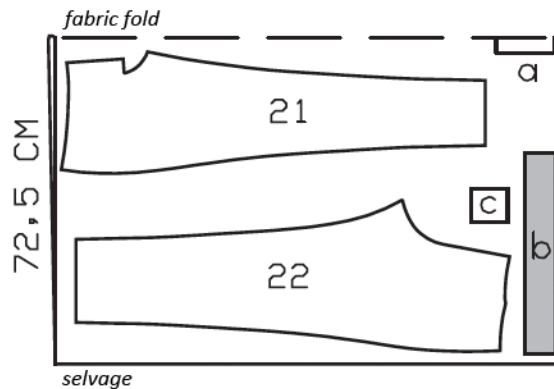

Cutting Out

21 front trouser piece 2x

22 back trouser piece 2x

Draft the following pieces NOT included in the pattern:

a) left underlap, 13 – 13 – 13 – 15 – 15 cm (5 1/4 – 5 1/4 – 5 1/4 – 6 – 6 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins)

Continued on next page...

The stitching line at zip slit is marked for size 36. For sizes 38 – 44, mark this line the same distance from centre front as for size 36, noting length of slit. The attachment line for the side leg band on piece 21 is marked for size 36. Mark this line down to hem edge. For remaining sizes, mark this line the same distance from corresponding size line as marked for size 36.

burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (1 5/8 ins) (also on side bands).

Cutting Out Continued...

b) right waistband with 5 cm (2 in) overlap, 44.5 – 46.5 – 48.5 – 50.5 – 52.5 cm (17 1/2 – 18 1/4 – 19 1/8 – 20 – 20 3/4 ins) long, left waistband with 3.5 cm (1 1/2 in) underlap, 43 – 45 – 47 – 49 – 51 cm (17 – 17 3/4 – 18 1/2 – 19 1/4 – 20 1/4 ins) long, each 7 cm (3 ins) wide, finished width 3.5 cm (1 1/2 ins),

c) 2 pocket pieces, 10 cm (4 ins) wide, 11 cm (4 3/8 ins) long (incl. allowances).

Twill weave wool:

2 side bands, 95 cm (37 1/2 ins) long, 4 cm (1 5/8 ins) wide.

Pigskin suede:

21 front inside leg band 2x

22 back inside leg band 2x

Interfacing: See shaded area on pattern layout.


Sewing

Stitch back darts and press toward centre back.

Trim away allowances on outer edges of front and back inside leg bands (not on inside leg seam edges). Lay bands on trouser pieces, with wrong side facing right side, and edgestitch close outer edges in place. Stitch bands to seam allowances of inside leg seams.

Lay side bands on trouser fronts, right sides facing – bands point forward. Stitch bands along attachment lines, press to the side, and baste.

Inseam pockets (waistband attachment seam): Pin one pocket piece to pocket opening edge of right front, between seam marks, right sides facing. At beginning of pocket opening, stitch across seam allowance to 3 mm (1/8 in) below marked seam line, then stitch 3 mm (1/8 in) from marked seam line to length of pocket opening, and stitch up again at end of pocket opening. Trim seam allowances and clip into corners. Turn pocket piece to inside and press pocket opening edge. Lay remaining pocket piece on attached pocket piece, on the inside – seam allowance of this piece extends past pocket opening. Stitch pocket pieces together.

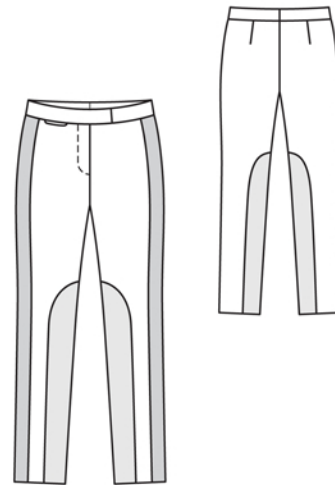

Stitch side seams and inside leg seam. Press seams open. Stitch centre front seam from slit mark to inside leg seam.

Zip slit: Press self-facings on slit edges to inside – along centre front on the right and 5 mm (3/16 in) before centre front on the left. Stitch zip under left slit edge (underlap), stitching close to teeth of zip. Pin slit closed, matching centre fronts. Stitch loose zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch slit from upper edges to 3 cm (1 1/4 ins) before end, as marked. Fold underlap piece lengthwise, right side facing in, and stitch across bottom end. Turn right side out. Lay underlap under left slit edge and pin to facing. Stitch facing to underlap, close to zip attachment seam. Lay slit closed again and topstitch to the end, catching underlap.

Waistband and centre back seam: Fold waistband pieces in half lengthwise, wrong side facing in, and press upper waistband edge. Unfold waistband pieces again. Stitch right and left waistband to upper trousers edges. Leave waistband overlap extending at the right and stitch waistband underlap to slit underlap on the left. Press seam allowances onto waistband pieces. Stitch centre back seam, stitching across waistband ends. Spread seam allowances open, from upper edges to beginning of crotch curve, and glue in place (textile adhesive). Attach trousers hook to inside half of right waistband, 1 cm (3/8 in) from end. Fold waistband ends lengthwise, right side facing in. On left waistband end, turn allowance of inside waistband edge up. Stitch across left waistband end. On right overlap, turn seam allowances down again and stitch along lower overlap edge and across right waistband end. Turn waistband right side out. In front, turn inside waistband edge under, approx. 3 cm (1 1/4 ins) long, then lay remaining edge flat over attachment seam, not turned under. Work from right side of garment to stitch along attachment seam, catching inside waistband edge. On left waistband end, mark a buttonhole for inside button. Then stitch closely around buttonhole marking and slash between lines of stitching. Sew button to inside of waistband. Attach bar of trousers fastener to waistband, to match hook.

Press hem allowances to inside and sew in place by hand.