

120 Top

Burda sizes 36, 38, 40, 42, 44

Back length approx. 60 cm (24 ins)

Materials

Fulled loden fabric,
width: 140 cm (55 ins)
length: 1.35 – 1.35 – 1.35 – 1.40 – 1.40 m (1 5/8 yds).

Vilene Bias Tape/ stay tape.

Band, 1.2 cm (1/2 in) wide and 2.10 – 2.10 – 2.15 – 2.15 – 2.20 m (2 3/8 – 2 3/8 – 2 1/2 – 2 1/2 – 2 1/2 yds) long.

1 metal zip, 35 cm (14 ins) long.

Recommended fabrics: Fulled loden. Use only fabrics which do not fray.

Preparations


Print the pattern out on letter or A4 sized paper. It is **very important** to not scale or fit any of the pages, you must print the document in **actual size**. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to it's corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (120). This pattern also includes pattern pieces, lines and markings for other styles that should be ignored.


burda style magazine patterns do not have seam allowance included.

To be added:

Seams and edges 1.5 cm (5/8 in), no allowances on lower edges of front and back.

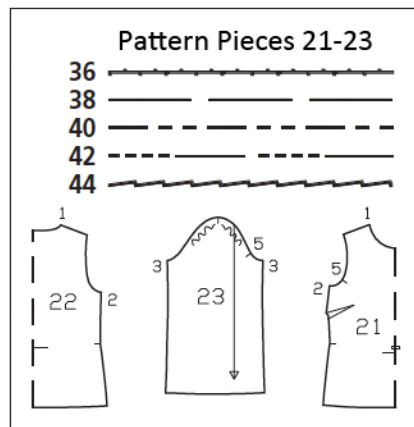

Fold the fabric as shown in the pattern layout, right side facing in.

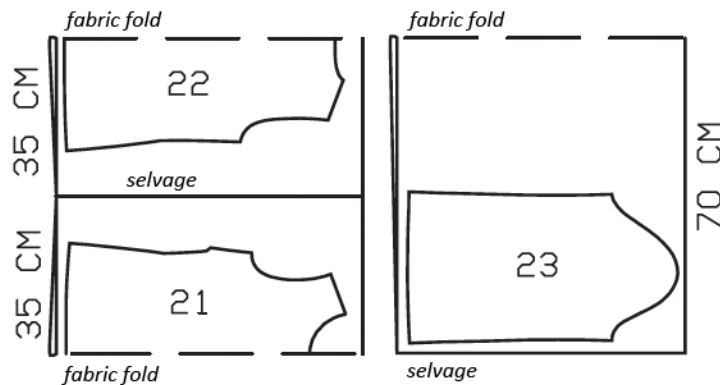

Cutting Out

21 front, on a fold 1x
22 back, on a fold 1x
23 sleeve 2x

Vilene Bias Tape/ stay tape: Iron to wrong sides of neck and armhole edges and front shoulder seam edges.

Sewing

Stitch bust darts. Cut darts along centres and press open, pressing points of darts flat.

Mark centre front with basting stitches. Lay zip on front over marking – teeth of zip begin at neck edge. Pin zip tapes in place. Turn top ends of zip tapes to outside. Stitch zip tapes in place, 5 mm (3/16 in) from teeth of zip. Working from inside, cut fabric along centre front and trim close to teeth of zip – cut horizontally across lower end of zip.

Stitch shoulder seams, beginning and ending stitching exactly at marked neck edge. Press seams open.

Pin band to inside of neck edge – upper edge of band meets marked neck edge. Turn ends of bands under at slit edges. Edgestitch band in place. Trim away seam allowance of neck edge.

For the zip, cut a piece of band, 80 cm (31 1/2 in) long. Turn one end of band under, 1 cm (3/8 in) wide. First pin band to front, over one zip tape, so that turned-under end meets neck edge. At lower end of zip, lay band horizontally, then fold it to a point and lay it vertically up over other zip tape. Turn upper end of tape under. Edgestitch band edges in place.

Stitch side seams. Press seam allowances open. Trim bottom ends of seam allowances at angles.

Stitch band to sleeves, along marked lower edges. Trim away extending sleeve allowances. Stitch sleeve seams. Press seams open. Sew lower ends of sleeve seam allowances in place.

Set in sleeves, easing sleeve caps.

