

111 Trousers

Burda sizes 34, 36, 38, 40, 42, 44

Side length from waist 107 cm (42 1/4 ins)

(upper waistband edge = waist)

Hem circumference 40 cm (16 ins)

Materials

Stretch jersey,
width: 150 cm (59 ins)
length: 1.10 m (1 1/4 yds) for all sizes.

Silk satin, as a contrasting fabric,
width: 140 cm (55 ins)
length: 0.55 m (3/4 yd).

A twin sewing machine needle. Magic chalk.

Recommended fabrics: Jersey. Satin for contrasting fabric. Use stretch fabrics only. Fabrics with some elastane are ideal.


Preparations

Print the pattern out on letter or A4 sized paper. It is **very** important to not scale the document. Your pattern will print on multiple pages, which you will then tile together. Arrange the sheets on a large, hard and flat surface matching up the numbers and letters (i.e. 6A to 6A). Cut or fold one of the sides and match the edge to its corresponding side. Then, tape down in place so paper is secure.

Trace the pattern pieces from the pattern sheet following the lines and markings for style 111 and your size. Trace the pocket piece from piece 1 as a separate pattern piece – it is the same for all sizes.


burda style magazine patterns do not have seam allowance included.

Seam and hem allowance to be added:
Seams and edges 1.5 cm (5/8 in), hem 4 cm (1 5/8 ins).

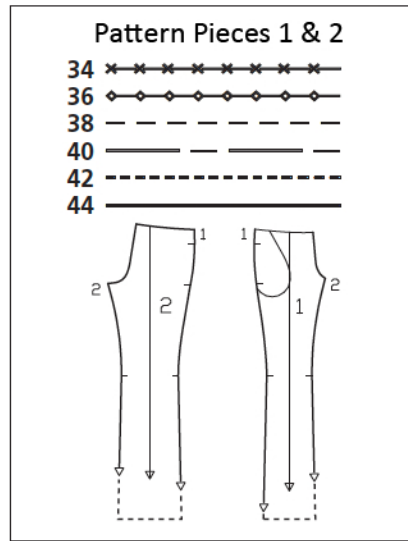

Jersey, 150cm


fabric fold

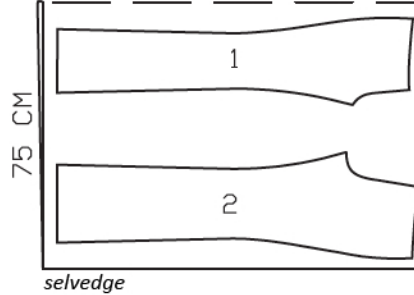

Right side faces in on a double layer of fabric; right side faces up on a single layer of fabric.

Satin, 140cm wide

selvedge

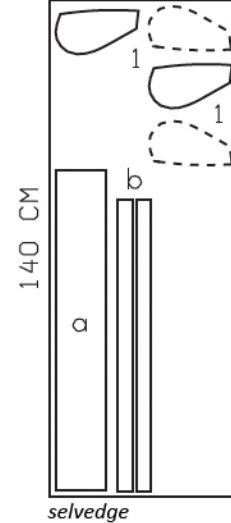

Cutting Out

Jersey:

- 1 front trouser piece 2x
- 2 back trouser piece 2x

Satin:

- 1 pocket piece 4x

Draft the following pieces NOT included in the pattern:

a) waistband, 86 – 90 – 94 – 98 – 102 – 106 cm (34 – 35 1/2 – 37 – 38 3/4 – 40 1/4 ins) long, 14 cm (5 1/2 ins) wide, finished width 7 cm (2 3/4 ins),

b) drawstring, a total of 160 – 165 – 170 – 175 – 175 – 180 cm (63 – 65 – 67 – 69 – 69 – 71 ins) long, 4 cm (1 5/8 ins) wide (incl. allowances).

Sewing

Stitch side seams, not stitching across pocket openings. Press seam allowances open.


Inseam pockets: Work from inside to pin pocket pieces to seam allowances of pocket opening edges, right sides together. Stitch in place directly along marked seam lines. Above and below pocket openings, stitch pocket pieces in place, close to seam. Press pocket pieces forward and stitch together. Baste upper pocket edges in place. At ends of pocket openings, stitch a few stitches horizontally.

Stitch inside leg seams, stretching trouser backs above seam marks.

Pull one trouser leg into the other, with right sides facing. Stitch centre front and back seam as continuous seam. Press seam allowances open from each upper edge to beginning of crotch curve. Do not press allowances flat along curve.

Stitch waistband ends together (= centre back seam). Press seam allowances open. Mark centre front opposite seam. Fold waistband in half lengthwise and press fold edge. Unfold waistband again. Use vanishing chalk to mark a casing, 2.5 cm (1 in) wide, on outer waistband half, 1.5 cm (5/8 in) below fold edge, beginning and ending 4.5 cm (1 7/8 ins) from centre front. At beginning and end of casing, work a vertical buttonhole slit for the drawstring, first basting pieces of interfaced fabric to wrong side, as reinforcement. Fold waistband in half again. Top-stitch waistband as marked, to form casing. Neaten lower waistband edges together.

Press seam allowance on upper edge of trousers to inside. Lay upper trousers edge on seam allowance of lower waistband edge and pin to centre front and back. Stitch upper trousers edge to waistband with a stretch stitch, stitching 7 mm (1/4 in) from edge and stretching trouser pieces.

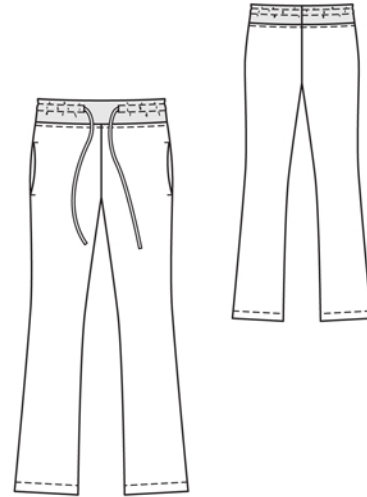

Turn ends of drawstring under. Fold drawstring lengthwise, right side facing in. Stitch 1 cm (3/8 in) from fold edge. Turn drawstring right side out. Stitch ends closed. Pull drawstring into casing.

Turn hem allowances to inside. Work from right side and use twin machine needle to stitch hem 3 cm (1 1/4 ins) from lower edge.