

Emily Variation 1

By: BurdaStyle

<http://www.burdastyle.com/projects/emily-variation-1>




Here is a fun variation of our classic Emily blouse. With wide bell sleeves and a sweet flat collar, this is a great addition to any wardrobe. The BS-021 Emily Variation 1 PDF pattern contains the collar, sleeve, and sleeve cuff variations. You will also need to download the original Emily pattern for the rest of the blouse pieces.

Materials

light woven cotton

Step 1

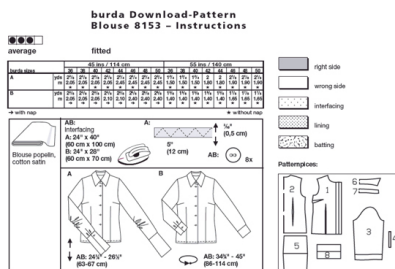

PLEASE NOTE YOU WILL NEED TO DOWNLOAD TWO PATTERNS TO MAKE THE EMILY VARIATION – YOU WILL NEED ORIGINAL EMILY BLOUSE PATTERN PDF AS WELL AS THE BS-021 EMILY VARIATION PATTERN PDF.

PATTERN PIECES (Emily 8153)

A B 1 front 2x

A B 2 back 1x

A B 3 sleeve 2x *NOT NEEDED

A B 4 vent facing 2x *NOT NEEDED
A 5 cuff 2x *NOT NEEDED
A B 6 collar 2x *NOT NEEDED
A B 7 collar band 2x *NOT NEEDED

PATTERN PIECES (BS-021 Emily variation)

Collar 2x
Cuff 2x
Sleeve 2x

Step 2




The patterns can be printed out at the copy shop. If you decide to print them at home, follow the instructions:

Paper cut for ANSI A (German DIN A4) prints:

The patterns are printed out with a thin frame. Wait until all sheets are printed out. Arrange the sheets so that they fit together (see additional page with the overview of the prints). Fold the single sheets on the upper and right edge along the thin frame lines. Begin with the left lower sheet and then tape the frame lines together precisely.

Step 3

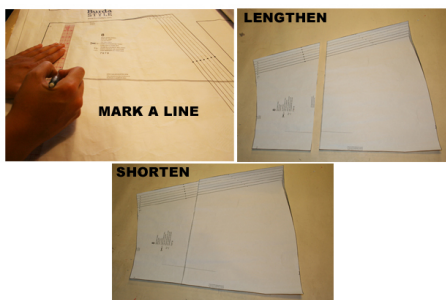

ADJUST PATTERN SIZES

Select your size according to the Burda-dimension table: dresses, blouses, jackets and coats according to the bust size, trousers and skirts according to the hip width. Change the pattern to fit your measurements if they deviate from the Burda-size chart. Cut out the pattern according to your size.

Refer to our [Adjust patterns for mixed sizes](#) technique

LENGTHENING OR SHORTENING THE PATTERN PIECES

Our pattern is calculated for a height of 5â– 6â– (168 cm). If you are taller or shorter, you can adjust the pattern pieces along the lines marked "lengthen or shorten here". This way the proper fit is maintained. Always adjust all pattern pieces along the same line to the same degree.

How to lengthen and shorten pattern pieces:

Cut the pattern pieces along the marked lines

To lengthen, slide the two halves of the pattern piece as far apart as necessary.


To shorten, overlap the two halves of the pattern piece as far as necessary. Blend the side edges.

A

Sizes 12 to 24 (38 to 50)

Mark the top buttonhole on piece 1 (AB) and piece 15 (D) the same distance from edge of neckline as for size 10 (36). The bottom buttonhole is in the same place for all sizes. Mark the other 3 buttonholes evenly in between. The buttonholes on pieces 1 and 15 must correspond exactly.

Step 4

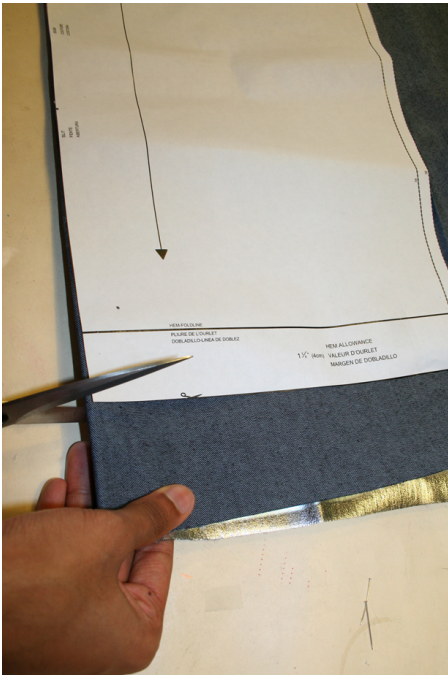


CUTTING OUT

FOLD (â– â– â– â–) means: Cut on the fold, the fold being the center of the pattern piece, but never a cut edge or seam. The piece should be cut double, with the fold line forming the center line. Pattern pieces that are outlined with a broken line in the cutting diagrams are to be placed face down on the fabric. The cutting diagrams on the pattern sheet show how the pattern pieces should be placed on the fabric.

The cutting diagrams show the placement of the pattern on the fabric.

For a single layer of fabric, the pattern pieces are pinned to the right side. For double layers of fabric, the right sides are facing and the pattern pieces are pinned to the wrong side. The pattern pieces that are shown extending over the fold of the fabric in the cutting diagram should be cut last from a single layer of fabric.

Step 6



BLOUSE

Darts

Stitch bust darts on front pieces and waist darts on front and back toward points of darts. Knot ends of thread at points of darts. Press bust darts down, press waist darts toward front and back center. (a)


Front Edges

Press self-facing on front to the inside first on the FOLD LINE and then on the FACING FOLD LINE, baste. (b)

Shoulder Seams

Lay front right sides together with back. Baste shoulder seams (seam number 1) and stitch, easing back shoulder edges. Trim seam allowances, neaten together and press onto back.

Step 7

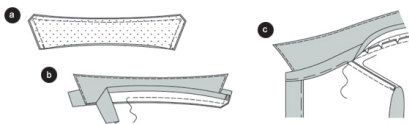

Collar *PLEASE NOTE IMAGES ARE FOR ORIGINAL EMILY PATTERN! FOR THE VARIATION, YOU WILL CONSTRUCT ACCORDING TO INSTRUCTIONS, WITHOUT A COLLAR BAND.

Lay collar pieces together. Baste and stitch edges together as illustrated. Trim seam allowances, trim corners diagonally. Turn collar. Baste edges, press and topstitch close to edges. Baste open edges together. (a)

THIS STEP AND IMAGE "B" IS NOT NEEDED FOR EMILY VARIATION (NO COLLAR BAND USED)


Press seam allowance at joining edge of non-interfaced collar band piece to the inside. Pin this collar band piece to the interfaced side of the collar, pin interfaced collar band piece to the other side of the collar. Baste collar band pieces together (seam number 2) and stitch, catching collar. Trim seam allowances, trim corners diagonally. Turn collar band, baste edges and press. (b)

Baste interfaced collar piece right sides together with edge of neckline (seam number 3). Stitch. Trim seam allowances, clip curves and press onto collar. Baste non-interfaced collar piece along joining seam. Work from the right side of the blouse to topstitch close to all edges of collar band, catching inside half at joining seam. ©

Side Seams

Lay fronts right sides together with back. Stitch side seams (seam number 4). Trim seam allowances, neaten together and press to one side.

Step 9

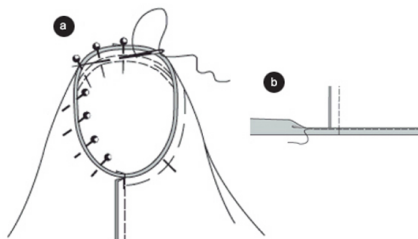

Setting in Sleeves

To ease sleeve caps, pull bobbin threads.

Pin sleeve into armhole, right sides facing. When setting in sleeves, 4 points are important for proper fit: (a)

_ Match markings 6 on sleeve and front. Match sleeve and side seams. Match marking at sleeve cap with shoulder seam. Distribute fullness evenly to avoid forming tucks. Baste and stitch sleeve from sleeve side. Trim seam allowances, neaten together and press toward sleeves.

Hem

Press hem to inside, turn in and baste. Stitch narrow hem. Work BUTTONHOLES in right fastening edge. Sew on BUTTONS along center front of left front. (b)

Step 5

SEAM AND HEMLINE ALLOWANCES are included on an average:

5/8" (1.5 cm) for all edges and stitches. Using BURDA copying paper, transfer the lines and signs of the pattern onto the wrong side of the fabric. Instructions can be found in the packaging.

Sewing

While sewing, the right sides of the fabric are facing.

Transfer all lines of the pattern onto the right side of the fabric using basting stitches.

INTERFACING

Cut interfacing for CUFF, COLLAR and PLACKET (Shirt front facing), then iron on the wrong side of the fabric pieces.

Step 8

Sleeves and cuffs

To ease sleeve caps, stitch two closely spaced lines of machine basting (longest stitch setting) from _ to _.

To gather the bottom sleeve edge, sew along the length of the edge with loose and wide stitches and be sure to leave a tail at both ends. Pull the bobbin thread so that it matches the length of the cuff's side edge. Tie thread. Distribute width evenly.

Baste cuff piece on lower edge of sleeve (seam number 7) and stitch. Press seam allowances onto cuff. Press seam allowance at other long edge to inside.

Fold cuff on fold line, right side in. Stitch across ends. Trim seam allowances, trim corners diagonally. Baste cuff to inside on fold line, baste along joining seam. Press. Work from the right fabric side of the sleeve to topstitch close to all edges of cuff, catching inside half at joining seam.

BurdaStyle

Emily Variation 1