


# 5/2010 Boys' trousers

By: burda style magazine

<http://www.burdastyle.com/projects/52010-boys-trousers>

---

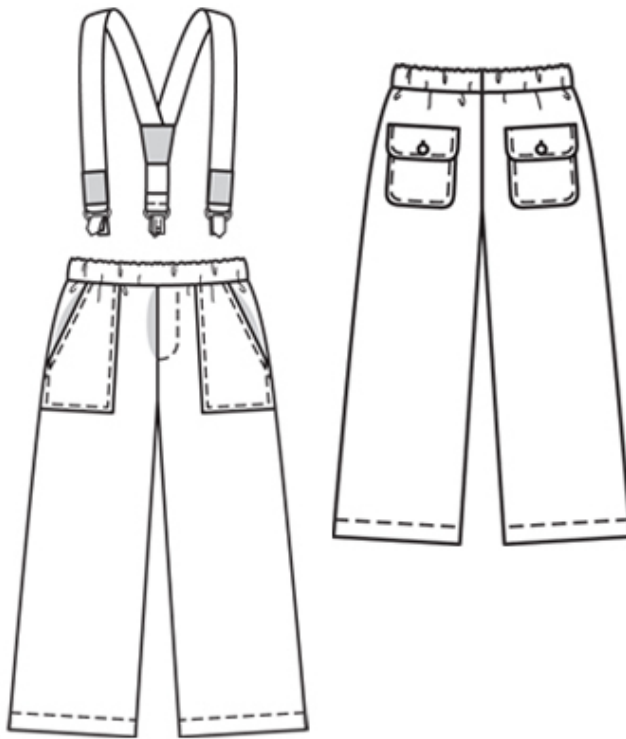


Boys' trousers burda style magazine patterns FAQ

## Materials

Linen

---

## Step 1 — Preparation

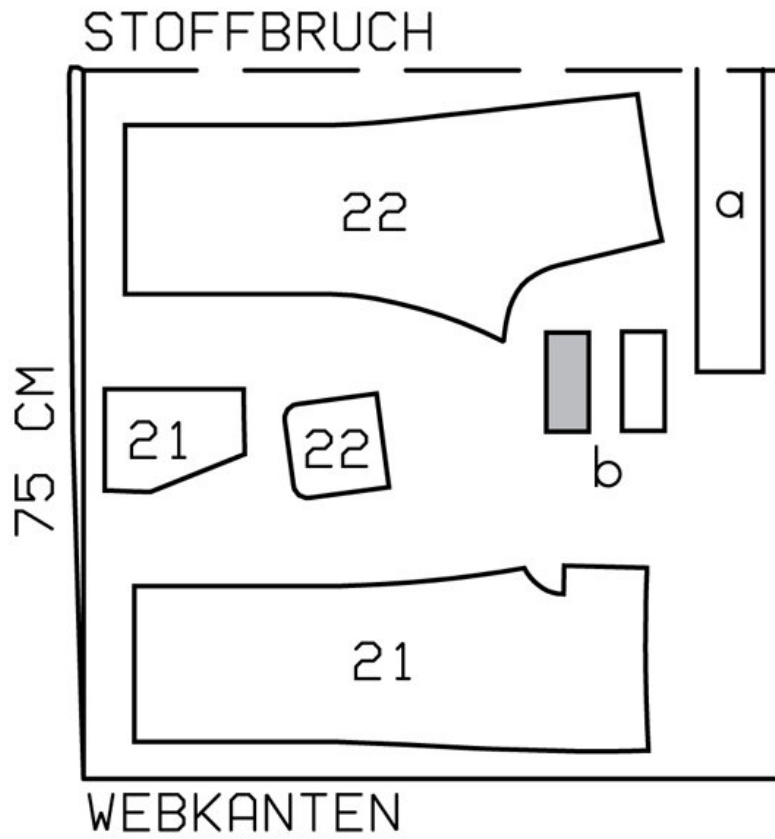

148 104-128


Trace the pattern pieces from the pattern sheet. Trace the pockets as separate pattern pieces.  
 The stitching line at the slit on piece 21 is marked for size 104. Remark the stitching line for sizes 110 & 128.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

---

## Step 2 — Cutting Out

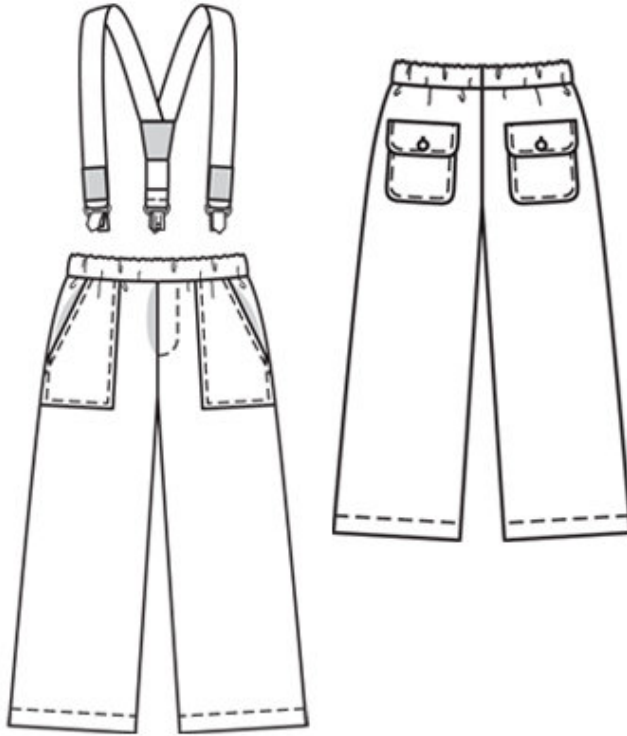

21âˆ—front trouser piece 2x

âˆ— front pocket 2x

22âˆ—back trouser piece 2x

âˆ— back pocket 2x

a) waistband, 64 âˆ— 65.5 âˆ— 67 âˆ— 70 âˆ— 73 cm (25<sup>1</sup>/<sub>4</sub> âˆ— 25<sup>7</sup>/<sub>8</sub> âˆ— 26<sup>1</sup>/<sub>2</sub> âˆ— 27<sup>3</sup>/<sub>4</sub> âˆ— 28<sup>3</sup>/<sub>4</sub> ins) long, 7 cm (3 ins) wide, finished width 3.5 cm (1<sup>1</sup>/<sub>2</sub> ins),

b) 4 flap pieces (back pockets), 10.5 âˆ— 11 âˆ— 11.5 âˆ— 12 âˆ— 12.5 cm (4<sup>1</sup>/<sub>4</sub> âˆ— 4<sup>3</sup>/<sub>8</sub> âˆ— 4<sup>1</sup>/<sub>2</sub> âˆ— 4<sup>3</sup>/<sub>4</sub> âˆ— 5 ins) long, 4.5 cm (1<sup>7</sup>/<sub>8</sub> ins) wide.

Interfacing: Iron onto outer flap pieces.

---

### Step 3 — Stretch seam edges

Lay back trouser pieces right sides facing. Stretch inside leg edges with a steam iron or press under a damp cloth until the edges match corresponding edge on front trouser piece.

---

### Step 4 — Stitch side seams

Stitch side seams.

---

## Step 5 — Front pockets

Press allowances on slanted pocket opening edges to inside, turn under and baste. Topstitch close to pocket opening edges and again 7 mm (1/4 in) wide. Press allowances on front, lower and side edges to inside. Pin pockets to front trouser pieces. Edgestitch in place and stitch again 7 mm (1/4 in) wide. Baste upper edges of pockets in place.

---

## Step 6 — Patch pockets and flaps

Turn in allowance on upper edges of pockets and stitch. Press allowances on side and lower edges to inside. Pin pockets to fronts at abutting line. Stitch edges of pockets in place, 7 mm (1/4 in) -from edges. Stitch each interfaced flap piece to flap piece with no interfacing, right sides together, leaving joining edge open. Turn right side out. Topstitch 7 mm (1/4 in) from edges. Work one buttonhole for smaller button in each flap. Stitch flaps to fronts, 1 cm (3/8 in) above pockets. Press flaps down and stitch again 5 mm (3/16 in) from joining seam.

Round off bottom corners of flaps when facing them. Topstitch pockets and flaps close to edges and 7 mm (1/4 in) wide. Stitch pockets and flaps to back trouser pieces.

---

## Step 7 — Stitch side seams, inside leg seams, and centre front and back seams

Stitch inside leg seams. Stitch centre front seam, below slit mark, and centre back seam as continuous seam. Baste opening closed above centre seam. Press facings onto left trouser piece. Topstitch left trouser piece as marked, catching facings. Undo basting at slit.

---

## Step 8 — Waistband

Pin ends of waistband right sides together. Stitch seam on outer waistband half, leaving seam open on inside for elastic. Press seam allowances open. Stitch waistband to upper edge of shorts. Press seam allowances onto waistband. Fold waistband half to inside, turn in inside edge and baste. Topstitch waistband close to joining seam. Insert elastic. Sew ends of elastic together for a circumference of 54 â€ 55 â€ 56 â€ 58 â€ 60 cm (211/4 â€ 213/4 â€ 221/4 â€ 23 â€ 233/4 ins).

---

## Step 9 — Hems

Press hems to inside, turn in to a width of 2 cm (3/4 in) and stitch.

---

**BurdaStyle**

5/2010 Boys' trousers