

4/2010 Girls' Skirt

By: burda style magazine


<http://www.burdastyle.com/projects/42010-girls-skirt>

Girls' Skirt burda style magazine patterns FAQ

Materials

Canvas


Step 1 — Preparation

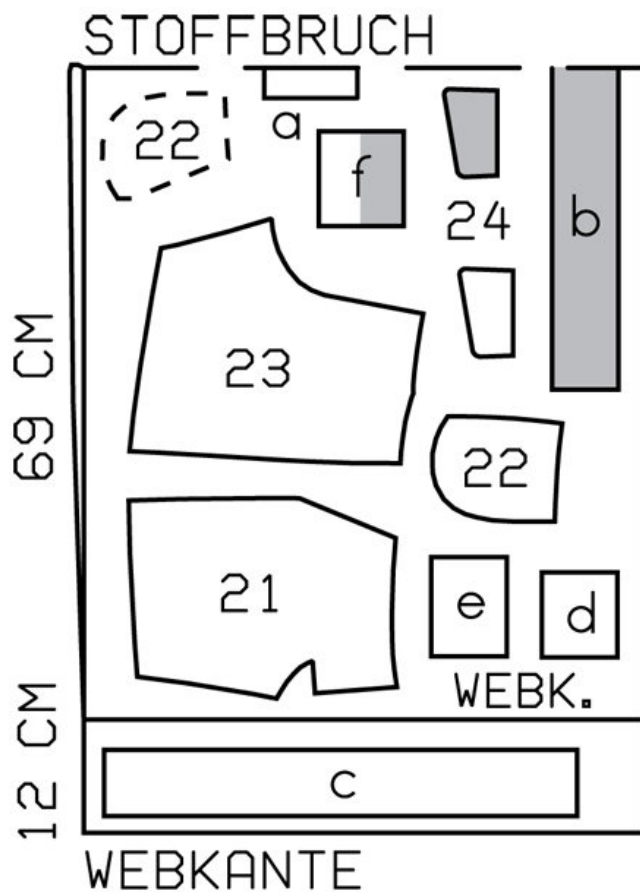

132 98-122

Trace pattern pieces from pattern sheet. Trace the pocket piece from piece 22 as a separate pattern piece. The stitching lines at the zip opening on piece 21 are marked for size 98. For sizes 104 â 122, remark the stitching lines to fit length of opening. The upper pocket abutting line on -piece 21 is marked for size 98. Remark the line for the other sizes the same distance from opening edge of hip yoke pockets as for size 98. Seam and hem allowances:
Seams and edges 1.5 cm (5/8 in), hem 3 cm (1 1/4 ins).

Step 2 — Cutting Out

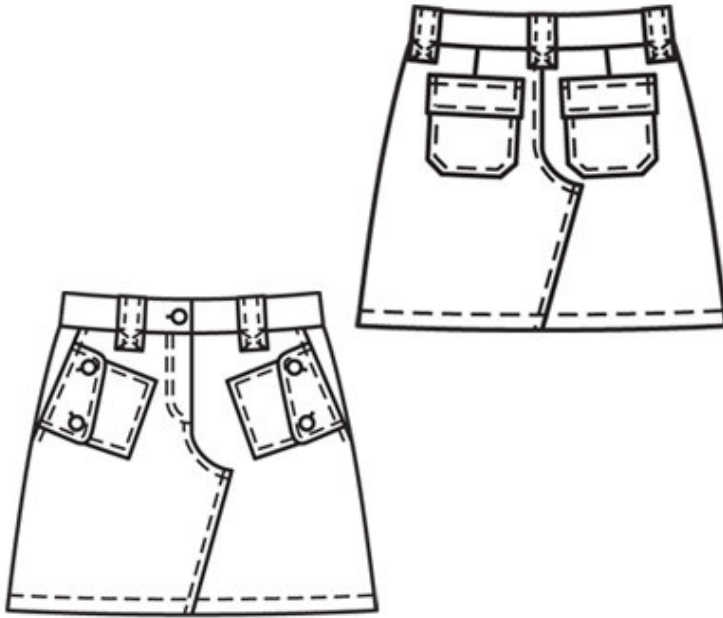

21âˆ–front skirt panel 2x

22âˆ–side hip yoke mit

âˆ– âˆ–âˆ–âˆ–integrated pocket piece 2x

âˆ– âˆ– âˆ–pocket piece 2x

23âˆ–back skirt panel 2x

24âˆ–front flap 4x

a) left underlap piece, 8 âˆ– 8.5 âˆ– 8.5 âˆ– 9 âˆ– 9 cm (31/4 âˆ– 33/8 âˆ– 33/8 âˆ– 31/2 âˆ– 31/2 ins) long, 6 cm (21/2 ins) wide, finished width 3 cm (11/4 ins),

b) waistband with 3.5 cm (11/2 in) underlap, 62 âˆ– 63 âˆ– 64 âˆ– 65 âˆ– 67.5 cm (241/2 âˆ– 243/4 âˆ– 251/4 âˆ– 253/4 âˆ– 265/8 ins) long, 7 cm (3 ins) wide, finished width 3.5 cm (11/2 ins),

c) 5 belt carriers, a total of 50 cm (20 ins) long, 7 cm (3 ins) wide (incl. allowance),

d) 2 front pockets, 8 cm (31/4 ins) long, 9 cm (31/2 ins) wide,

e) 2 back pockets, 8.5 âˆ– 8.5 âˆ– 9 âˆ– 9 âˆ– 9.5 cm (33/8 âˆ– 33/8 âˆ– 31/2 âˆ– 31/2 âˆ– 33/4 ins) long, 9.5 âˆ– 9.5 âˆ– 10 âˆ– 10 âˆ– 10.5 cm (33/4 âˆ– 33/4 âˆ– 4 âˆ– 4 âˆ– 41/4 ins) wide,

f) 2 back flaps, 10 âˆ– 10 âˆ– 10.5 âˆ– 10.5 âˆ– 11 cm (4 âˆ– 4 âˆ– 41/4 âˆ– 41/4 âˆ– 43/8 ins) long, 8 cm (31/4 ins) wide, finished width 4 cm (15/8 ins).

Interfacing: See pattern layout.

Step 3 — Back darts

Stitch back darts. Press to centre.

Step 4 — Front pockets and flaps

Press allowance on opening edges of front pockets to inside, turn in and stitch. Press remaining pocket allowances to inside. Edgestitch pockets onto front trouser pieces at placement lines and stitch again 7 mm (1/4 in) from edges. Opening edges of pockets point toward opening edges of front trousers (hip yoke pockets). For each flap, stitch 2 pieces together, right sides facing, leaving joining edge open. Turn right side out. Topstitch close to edges and again 7 mm (1/4 in) from edges. Work buttonholes in flaps. Lay flaps over front -pockets and baste to opening edges of hip yoke pockets.

Step 5 — Hip yoke pockets

Stitch pocket pieces to pocket opening edges of front skirt panel. Lay pocket pieces up and stitch to seam allowances, close to seam. Turn pocket pieces to inside. Pin pocket opening edges to side hip yokes at placement lines. Stitch inside edges of pocket pieces together. Baste pocket pieces to wrong side of front skirt panel. Topstitch 5 mm (3/16 in) from pocket opening edges, catching flaps.

Step 6 — Back pockets and flaps

Press allowances on upper edges of pockets to inside, turn in, and stitch. Press allowances on side and lower edges to inside. Fold bottom corners of pockets diagonally under, press, and trim to 1 cm (3/8 in) wide. Pin pockets to back trouser pieces at placement lines and stitch in place. Fold each flap lengthwise, right side in. Stitch across ends. Turn right side out. Topstitch edges. Stitch flaps in place, 1.5 cm (5/8 in) above pockets. Press flaps down and topstitch close to joining -seams.

Step 7 — Self-facings

Press self-facing at opening edge of right front skirt panel in on fold line and press seam allowance to inside on lower edge of skirt panel. Topstitch close to right edge of opening. Lay right front skirt panel on left front panel, with wrong side facing right side, matching centres. Below slit mark, stitch close to pressed edge and 7 mm (1/4 in) from pressed edge.

Step 8 — Back skirt panels

Press seam allowance of centre seam edge on left back skirt panel to inside, from upper edge to hem. Lay left back skirt panel on right back panel, with wrong side facing right side. Edgestitch pressed edge in place and stitch again 7 mm (1/4 in) from edge.

Step 9 — Zip opening

Press self-facings on edges of openings to inside. Stitch on the right along centre front and stitch on the left 5 mm (3/16 in) before centre front. Stitch zip under left edge of opening (underlap), stitching close to teeth of zip. Pin opening closed, matching centres. Pin free zip tape to right facing, not catching skirt panel. Baste facing in place. Topstitch opening from upper edge to 3 cm (1 1/4 ins) before end, as marked. Fold underlap piece lengthwise, right side facing in. Stitch across bottom end. Turn right side out. Lay underlap under left edge of opening and pin to facing. Stitch facing to underlap, close to zip joining seam. Lay opening closed again and top-stitch to the end, catch-ng underlap.

Step 10 — Stitch side seams

Stitch side seams. Press allowances onto back. Topstitch close to seams.

Step 11 — Belt carriers

Fold strip for belt carriers lengthwise, right side in. Stitch 2.5 cm (1 in) from fold edge. Turn right side out. Topstitch 7 mm (1/4 in) from long edges. Cut strip into 5 pieces. Baste belt carriers to upper edge of trousers, next to pocket openings in front and 1 cm (3/8 in) from side seams and over centre back seam in back.

Step 12 — Waistband

Stitch waistband to upper edge of trousers, stitching waistband underlap to underlap of opening. Press seam allowances onto waistband. Fold waistband in half lengthwise, right side facing in. Lay allowance on inside edge of waistband up at the ends. Stitch across ends of waistband. Turn waistband right side out. Work a 2 cm (3/4 in) long vertical buttonhole on inside half of waistband, 4 cm (15/8 ins) in front of each side seam, to insert elastic. Turn in inside edge of waistband and baste in place. Topstitch waistband close to all edges. Insert buttonhole elastic through openings in waistband. Fasten ends of elastic on inside of waistband with one flat button each. Work a buttonhole in right end of waistband.

Step 13 — Finish belt carriers

Stitch across belt carriers, 2 cm (3/4 in) below waistband joining seam. Lay belt carriers up. Stitch a square and crisscross on each belt carrier, below waistband joining seam. Turn in top ends of belt carriers and stitch to upper edge of waistband.

BurdaStyle

4/2010 Girls' Skirt