

08/2010 Bubble Skirt

By: burda style magazine

<http://www.burdastyle.com/projects/082010-bubble-skirt>

Bubble Skirt burda style magazine patterns FAQ

Materials

duchesse


Step 1 — Preparation

Trace the pattern pieces from the pattern sheet. Trace the pocket piece from piece 23 as a separate pattern piece — it is the same for all sizes.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 2 cm (3/4 in).

Step 2 — Cutting out

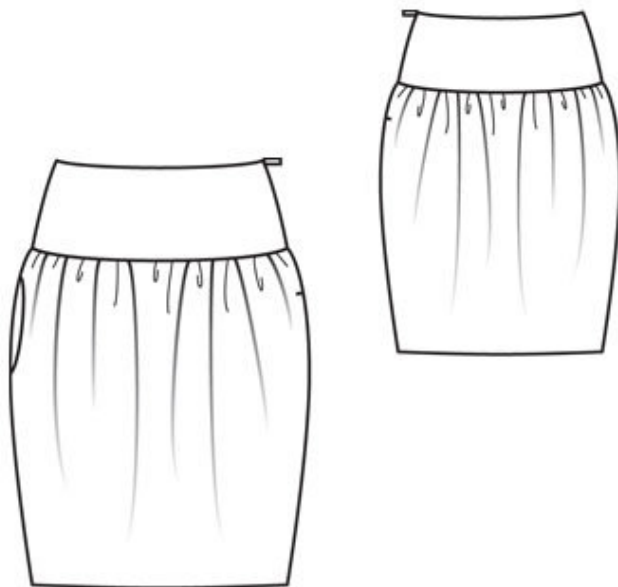

Duchesse:

21 front yoke, on a fold 2x

22 back yoke, on a fold 2x

23 skirt panel, on a fold 2x

â— pocket piece 1x

Lining: pocket piece (piece 23).

Interfacing: See pattern layout.

Step 3 — Skirt panels

Stitch right side seam, but do not stitch across pocket opening, between markings. Gather upper edges of skirt panels.

Step 4 — In-seam pocket

Pin pocket pieces right sides together with seam allowances of pocket opening edge â— pocket lining piece in front and fabric pocket piece in back. Stitch pocket pieces in place along marked seam lines and stitch pocket pieces close to seam, above pocket opening. Press pocket pieces forward and stitch together. Baste upper edge of pocket to skirt.

Step 5 — Yoke

Stitch right side seams of yokes, stitching seam of inside yoke as mirror image of outer yoke. Stitch outer yoke to upper edge of skirt. Press seam allowances onto yoke

Step 6 — Zip

Sew invisible zip to left opening edges. Stitch left side seam from lower edge to zip.

Step 7 — Face upper edge of skirt

Lay inside yoke right sides together with outer yoke. Pin to upper edge of yoke. At edge of zip opening, turn yoke back, about 5 mm (3/16 in) before edge, and pin to upper edge. Lay allowances on opening edges of skirt outward and pin to upper edge, over yoke. Stitch along upper edge of yoke. Turn allowances on opening edges of skirt to inside. Lay inside yoke up and stitch to seam allowances, as far as possible, close to seam. Turn inside yoke to inside, lay flat over join-ing seam, and baste. Stitch from right side of garment along line of seam. Sew yoke to zip tapes.

Step 8 — Hem allowance

Press hem allowance to inside and sew in place by hand.

BurdaStyle

08/2010 Bubble Skirt