

burda style magazine 01/2010 Suit Trousers

By: burda style magazine


<http://www.burdastyle.com/projects/burda-style-magazine-012010-9>

Chic Suit Trousers For more information on this and other burda style magazine patterns, please see this dedicated blog post.

Materials

wide woollen glen chec

Step 1 — Preparation

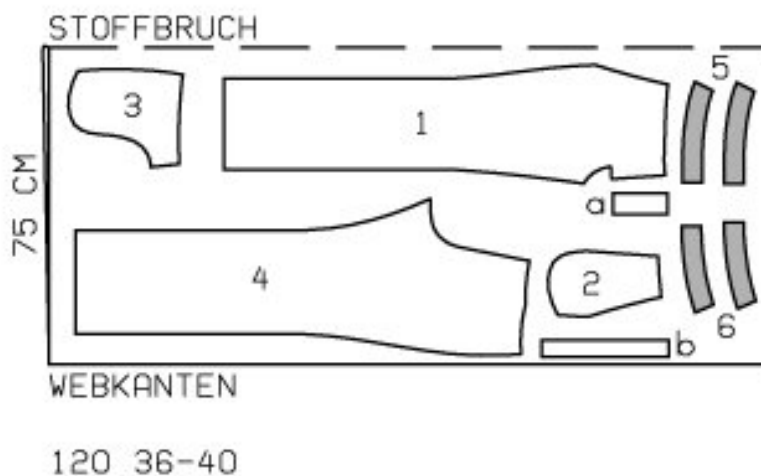


Trace the pattern pieces from the pattern sheet. Lengthen piece 4 as indicated.

The stitching line at the zip opening is marked for size 36. For sizes 38 — 44, remark the \hat{A} -stitching line the same distance from centre front as for size 36.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

Step 2 — Cutting out

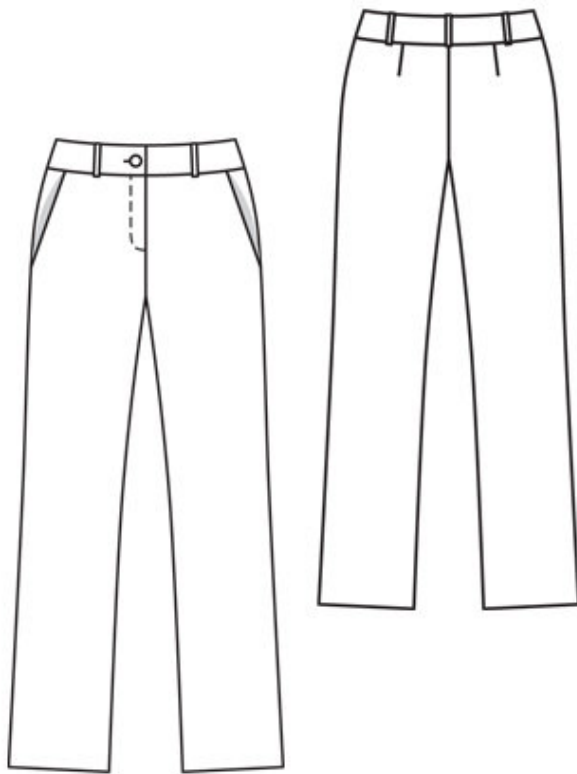

- 1 front trouser piece 2x
- 2 pocket piece 2x
- 3 side hip yoke with
- â— integrated pocket piece 2x
- 4 back trouser piece 2x
- 5 front waistband 4x
- 6 back waistband 4x

- a) left underlap, 13 cm (5 1/4 ins) long, 5 cm (2 ins) wide, finished width 2.5 cm (1 in),
- b) 5 belt carriers, a total of 45 cm (18 ins) long, 4 cm (1 5/8 ins) wide (incl. allowances).

Interfacing: Iron onto waistband pieces. Iron Vilene Bias Tape to pocket opening edge of front trouser pieces.

Step 3 — Hip yoke pocket

Stitch pocket pieces right sides together with pocket opening edges of front trouser pieces. Lay pocket pieces up and stitch to seam allowances, close to seam. Turn pocket pieces to inside. Pin pocket opening edges to side hip yokes at placement lines. Stitch pocket pieces together on inside. Baste pocket pieces to wrong side of front trouser pieces, first trimming away allowance of right pocket piece at centre front.

Step 4 — Back darts, side and center seams

Stitch back darts and press toward centre. Stitch side seams and inside leg seams. Press seam allowances open. Stitch centre front seam from slit mark to inside leg seam.

Step 5 — Zip opening

Press self-facings at opening edges to inside. Stitch along centre front on the right and 5 mm (3/16 in) before centre front on the left. Stitch zip under left edge of opening (underlap), stitching close to teeth of zip. Pin opening closed, matching centres. Pin loose zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch opening from the top to 3 cm (1 1/4 ins) before end, as marked. Fold underlap piece lengthwise and stitch across bottom end. Turn right side out. Lay underlap under left edge of opening and pin to facing. Stitch facing to underlap, close to zip joining seam. Lay opening closed again and top stitch to the end, catching underlap.

Step 6 — Belt carriers

Fold strip for belt carriers lengthwise, right side facing in. Stitch 1 cm (3/8 in) from fold edge. Turn right side out. Topstitch close to edge and cut into 5 pieces. Baste belt carriers to upper edge of trousers, placing one each in centre of front trouser pieces and 6 cm (2 3/8 ins) from side seams in back.

Step 7 — Waistband and centre back seam

Sew remaining belt carrier in place over centre back seam. Work buttonhole in right end of waistband.

Step 8 — Hem allowances

Press hem allowances to inside and sew in place by hand.

BurdaStyle

burda style magazine 01/2010 Suit Trousers