

# 4/2010 Mens' trousers

By: burda style magazine

<http://www.burdastyle.com/projects/42010-mens-trousers>

---


Mens' trousers burda style magazine patterns FAQ

## Materials

Cotton twill

---

## Step 1 — Preparation

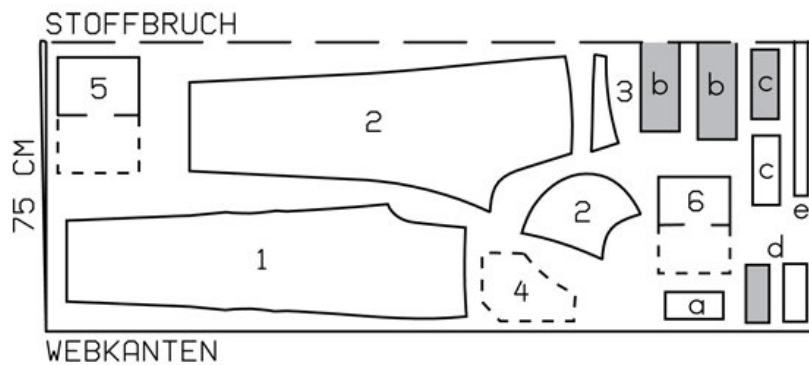

129 48-52

Trace the pattern pieces from the pattern sheet. Lengthen pieces 1 and 2 as indicated. Trace patch from piece 2 as a separate pattern piece.

The stitching line at the zip fly is marked for size 48. Mark the stitching line for sizes 50 and 56 the same distance from centre front as for size 48, noting length of opening.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

---

## Step 2 — Cutting Out



- 1 front trouser piece 2x
- 2 back trouser piece 2x
- â back patch 2x
- 3 back yoke 2x
- 4 front pocket 2x
- 5 side pocket, on a fold 2x
- 6 back pocket, on a fold 2x

A) facing for left opening edge, 15 cm (6 ins) long, 3.5 cm (1 1/2 ins) wide,

DRAFT YOURSELF: A) Right FLY piece, 15 cm (6") long, 7 cm (2 3/4") wide, finished width 3.5 cm (1 3/8")

DRAFT YOURSELF: B) Left waistband, 45.5 (Size 48) â 47.5 (Size 50) â 49.5 (Size 52) â 51.5 (Size 54) â 54.5 (Size 56) cm (18" â 18 3/8" (Size 50) â 19 1/2" â 20 3/8" â 21 1/2") long

DRAFT YOURSELF: Right waistband with 4 cm (1 5/8 in) flap for fly, 49.5 â 51.5 â 53.5 â 55.5 â 58.5 cm (19 1/2" â 20 3/8" â 21 1/8" â 22" â 23 1/8") long, each 10 cm (4") wide, finished width 5 cm (2")

C) 4 flap pieces (side pockets), 18 cm (7 ins) long, 7 cm (2 3/4 ins) wide,

D) 4 flap pieces (back pockets), 15 cm (6 ins) long, 6 cm (2 3/8 ins) wide,

E) 8 belt carriers, a total of 80 cm (31 1/2 ins) long, 3.5 cm (13/8 ins) wide -(incl. allowances).

Interfacing: See pattern layout.

---

### **Step 3 — Front pockets**

Press allowance on slanted pocket opening edges to inside, turn in, and baste. Topstitch close to pocket opening edges and again 7 mm (1/4 in) from edges. Press allowances on front and lower edges of pockets to inside. Stitch pockets to front trouser pieces, at placement lines. Baste upper and side edges in place.

---

### **Step 4 — Darts**

Stitch darts. Press upper darts up and lower darts down. Topstitch close to dart seams.

---

### **Step 5 — Back patches**

Press allowance on rounded edge of each back patch to inside. Baste back patches to back trouser pieces. Topstitch close to pressed edges and again, 7 mm (1/4 in) from pressed edges.

---

### **Step 6 — Stretch seam edges**

Lay back trouser pieces right sides facing. Stretch inside leg edges above marking by steam pressing or pressing under a damp cloth until they match corresponding edges on front trouser pieces.

---

### **Step 7 — Yokes**

Stitch back yokes to back trouser pieces and topstitch

---

### **Step 8 — Side seams**

Stitch side seams. Press seam allowances onto back. Topstitch back trouser pieces close to side seams, from upper edge, 35 cm (13 3/4 ins) long. Topstitch again 7 mm (1/4 in) from side seams.

---

### **Step 9 — Pockets and flaps**

Lay pleats in arrow direction and press. Baste to upper and lower edges of pockets. Stitch close to pleat folds on self-facings. Lay self-facing on upper edge of each -pocket to inside and stitch 3 cm (1 1/4 ins) from fold edge. Press allowances on side and lower edges of pocket to inside. Pin pockets to trouser pieces, at placement lines. Mark placement of top halves of snaps on bottom corners of interfaced flap pieces, 2 cm (3/4 in) each from lower and side edges. Attach top halves of snaps so that tops of snaps lie on inside of flap. Stitch each interfaced flap piece to flap piece with no interfacing, right sides together, leaving joining edge open. Turn right side out. Topstitch close to edges. Stitch flaps in place, 2 cm (3/4 in) above pockets. Press flaps down. Stitch again close to joining seams and 1.5 cm (5/8 in) from seams. Mark placement of bottom halves of snaps. Attach bottom halves of snaps. Edgestitch pockets in place.

---

## Step 10 — Inside leg seams

Stitch inside leg seams. Press seam allowances open. Stitch centre front from slit mark to inside leg seam.

---

## Step 11 — Zip opening

Stitch left facing piece right sides together with left edge of opening. Turn facing to inside and press edge. Topstitch 7 mm (1/4 in) from left edge of opening. Press allowance on right edge of opening (underlap) to inside, 5 mm (3/16 in) before centre front. Stitch zip under edge, close to teeth of zip. Pin opening closed, matching centres. Stitch free zip tape to left facing, not catching trouser piece. Baste facing in place. Topstitch opening from upper edge to 3 cm (1 1/4 ins) before end of opening as marked. Fold underlap piece lengthwise and stitch across bottom end. Turn right side out. Lay underlap under right edge of opening and pin to allowance of opening edge. Stitch allowance of opening edge to underlap, close to zip joining seam. Close zip. Topstitch to end of zip, catching underlap.

---

## Step 12 — Stitch centre back seam

Stitch centre back seam. Topstitch left half of trousers close to centre seam and 7 mm (1/4 in) from seam.

---

## Step 13 — Belt carriers

Neaten lengthwise edges of strip for belt carriers and press 1 cm (3/8 in) wide to inside. Topstitch strip close to edges and cut into 8 equal pieces. Baste pairs of belt carriers to upper edge of trousers, centred over front pockets and over centre back seam. Baste single belt carriers to upper edge of trousers back, 4 cm (15/8 ins) from each side seam.

---

## Step 14 — Waistband

Stitch centre back seam of waistband. Stitch waistband to upper edge of trousers, stitching waistband underlap to underlap of opening edge. Press seam allowances onto waistband. Fold waistband in half lengthwise, right side facing in. Lay allowance on inside edge of waistband up at ends. Stitch ends of waistband closed. Turn waistband right side out. Turn in inside edge of waistband at the ends, about 5 cm (2 ins) long, and baste, then lay edge flat over joining seam without turning in. Topstitch waistband close to edges. Work a buttonhole in left end of waistband.

---

## Step 15 — Stitchnng belt carriers to waistband

Lay belt carriers up, turn ends in and stitch to upper edge of waistband. Stitch across belt carriers 2 cm (3/4 in) below waistband joining -seam.

---

**BurdaStyle**

4/2010 Mens' trousers