

## 12/2011 Wool pants

By: burda style magazine

<http://www.burdastyle.com/projects/122011-wool-pants>

---



Wool pants burda style magazine patterns FAQ

## Materials

Wool

---

### Step 1 — Preparation



Paper cut for ANSI A (German DIN A4) prints:


This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).

**burda style magazine pattern do not have seam allowance included.**

Seam and hem allowances to be added: Seams and edges 1.5 cm (5/8 in).

---

### Step 2 — Cutting out

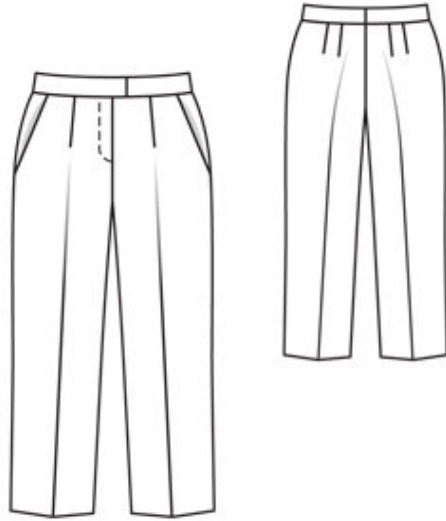

Wool crpe/houndstooth check:

21 front trouser piece 2x

23 side hip yoke with

integrated pocket piece 2x

24 back trouser piece 2x

26 front waistband 4x

27 back waistband 4x

a) left underlap piece, 13 — 13 — 13 — 15 — 15 cm (5 1/4 — 5 1/4 — 5 1/4 — 6 — 6 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins).

Lining piece:

23 pocket piece 2x

Interfacing: Iron to wrong side of waistband pieces.

---

### Step 3 — Creases

First press creases to only approx. 10 cm (4 ins) above hem line.

---

### Step 4 — Darts

Stitch darts in front and back trouser pieces. Press darts toward centre.

---

## Step 5 — Front

Fold front trouser pieces lengthwise, with wrong side facing in, and press creases, at lower edge pressing only as far as the marked abutting line for the time being.

---

## Step 6 — Hip yoke pockets

Stitch pocket pieces right sides together with pocket opening edges of trouser fronts. Turn pocket pieces up and stitch to seam allowances, close to seam. Turn pocket pieces to inside. Pin pocket opening edges to side hip yokes, at abutting lines. Stitch edges of pocket pieces together. Baste pocket pieces to wrong side of trouser fronts, first trimming away allowance of right pocket piece along centre front.

---

## Step 7 — Side seams

Stitch side seams and inside leg seams. Press seam allowances open. Press creases in back trouser pieces, at lower edge pressing only as far as the marked abutting line for the time being. Stitch centre front seam from slit mark to inside leg seam.

---

## Step 8 — Zip slit

Press self-facings on slit edges to inside, along centre front on the right and 5 mm (3/16 in) before centre front on the left. Stitch zip under left slit edge (underlap), stitching close to teeth of zip. Pin slit closed, matching centre fronts. Stitch loose zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch slit from upper edge to 3 cm (1 1/4 ins) before end, as marked. Fold underlap piece lengthwise, right side facing in. Stitch across bottom end. Turn right side out. Lay underlap under left edge of slit and pin to facing. Stitch facing to underlap, close to zip joining seam. Lay slit closed again and topstitch to the end, catching underlap.

---

## Step 9 — Waistband and centre back seam

Stitch side seams on waistband units. Stitch outer waistband unit to upper edge of trousers, leaving right end of waistband extending at centre front and stitching left end of waistband to slit underlap. Press seam allowances of joining seams onto waistband. Lay inside waistband unit right sides together with attached waistband and stitch upper edges together. Turn inside waistband up. Press seam allowances open. Stitch centre back seam. Press seam allowances open, from upper edge to beginning of curve. Do not press seam allowances flat along curve. Attach trouser hook to inside waistband, 1 cm (3/8 in) from right end. Lay inside waistband right sides together with outside waistband again and pin edges together. On left front end of waistband, turn allowance of inner edge up. At lower edge of overlap, turn seam allowances down again. Stitch along lower edge of overlap and front end of waistband. Trim seam allowances, trimming corners diagonally. Turn waistband right side out. Turn inside waistband edge under, approx. 5 cm (2 ins) long, and baste, then lay remaining edge flat over joining seam. Work from right side of garment to stitch along joining seam, catching inside waistband edge. Attach bar of fastener to waistband, to match hook. On left end of waistband, work a buttonhole for the inside button.

---

## Step 10 — Hem

Press hem allowances to inside and sew in place by hand

---

## Step 11 — Press creases

Press creases in hem edges.

---

**BurdaStyle**

12/2011 Wool pants