

# Lace Leggings 06/2012

By: burda style magazine

<http://www.burdastyle.com/projects/lace-leggings-062012>


---



These comfy leggings are made in a stretch lace, which make for a perfect pairing under a tunic top.

---

## Step 1 — Preparations

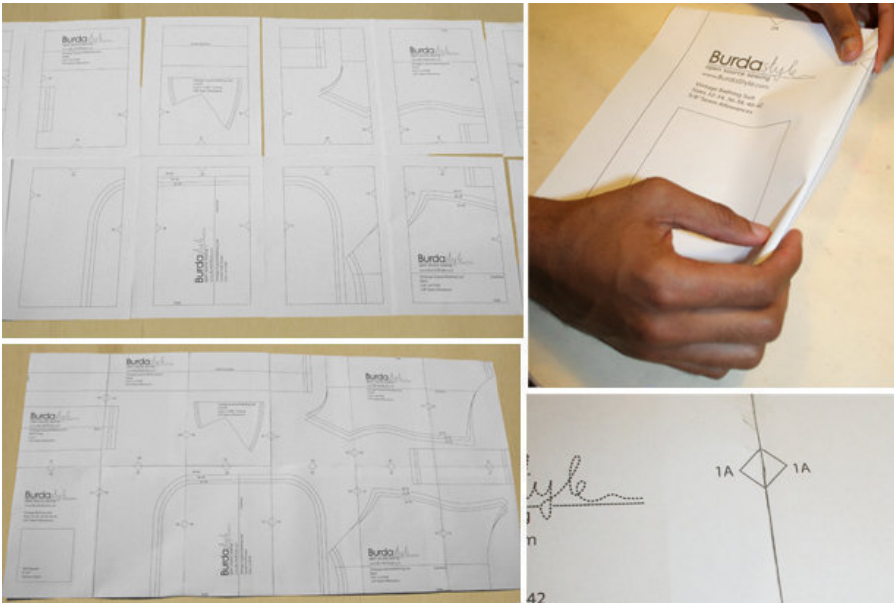

This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).

Trace the pattern pieces from the pattern sheet according to your size.

**burda style magazine pattern do not have seam allowance included.**



Seam and hem allowances to be added:

Seams and edges 1.5 cm (5/8 in), hem 2.5 cm (1 in).


---

## Step 2 — Cutting Out

Pattern Piece 1



Lay the pattern piece on a double layer of fabric  
Fabric width = 135cm

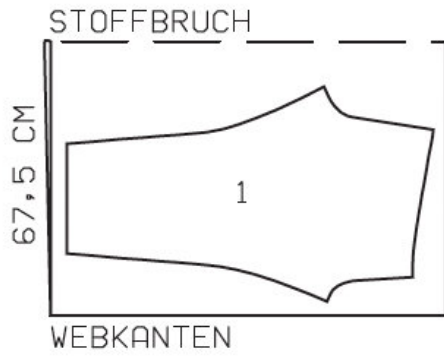


Stoffbruch = fabric fold  
Webkanten = selvage

1 legging piece 2x

---

### Step 3 — Sewing

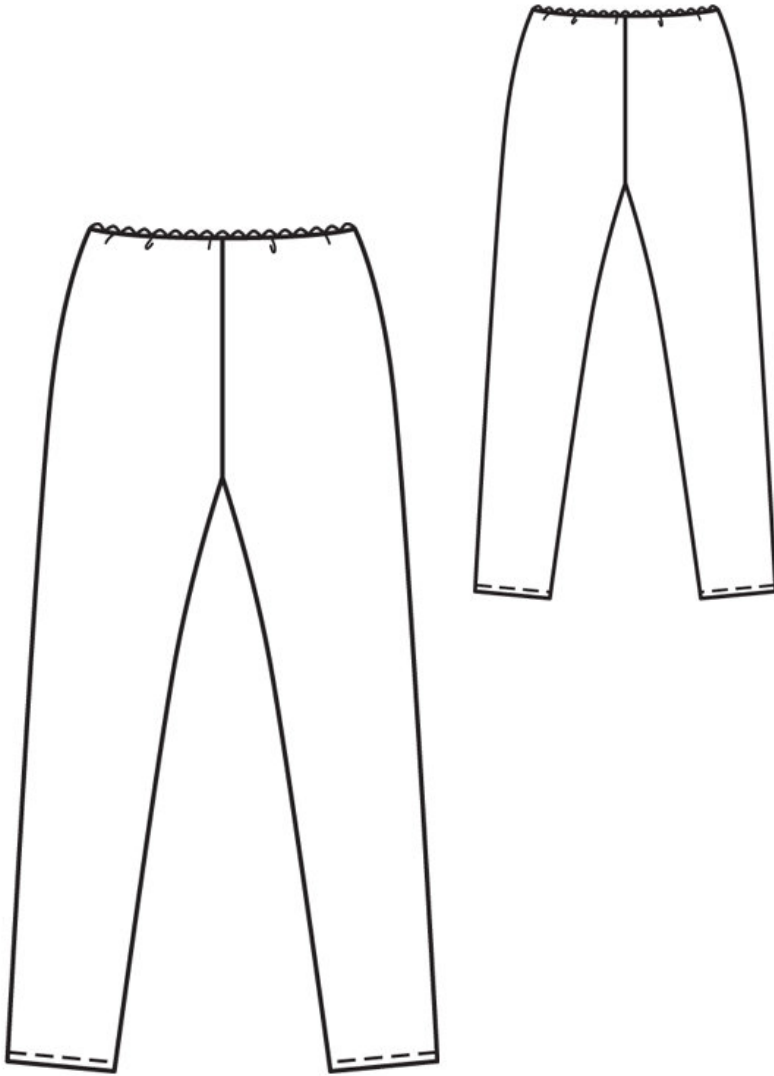

Note: Stitch seams on stretch fabrics with a special stretch stitch or at a narrow zigzag setting. Stitch hems with a twin machine needle to keep them elastic.

Lay legging pieces right sides together. Stitch centre front and centre back curved crotch seams.

Trim seam allowances to 7 mm (1/4 in) wide, neaten together and press to one side.

Fold each leg right side facing in and stitch inseams as a continuous seam, matching up crotch points. Trim seam allowances, neaten together, and press onto back.

Stitch ends of lace trim together to a circumference of: 60 64 68 72 76 80 cm  
(23 3/4 25 1/4 26 3/4 28 3/4 30 31 1/2 ins).

Spread seam allowances flat open and stitch in place. Mark the centre opposite the seam. Lay lace trim on upper edge of leggings, right sides facing, so that straight edge of trim lies on seam allowance and scalloped edge lies on the garment piece. Pin seam of trim to centre back seam and pin marked centre to centre front seam. Stretch trim to fit and stitch to upper edge of leggings. Turn trim up, turn seam allowance down, and press.

Work from right side of garment to stitch along line of centre front and centre back seams, catching the trim.

Turn hem allowances up to inside, turn raw edges under, and baste. Work from outer side and use the twin needle to stitch 1 cm (3/8 in) from lower edges.

---

**BurdaStyle**

Lace Leggings 06/2012