

02/2011 Mesh shirt

By: burda style magazine

<http://www.burdastyle.com/projects/022011-mesh-shirt>



Mesh Shirt burda style magazine patterns FAQ

Materials

Green and white mesh fabric

Step 1 — Preparation


Größen, Tailles, Sizes						2		3		4		
1	N		L		K		Oberweite Tour de poitrine Bust		Tailleweite Tour des taille Waist		Hüftweite Tour des hanches Hip	
	5'6" 168 cm		5'9" 176 cm		5'3" 160 cm		ins	cm	ins	cm	ins	cm
	US	Eur.	US	Eur.	US	Eur.						
	6	32	6	64	6	16	30	76	23	58	32 ½	82
	8	34	8	68	8	17	31 ½	80	24 ½	62	34	86
	10	36	10	72	10	18	33	84	26	66	35 ½	90
	12	38	12	76	12	19	34 ¾	88	27 ¾	70	37	94
	14	40	14	80	14	20	36 ¾	92	29 ¾	74	38 ¾	98
	16	42	16	84	16	21	37 ¾	96	30 ¾	78	40 ¾	102
	18	44	18	88	18	22	39 ½	100	32 ½	82	41 ¾	106
	20	46	20	92	20	23	41	104	34	86	43 ½	110
	22	48	22	96	22	24	43 ½	110	36 ¾	92	45 ¾	116
	24	50	24	100	24	25	45 ¾	116	38 ¾	98	48	122
	26	52	26	104	26	26	48	122	41	104	50 ¾	128
	28	54	28	108	28	27	50 ½	128	43 ½	110	52 ¾	134
	30	56	30	112	30	28	52 ¾	134	45 ¾	116	55 ¾	140
	32	58	32	116	32	29	55 ¾	140	48	122	57 ¾	146
	34	60	34	120	34	30	57 ¾	146	50 ¾	128	60	152

Trace the pattern pieces from the pattern sheet.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), Å-sleeve hems 1.5 cm (5/8 in), no allowances on lower edges of front and back pieces.

Step 2 — Cutting out

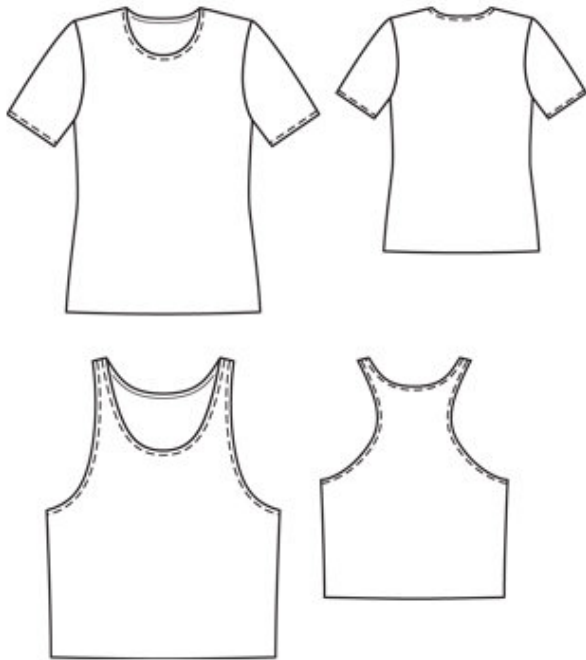

T-Shirt

Mesh fabric:

21 front, on a fold 1x

22 back, on a fold 1x

23 sleeve 2x

Jersey:

facing strip for neck edge, 45 — 46 — 47 — 48 — 49 cm (17³/₄ — 18¹/₈ — 18¹/₂ — 19 — 19¹/₄ ins) long, 4 cm (1⁵/₈ ins) wide (incl. allowance), cut widthwise.

Top

Mesh fabric:

24 front, on a fold 1x

25 back, on a fold 1x

Step 3 — Side seams

Stitch side seams, shoulder seams and sleeve seams as French seams (double seam) with a seam allowance of 1.5 cm (5/8 in): First lay fabric pieces wrong sides facing and stitch seam allowances together, 7 mm (1/4 in) from edge. Press seam open. Then lay pieces right sides together — seam lies exactly on fold. Now stitch 8 mm (generous 1/4 in) from fold edge, along marked seam line. Press seam allowances.

Step 4 — T-shirt

Stitch shoulder seams.

Step 5 — Neck edge

Fold facing strip for neck edge lengthwise, right side facing out, and press. Turn in ends of facing strip. Pin folded facing strip to neck edge so that fold edge of strip lies on garment piece, 1 cm (3/8 in) past seam line. Stitch along marked neck edge. Trim seam allowances. Turn facing to inside and stitch 8 mm (a generous 1/4 in) from edge.

Step 6 — Sleeve

Stitch side seams and sleeve seams. Press sleeve hem allowances to inside, turn in, and stitch.

Step 7 — Set in

Set in sleeves.

Step 8 — Top

Stitch side seams and shoulder seams.

Step 9 — Neck

Face neck edge and armholes with bias tape, as for neck edge of T-shirt.

BurdaStyle

02/2011 Mesh shirt