

70's Pants 06/2012

By: burda style magazine

<http://www.burdastyle.com/projects/70s-pants-062012>



These are a lovely pair of trousers that have a wide leg silhouette. They have a casual feel, and include features like back patch pockets and a stylized front leg seam with additional pockets. It's finished off with a thin waistband that sits at natural waist.

Step 1 — Preparations



This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).

Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (109). (This pattern also includes pattern pieces, lines and markings for style 108 that should be ignored.)

Lengthen pieces 21 and 22 as indicated in the cutting diagram. Trace the pocket piece from piece 21 as a separate pattern piece it is the same for all sizes.

The stitching line at the zip slit is marked for size 36. For sizes 38-44, remark the stitching line the same distance from centre front as for size 36, noting length of opening.


burda style magazine pattern do not have seam allowance included.

Seam and hem allowances to be added:


Seams and edges 1.5 cm (5/8 in), hem 6 cm (2 3/8 ins).

Step 2 — Cutting Out

Pattern Pieces 21-23

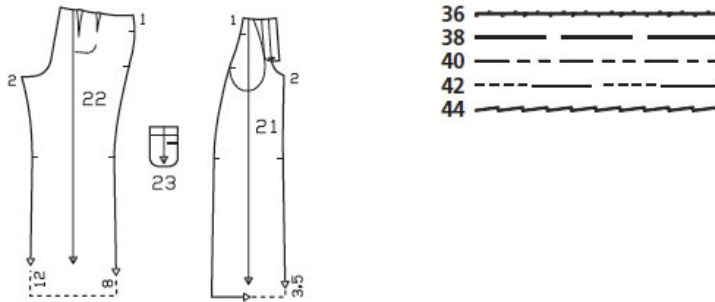

Lay the pattern pieces according to the diagram below for your size on two layers of fabric with a width of 150 cm

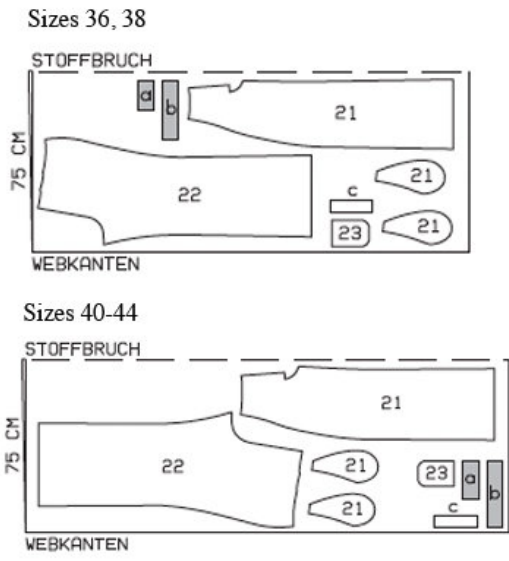

Stoffburch = fabric fold
Webkanten = selvage

Main Fabric,

- 21 front trouser piece 2x
- pocket piece 4x
- 22 back trouser piece 2x
- 23 back pocket 2x

Draft the following pattern pieces not included in the pattern:


- a) right front waistband piece
length: 9.5 10.5 11.5 12.5 13.5 cm (3 3/4 4 1/8 4 1/2 5 5 3/8 ins)
width: 7 cm (3 ins), finished width 3.5 cm (1 1/2 ins)
- left front waist band piece with 3 cm (1 1/4 in) underlap
length: 12.5 13.5 14.5 15.5 16.5 cm (5 5 3/8 5 3/4 6 1/4 6 1/2 ins)
width: 7 cm (3 ins), finished width 3.5 cm (1 1/2 ins),

b) 2 back waistband pieces
length: 25 26 27 28 29 cm (10 10 1/4 10 3/4 11 1/8 11 1/2 ins)
width: 7 cm (3 ins), finished width 3.5 cm (1 1/2 ins)

c) left underlap piece
length: 17 17 19 19 19 cm
width: 5 cm (2 ins), finished width 2.5 cm (1 in)

Interfacing: Iron to wrong side of waistband pieces.

Step 3 — Sewing

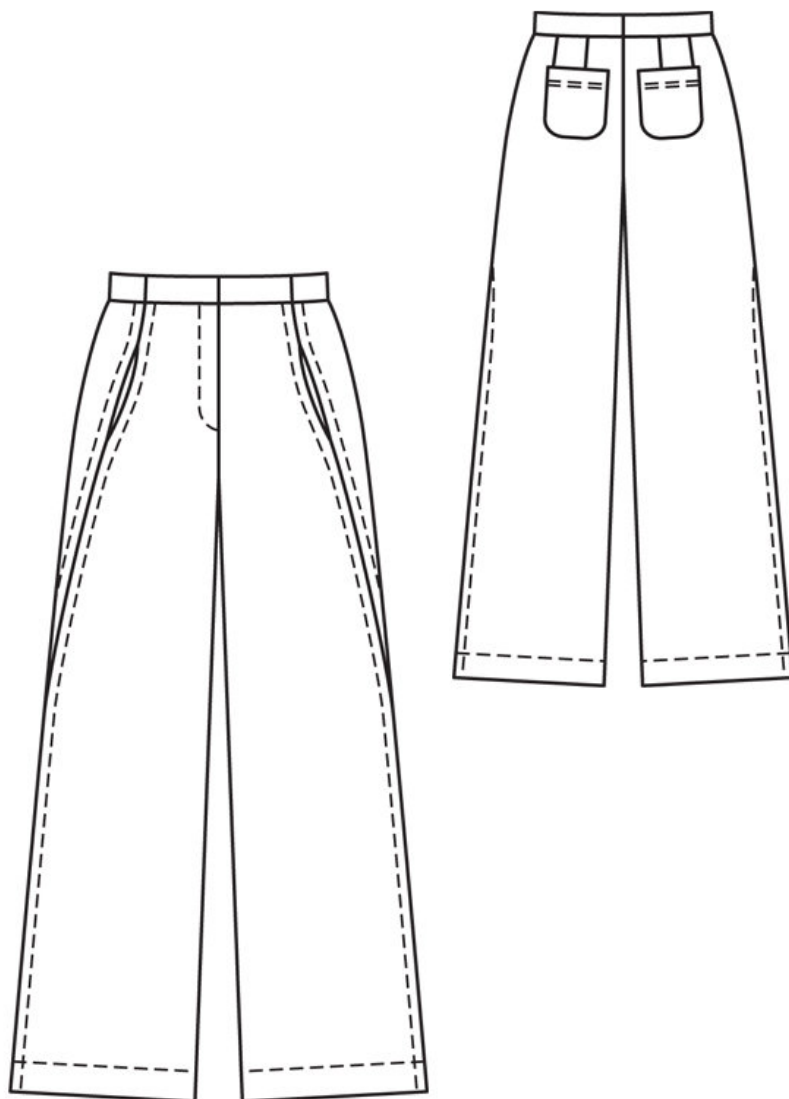

Stitch back darts together, starting at dart edges towards dart tip. Press darts to centre back.

Back pockets:

Turn self-facing on upper edge of each pocket piece to inside and stitch as marked. Press allowances on side

and lower edges to inside. Pin pockets to back trouser pieces, at abutting lines, and edgestitch around edges so pocket is secure in place.

Stitch forwarded side seams, making sure not to stitch across pocket openings.

Pin pocket pieces right sides together with seam allowances of pocket opening edges. On pocket opening edge, stitch along seam line and above pocket opening, stitch close to side seam. Press seams open and pressing pocket pieces apart. Topstitch front trouser pieces 1 cm (3/8 in) from seams, from upper edges to bottom of pocket opening. Press pocket pieces forward and stitch together. Baste upper pocket edges to trousers. Topstitch front trouser pieces below pocket openings. Topstitch back trouser pieces close to seams.

Stitch inside leg seams, from hem to crotch point. Stitch centre front seam from slit mark to inside leg seam at crotch point.

Zipper opening:

Press self-facings of slit edges to inside and stitch in place, along centre front on the right and 5 mm (3/16 in) before centre front on the left. Stitch zipper under left slit edge (underlap), stitching close to teeth of zipper. Pin slit closed, matching centre fronts. Stitch loose zipper tape to right facing, not catching shorts piece. Baste facing in place. Topstitch slit from upper edge to 2 cm (3/4 in) before the end, as marked. Fold slit underlap lengthwise and stitch across bottom end. Turn right side out. Lay underlap under left slit edge and pin to facing. Stitch facing to underlap, close to zipper joining seam. Lay the slit closed again and topstitch to the end, catching underlap.

Waistband and centre back seam:

Stitch front waistband pieces to back waistband pieces. Press seam allowances open. Fold waistband pieces in half lengthwise and press, wrong side facing in. Unfold waistband again. Stitch right and left waistband units to upper edges of shorts, stitching waistband underlap to underlap of slit. Press allowances of joining seams onto waistband pieces.

Stitch centre back seam right sides together. Press seam allowances open from upper edge to beginning of crotch curve. Work a buttonhole in the inside half of the waistband, 1 cm (3/8 in) from right front end. Fold waistband in half lengthwise, right sides together. On waistband ends, turn allowance of inside waist band edge up. Stitch waistband ends closed. Turn waist band right side out. Turn inside waistband edge under, approx. 4 cm (15/8 ins) long, and baste, then lay remaining edge flat over joining seam, not turned under. Work from right side to stitch along line of joining seam, catching inside waistband edge.

Topstitch around waistband close to all edges.

Press hem allowances to inside and baste. Topstitch close to lower trouser edges and again 5 cm (2 ins) from edges.

BurdaStyle

70's Pants 06/2012