

# burda style magazine 02/2010 Wide-legged trousers

By: burda style magazine

<http://www.burdastyle.com/projects/burda-style-magazine-022010-v>

---


Wide-legged trousers burda style magazine patterns FAQ

## Materials

Crepe

---

## Step 1 — Preparation

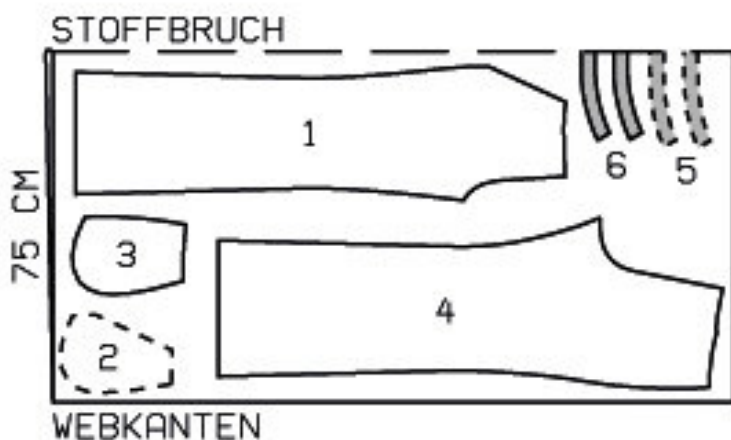

102 A, B 36-44

Trace the pattern pieces from the pattern sheet.


Lining: Lay the paper pattern piece for the front trouser on the paper pattern piece for the side hip yoke at the placement line and pin. This will create a small space at the top which will be folded later.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins). View A: Cut lining pieces with 1.5 cm (5/8 in) seam and hem allowance.

---

## Step 2 — Cutting Out

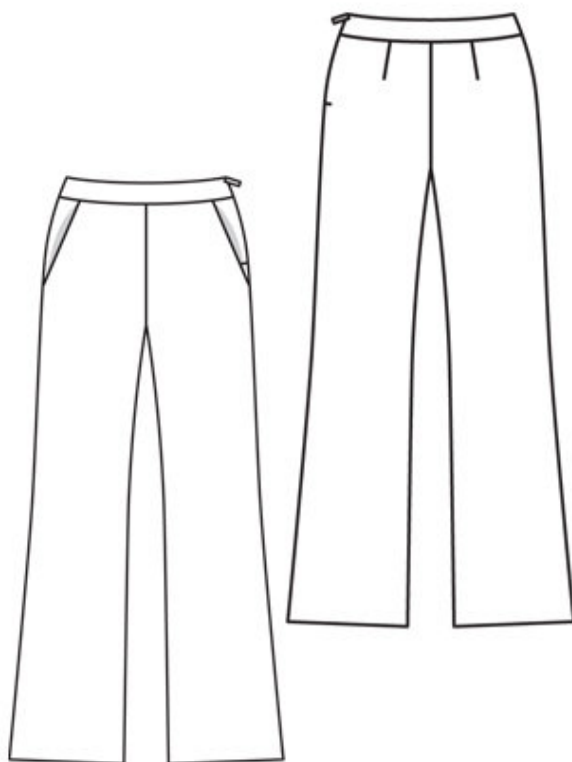

Crpe/gabardine:

1 front trouser piece 2x

2 pocket piece 2x

3 side hip yoke with

â— integrated pocket piece 2x

4 back trouser piece 2x

5 front waistband, on a fold 2x

6 back waistband, on a fold 2x

Lining, view A only: front trouser lining piece as listed under â— Preparationâ— and back trouser piece.

Interfacing : See pattern layout.

---

## Step 3 — Leg Seams

Stretch seam edges of inside leg seams on back trouser pieces above marking. Lay back trouser pieces right sides together. Iron inside leg edges above marking with a steam- iron or under a damp cloth to stretch until they match corresponding edge of front trouser piece.

---

## Step 4 — Darts

Stitch back darts and press toward centre.

---

## Step 5 — Hip Yoke Pockets

Stitch pocket pieces right sides together with pocket opening edges of front trouser pieces. Lay pocket pieces up and stitch to seam allowances close to seam. Turn pocket pieces to inside. Pin pocket opening edges to hip yokes at placement lines. Stitch pocket pieces together on inside. Baste pocket pieces to wrong side of front trouser pieces.

---

## Step 6 — Leg Seams and Waistband

Stitch right side seam. Stitch inside leg seams. Stitch right side seam on waistband pieces (stitch inside and outside waistband as mirror images). Press seam allowances open.

---

## Step 7 — Seam Allowances

Place one trouser leg over the other with right sides facing. Stitch front and back centre seam as continuous seam. Press seam allowances open from upper edges to beginning of curve. Do not press seam allowances flat along curve.

---

## Step 8 — Waistband

Stitch outer waistband piece to upper edge of trousers. Press seam allowances of joining seam onto waistband.

---

## Step 9 — Zipper

Sew invisible zip to left side seam edges of trousers and waistband. Stitch left side seam as far as zip.

---

## Step 10 — Lining

Line trousers: Stitch darts and seams on lining, leave opening 2 cm (3/4 in) longer than on outer trousers. Place lining inside trousers with wrong sides facing and baste to seam allowance of waistband joining seam, matching seams. Turn in opening edges of lining and stitch to zip tape from the top about 15 cm (6 ins) long, leave remainder free.

---

## Step 11 — Finishing Waistband

Lay inside waistband piece right sides together with stitched waistband piece, pin upper edges together. Turn ends of inside waistband piece back at zip opening 5 mm (3/16 in) before edge and pin to upper edge. Lay allowances of outer waistband pieces at edge of opening outward and pin to upper edge over inside waistband piece. Stitch along upper edge. Turn allowances at edge of opening to inside. Lay inside waistband piece up and stitch to seam allowances, close to seam, as far as possible. Turn inside waistband piece to inside, baste over joining seam without turning in, sew to zip tapes. Work from right side to stitch inside edge of waistband in line of joining seam.

---

## Step 12 — Finishing Hem Allowance

Press hem allowances to inside and sew on by hand. Turn in hem allowances of lining and stitch so that lining is 2 cm (3/4 in) shorter than trousers.

---

**BurdaStyle**

burda style magazine 02/2010 Wide-legged trousers