

# 04/2010 Narrow Leg Pants

By: burda style magazine

<http://www.burdastyle.com/projects/042010-narrow-leg-pants>

---


Narrow Leg Pants burda style magazine patterns FAQ

## Materials

canvas

---

## Step 1 — Preparation

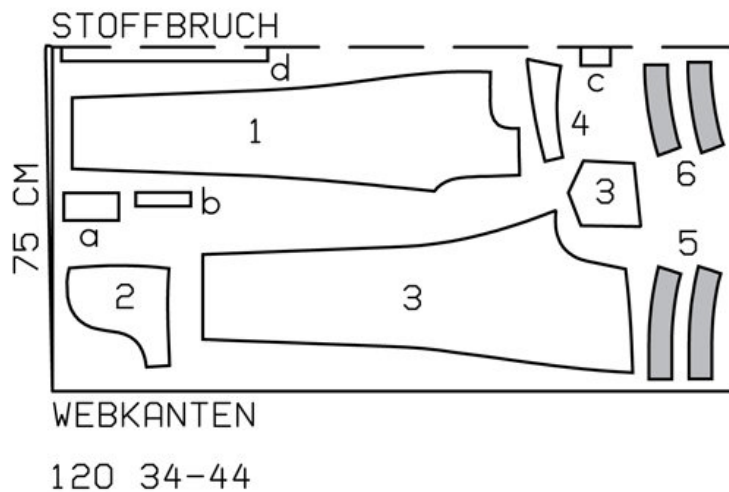

Trace the pattern pieces from the pattern sheet. Trace the pocket -piece from piece 1 as a separate pattern piece. Trace the pocket from piece 3 as a separate pattern -piece.

The stitching lines at the zip opening on piece 21 are marked for size 34. For sizes 36 — 42, mark the stitching lines the same distance from centre front as for size 34, noting length of opening.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 3 cm (1 1/4 ins).

---

## Step 2 — Cutting out



**Canvas:**

1 front trouser piece 2x

2 side hip yoke with

â— integrated pocket piece 2x

3 back trouser piece 2x

â— back pocket 2x

4 back yoke 2x

5 front waistband 4x

6 back waistband 4x

a) left underlap piece, 13 â— 13 â— 13 â— 15 â— 15 cm (5 1/4 â— 5 1/4 â— 6 â— 6 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins),

b) right facing, 13 â— 13 â— 13 â— 15 â— 15 cm (5 1/4 â— 5 1/4 â— 6 â— 6 ins) long, 3 cm (1 1/4 ins) wide,

c) small pocket, 7 cm (3 ins) long, 7 cm (3 ins) wide,

d) 5 belt carriers, a total of 45 cm (18 ins) long, 6 cm (2 1/2 ins) wide (incl. allowance).

**Lining:**

1 pocket piece 2x

Interfacing: See pattern layout.

### Step 3 — Stretch seam edges

Stretch inside leg seam edges of back trouser pieces, above marking. Lay back trouser pieces right sides facing. Stretch inside leg edges above marking by steam-pressing or pressing under a damp cloth until they match corresponding edges on front trouser pieces.

---

## Step 4 — Hip Yoke Pockets

Press allowance on upper edge of small pocket to inside and stitch 7 mm (1/4 in) from edge. Press allowance on side edge to inside. Lay pocket on left hip yoke, at placement line, and stitch. Stitch -pocket pieces to pocket opening edges of front trouser pieces. Turn pocket pieces to inside and press edges. Topstitch close to pocket opening edges and 7 mm (1/4 in) from edges. Pin -pocket opening edges to side hip -yokes, at placement lines. -Stitch pocket pieces together on inside. Baste -pocket pieces to wrong side of front trouser pieces.

---

## Step 5 — Back Yokes

Stitch back yokes to back trouser pieces and topstitch.

---

## Step 6 — Back Pockets

Press allowances on upper edges of pockets to inside, turn in, and stitch in place. Press remaining pocket allowances to inside. Pin pockets to back trouser pieces as marked. Stitch pockets in place.

---

## Step 7 — Stitch side seams

Topstitch back trouser pieces along seams. Stitch inside leg seams. Stitch centre front seam from slit mark to inside leg -seam.

---

## Step 8 — Zip opening

Pin right facing piece right sides together with right edge of opening. Turn facing to inside, press edge, and topstitch close to edge. Press allowance on left edge of opening (underlap) to inside, 5 mm (3/16 in) before centre front. Stitch zip under edge, stitching close to teeth of zip. Pin opening closed, matching centres. Stitch free zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch opening from upper edges to 3 cm (1 1/4 ins) before end, as marked. Also topstitch 7 mm (1/4 in) from this line of top-stitching. Fold underlap piece length-wise and -stitch across bottom end. Turn right side out. Lay underlap under left edge of opening and pin to allowance of opening. Stitch allow-ance of opening to underlap, close to zip joining seam. Close zip. Topstitch to end of opening, catching underlap.

---

## Step 9 — Belt Carriers

Fold strip for belt carriers length-wise, right side facing in. Stitch 1.5 cm (5/8 in) from fold edge. Turn right side out. Topstitch close to edge. Cut strip into 5 pieces. Baste belt carriers to upper edge of trousers, placing one next to each pocket opening edge in front and centred on yokes in back.

---

## Step 10 — Waistband and centre back seam

Stitch side seams on waistband -pieces. Stitch outer waistband unit to upper edges of trousers, leaving right end of waistband extending from centre front. Stitch left end of waistband to underlap of opening edge. Press allowances of join-ing seams onto waistband pieces. -Lay inside waistband unit right sides together with attached outer waistband unit and pin edges together. -Stitch across front ends of waistband (on the right at centre front) and along upper edges of waistband. Turn waistband right side out. In back, lay inside

waistband pieces up again and stitch centre back seam. Topstitch right half of trousers along centre seam. In front, turn inside edge of waistband under, about 5 cm (2 ins) long, and -baste, then lay remaining edge flat over joining seam, without turning in. Topstitch waistband close to edges. Work buttonhole in right end of waistband.

---

## **Step 11 — Belt carriers**

Stitch across belt carriers 7 mm (1/4 in) below waistband joining seam. Lay belt carriers up, turn ends in, and stitch to upper edge of waistband. Sew remaining belt carrier in place, over centre back seam.

---

## **Step 12 — Hem allowances**

Press hem allowances to inside, turn in, and stitch.

---

**BurdaStyle**

04/2010 Narrow Leg Pants