

burda style magazine 01/2010 Trousers

By: burda style magazine


<http://www.burdastyle.com/projects/burda-style-magazine-012010-t>

Trousers that can be casual or dressed up burda style magazine patterns FAQ

Materials

Cotton gabardine

Step 1 — Preparation

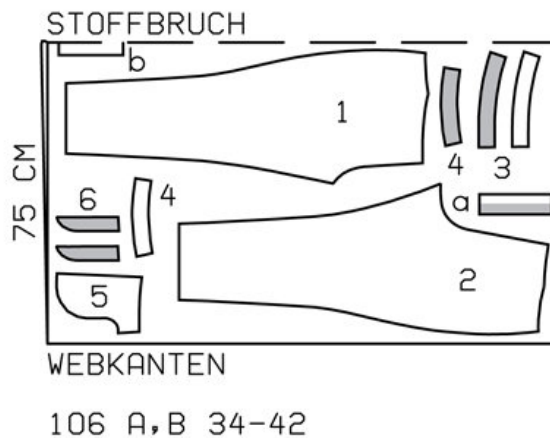


Trace the pattern pieces from the pattern sheet. Note different hem lines for views A, B and C. Trace the pocket lining piece from piece 5 as a separate pattern piece.

The stitching line at the zip opening is marked for size 34. For sizes 36 — 44, mark the stitching line the same distance from centre front as for size 34, noting length of opening.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

Step 2 — Cutting out

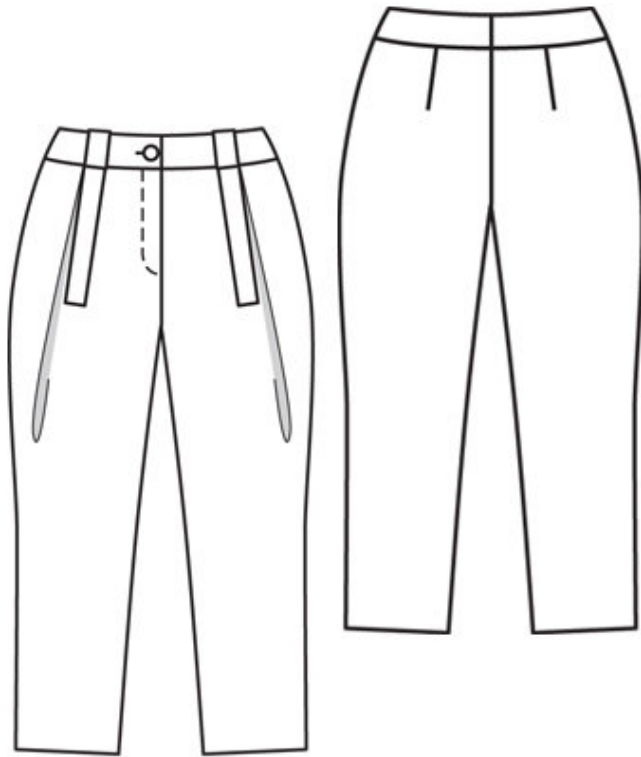

- 1 front trouser piece 2x
- 2 back trouser piece 2x
- 3 front waistband 4x
- 4 back waistband 4x
- 5 pocket piece 2x
- 6 right facing piece 1x
- 6 left underlap piece 2x

- a) 2 welts, 18 cm (7 ins) long, 5 cm (2 ins) wide, finished width 2.5 cm (1 in),
- b) 2 belt carriers, a total of 16 cm (6³/₈ ins) long, 6 cm (2³/₈ ins) wide (incl. allowances).

Piece of lining:

- 5 pocket lining piece 2x

Interfacing: See pattern layout. Iron interfacing to wrong side of outer waistband pieces. Interface right facing piece and one underlap piece. Also iron strips of interfacing, about 4 cm (1⁵/₈ ins) wide, to wrong side of fabric, over pocket markings.

Step 3 — Stretch seam edges

Lay back trouser pieces right sides together. Press inside leg seam edges above marking with a steam-iron or under a damp cloth until they are the same length as matching edges of front trouser piece.

Step 4 — Set-in welt pockets

Construct set-in welt pockets on front trouser pieces: Fold welts lengthwise, right side facing out, and press. Hand-baste an abutting line on right fabric side, 2.5 cm (1 in) from welt joining line (= finished width of welt). Pin doubled welts to trouser pieces so that fold edges meet abutting lines. Stitch welts and fabric pocket pieces right sides together along respective joining lines. Slash between lines of stitching and clip diagonally toward bottom ends of seams. Do not cut pocket pieces. Pull pocket pieces to inside and press welts into pocket openings. Fold edge of each welt meets pocket piece joining seam. Stitch pocket lining pieces to seam allowances of welt joining seams. Fold small triangles at bottom ends of clips to inside and stitch to welts and pocket pieces, from seam end to seam end. Stitch pocket pieces together. Baste pocket openings closed. Baste pocket pieces to wrong side of front trouser pieces.

Step 5 — Pleats

Work from inside to stitch pleats in front trouser pieces, from upper edge to arrow mark. Lay pleats in arrow direction and press. Baste to upper edge.

Step 6 — Side Seams

Stitch side seams and inside leg seams. Stitch centre front seam from slit mark to inside leg seam.

Step 7 — Zip opening

Stitch right facing piece right sides together with right edge of opening. Press edge. Press allowance on left edge of opening (underlap) to inside, 5 mm (3/16 in) before centre front, and understitch zip close to teeth. Pin opening closed, matching centres. Stitch loose zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch opening from upper edge to 3 cm (1 1/4 ins) before end, as marked. Stitch underlap pieces together along rounded lengthwise edges. Turn right side out. Lay underlap under left edge of opening and pin to allowance of edge. Stitch allowance to underlap, close to zip joining seam. Close zip. Topstitch to end of opening, catching underlap.

Step 8 — Belt carriers

Fold strip for belt carriers lengthwise, right side facing in. Stitch 2.5 cm (1 in) from fold edge. Turn right side out. Topstitch close to edge. Cut into two pieces. Baste belt carriers to upper edges of front trouser pieces, placing one above each welt.

Step 9 — Waistband and centre back seam

Stitch side seams on waistband pieces. Stitch outer waistband units to upper edges of trousers. Leave right end of waistband extending from centre front and stitch left end of waistband to underlap of opening edge. Press seam allowances of joining seams onto waistband pieces. Lay belt carriers up and stitch to seam allowance on upper edge of waistband, easing extra length. Lay inside waistband units right sides together with attached outer waistband pieces and pin edges together. Stitch across front ends of waistband (at centre front on the right) and along upper edge of waistband. Trim seam allowances, trimming corners diagonally. Turn waistband pieces right side out. Lay inside waistband pieces in back up again and press seam allowances on upper edge of waistband open, about 10 cm (4 ins) long. Stitch centre back seam. Turn in inside edge of waistband in front, about 5 cm (2 ins) long, and baste in place, then lay remaining edge flat

over joining seam. Work from right side of garment to stitch inside edge of waistband in place, along line of joining seam. Work a buttonhole in right end of waistband.

Step 10 — Hem allowances

Press hem allowances to inside and sew in place by hand.

BurdaStyle

burda style magazine 01/2010 Trousers