

12/2011 Herringbone jacket

By: burda style magazine

<http://www.burdastyle.com/projects/122011-herringbone-jacket>



Herringbone jacket burda style magazine patterns FAQ

Materials

Herringbone

Step 1 — Preparation




Paper cut for ANSI A (German DIN A4) prints:

This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).

burda style magazine pattern do not have seam allowance included.

Seam and hem allowances to be added: Seams and edges 1.5 cm (5/8 in).

Step 2 — Cutting out

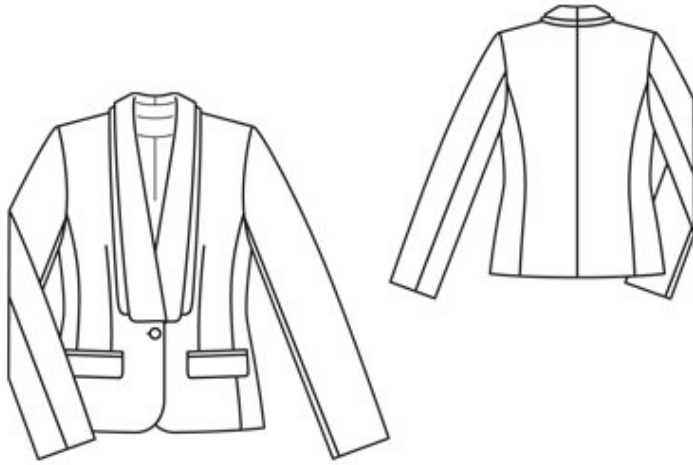

Herringbone:

1 front with under collar 2x

2 back 2x

3 side piece 2x

4 upper sleeve 2x

5 under sleeve 2x

6 under collar, on a fold 1x

7 top collar

8 (with integrated lapels) 2x

9 under collar

10 (collar which lies on top) 2x

11 collar stand, on a fold 3x

12 front facing with top collar 2x

13 collar stand, on a fold 1x

14 flap 4x

a) 4 piping strips, 17 — 17.5 — 18 — 18.5 — 19 cm (63/4 — 7 — 7 1/8 — 7 1/4 — 7 1/2 ins) long, 3 cm (1 1/4 ins) wide (incl. allowances),

b) 2 pocket pieces, 17 — 17.5 — 18 — 18.5 — 19 cm (63/4 — 7 — 7 1/8 — 7 1/4 — 7 1/2 ins) wide, 17 cm (6 3/4 ins) long (incl. allowances).

Lining: piece 1 as listed under — Preparation — ; piece 2 minus width of facing and with an ease pleat of approx. 2 cm (3/4 in) at centre back, pieces 3, 4, and 5; and pocket piece.

Interfacing: See pattern layout. Also interface hem allowances.

Step 3 — Bust darts

Stitch bust darts. On lower horizontal edge of front, clip up to end of seam. Press darts open, pressing points of darts flat. Lay horizontal edges of fronts together and baste together with herringbone stitch. Stitch side pieces to fronts. Press seam allowances open.

Step 4 — Slashed pockets with piping and flaps

Stitch each interfaced flap piece to flap piece with no interfacing, right sides together, leaving joining edge open. Turn right side out. Mark abutting lines for piping, 5 mm (3/16 in) from piping joining lines (= finished width of piping). Hand baste along these lines to make them visible on right side of fabric. Fold piping strips lengthwise and press, wrong side facing in. Lay folded piping strips on fronts and pin so that fold edges of piping meet abutting lines. Stitch piping to joining lines, stitching 5 mm (3/16 in) from fold edges. Slash between lines of stitching and clip diagonally toward each last stitch but do not cut piping. Press piping into pocket openings. Fold small triangles at pocket opening ends to inside and stitch to piping, from seam end to seam end. Slip joining edge of each flap through pocket opening, to inside and stitch to seam allowances, close to upper piping joining seam. Stitch pocket lining pieces to seam allowances of lower piping. Stitch pocket pieces of main fabric to seam allowances of flaps and upper welts. Trim pocket pieces even and stitch together.

Step 5 — Back

Stitch centre back seam and back section seams. Stitch shoulder seams.

Step 6 — Collar

On collar pieces (pieces 7, 8, and 10), stitch centre back seams. Stitch one collar stand piece 9 each to collar pieces 6, 7, and 8. Stitch collar stand piece 11 to collar piece 10. Trim seam allowances and press open. Topstitch close to each side of seams. Stitch under collar (piece 6) to integrated under collar of fronts, from seam number 6 to corner. Clip seam allowances of fronts diagonally into corners. Then stitch under collar with collar stand to front and back neck edge. Press seam allowances open. Lay collar (piece 7) right sides together with fronts and under collar and stitch along front edges and edges of collar, above markings. Trim seam allowances and clip allowances at marking. Turn collar right side out and press edges. Roll collar and work from underside of collar to pin collar pieces together, along fold line. Lay under collar (piece 8) above seam mark on front jacket edges on upper collar of jacket, right sides facing. Baste inside collar edges together and stitch together, approx. 10 cm (4 ins) long, at the ends. Pin inside collar edge to front, then stitch from right side as marked. Turn seamed collar back and pin to front. Pin facing with upper collar (piece 10) to fronts and under collar (piece 8), right sides together. Stitch front edges and collar edges together, at hem edge leaving the last 3 cm (1 1/4 ins) before inside edge of facing open. Trim seam allowances, clip front edges diagonally into corners. Turn facing to inside and turn collar right side out. Press edges.

Step 7 — Sleeve seams

Stitch sleeve seams. Press sleeve hem allowances to inside and sew in place by hand.

Step 8 — Sleeve caps

Set in sleeves, easing sleeve caps. Sew in shoulder pads.

Step 9 — Construct lining

On lining backs, stitch allowances of centre seam together, 1 cm (3/8 in) from edge. Stitch along centre back at top and bottom, each 5 cm (2 ins) long, to form ease pleat, and baste in between. Press pleat to one side. Stitch darts and seams of lining.

Step 10 — Lining

Stitch lining to inside edges of facing and collar, turning hem allowance of facings down to do so. Lay lining inside jacket, with wrong sides facing, pulling linings into sleeves. Pin collar joining seams together. Reach between top collar and lining to pull out the pinned collar joining seams. Stitch allowances together, close to collar joining seam. Push edges in place again. Turn in lining along lower edge of jacket. Press fold lightly, push upward in a shallow curve, and pin to hem allowance. Sew lining in place. Lay extra length of lining down and press lightly. Above each sleeve hem, pin a fold, approx. 1 cm (3/8 in) deep, in lining. Turn in sleeve linings and sew to hem allowances. Remove pins from folds and press extra length of lining down.

Step 11 — Buttonhole

Work buttonhole in right front.

BurdaStyle

12/2011 Herringbone jacket