

4/2010 Cropped Trousers

By: burda style magazine


<http://www.burdastyle.com/projects/42010-cropped-trousers>

Cropped Trousers burda style magazine patterns FAQ

Materials

Cotton poplin

Step 1 — Preparation

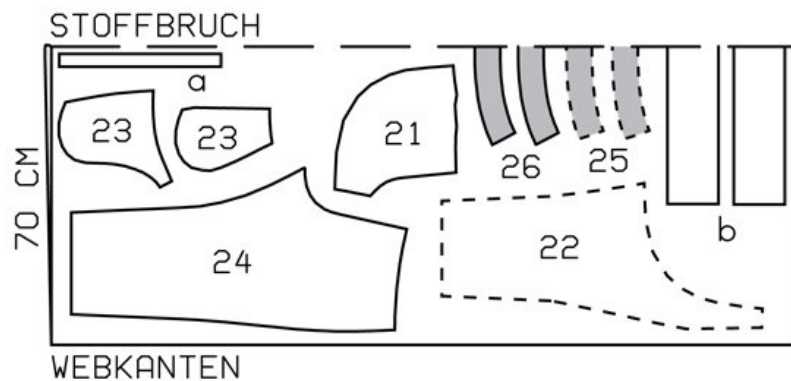


106 34-42

Trace the pattern pieces from the pattern sheet. Trace the pocket piece from piece 23, up to abutting line.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

Step 2 — Cutting Out

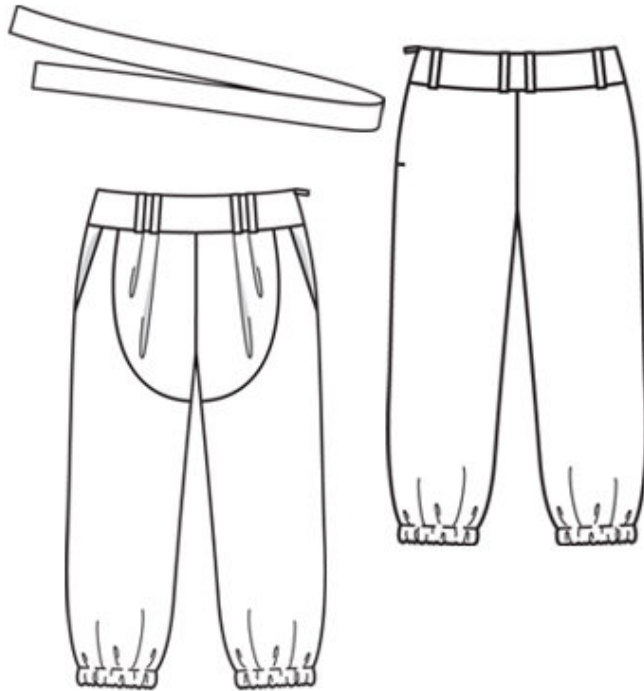

21 upper front trouser piece 2x

22 front trouser piece 2x

23 side hip yoke mit

â— integrated pocket piece 2x

â— â— pocket piece 2x

24 back trouser piece 2x

25 front waistband, on a fold 2x

26 back waistband, on a fold 2x

a) 8 belt carriers, a total of 76 cm (30 ins) long, 4 cm (15/8 ins) wide (incl. allowance),

b) tie belt, a total of 132 â— 136 â— 140 â— 144 â— 148 cm (52 â— 53 1/2 â— 55 1/4 â— 56 3/4 â— 58 1/4 ins) long, 12 cm (4 3/4 ins) wide, finish-ed width 6 cm (2 3/8 ins).

Interfacing: See pattern layout.

Step 3 — Front trouser pieces

Stitch upper front trouser pieces to front trouser pieces. Topstitch upper pieces close to seams. Fold pleats in upper edge of trousers in arrow direction and baste.

Step 4 — Hip yoke pockets

Stitch pocket pieces to pocket opening edges of front skirt panel. Lay pocket pieces up and stitch to seam allowances, close to seam. Turn pocket pieces to inside. Pin pocket opening edges to side hip yokes at placement lines. Stitch inside edges of pocket pieces together. Baste pocket pieces to wrong side of front

skirt panel.

Step 5 — Seams

Stitch right side seam. Stitch inside leg seams, leaving seams open below hem line, to insert elastic. Press seam allowances open. Place one trouser leg inside the other, with right sides facing. Stitch front and back seam as continuous seam. Press seam allowances open from upper edges to beginnings of curve.

Step 6 — Belt carriers

Neaten lengthwise edges of strip for belt carriers and press 13 mm (a good 1/2 in) wide to wrong side. Top-stitch close to fold edges. Cut strip into 8 equal pieces. Baste belt carriers to upper edge of trousers, next to pleat folds in front and 2.5 cm (1 in) from side seams and 1.5 cm (5/8 in) to each side of centre back seam in back.

Step 7 — Waistband, invisible zip, left side seam

Stitch right side seam on outer waistband unit and stitch seam on inside waistband unit as mirror image. Stitch outer waistband to upper edge of skirt. Press seam allowances of joining seam onto waistband. Sew invisible zip to left opening edges and to edge of outer waistband. Stitch left side seam from lower edge to zip. Pin inside waistband unit right sides together with upper edge of outer waistband. Turn inside waistband back at edge of zip opening, about 5 mm (3/16 in) before edge, and pin to upper edge of waistband. Lay allowances of skirt at edges of opening outward and pin to upper edge of waistband, over inside waistband. Stitch along upper edge of waistband. Turn allowances at edges of opening to inside. Lay inside waistband up and stitch to seam allowances, close to seam, as far as possible. Turn inside waistband to inside and sew to zip tapes. Work from right side of skirt to stitch along line of waistband joining seam.

Step 8 — Hem

Lay hem allowances to inside, turn in and stitch 2.5 cm (1 in) from edge to form elastic casing. Insert elastic. Stitch ends together for a circumference of about 32 — 33 — 34 — 36 — 37 cm (12 3/4 — 13 — 13 1/2 — 14 1/4 — 14 1/2 ins).

Step 9 — Tie belt

Fold tie belt lengthwise, right side in. Stitch edges of belt together, leaving an opening for turning. Turn belt right side out. Topstitch close to edges, thereby stitching opening closed.

BurdaStyle

4/2010 Cropped Trousers