

burda style magazine 02/2010 Peasant Blouse

By: burda style magazine


<http://www.burdastyle.com/projects/burda-style-magazine-022010->

Peasant Blouse For more information on this and other burda style magazine patterns, please see this dedicated blog post.

Materials

Plaid batiste

Step 1 — Preparation

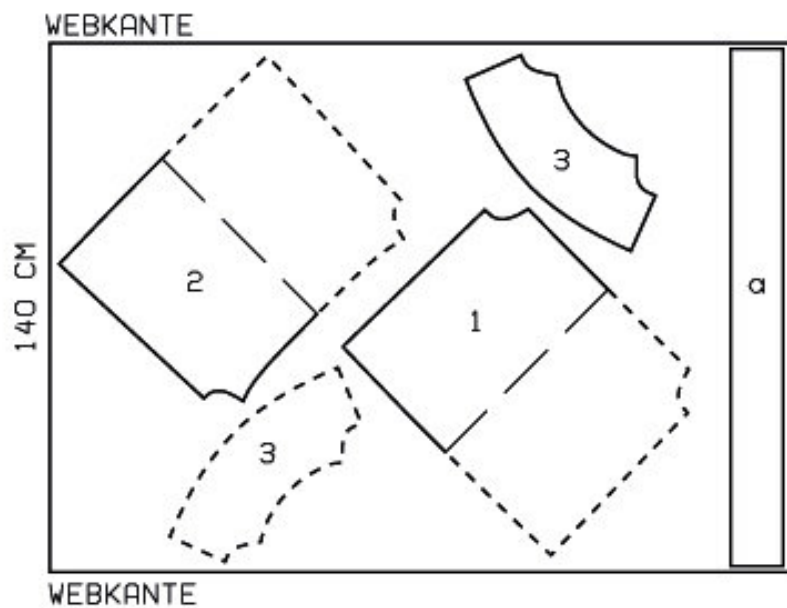


117 34/36-42/44

See the pattern overview above for all pattern details. Trace the pattern pieces from the pattern sheet. Follow lines and details for style 117.

TIP: It will be easier to cut out the pattern pieces if you trace them a second time and stick the pieces together at center front and back.

Step 2 — Cutting Out

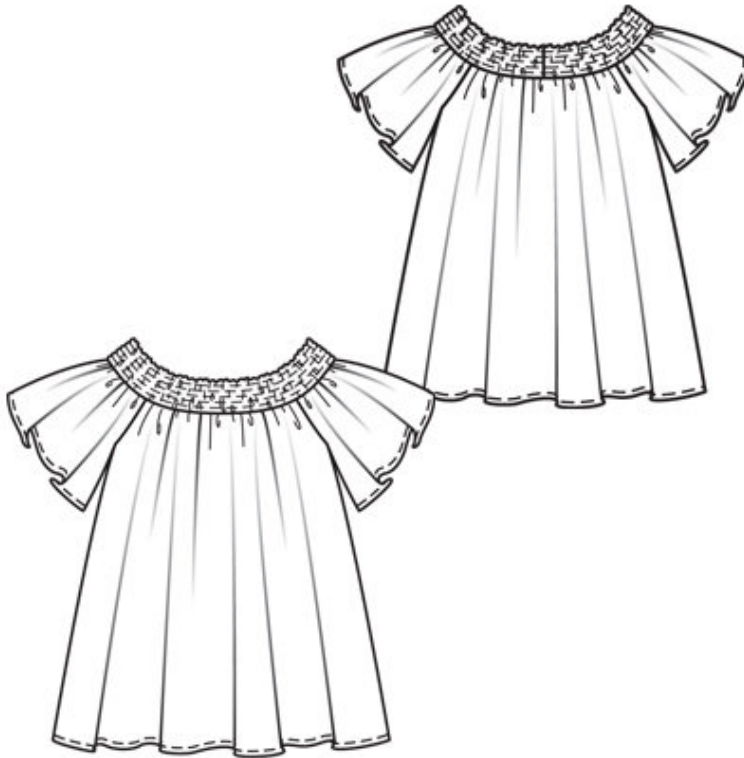

The pattern layout below shows you how to place the pattern pieces on the fabric. Make sure that the grain line marked on the pattern pieces runs parallel to the selvages.

Plaid batiste:

1 front, on a fold x1

2 back, on a fold x1

3 sleeve x2

a) neckline band, 138 cm (54 1/2 ins) long, 14 cm (5 1/2 ins) wide, finished width 7 cm (2 3/4 ins).

Seam and hem allowances:

Use a ruler and tailor's chalk to mark seam and hem allowances round the paper pattern pieces: 1 cm (3/8 ins) at ends of bands, 1.5 cm (5/8 in) at all other seams and edges. Cut out the fabric pieces along these lines.

Transfer pattern lines to the fabric:

Transfer pattern piece outlines (seam and hem lines) and all other lines and markings on the pattern pieces, except the grain line, to the wrong fabric side with a tracing wheel and Burda tracing paper (see detailed instructions included with the pack.)

Step 3 — Right side of fabric

Place right sides of fabric together to baste and stitch.

Secure start and end of seam by backstitching.

Step 4 — Side Seams

Lay front right sides together with back. Pin side seams. Stitch (1). Neaten seam allowances together and press onto back.

Step 5 — Sleeves

Fold sleeves lengthwise right side facing in. Pin sleeve seams. Stitch (2). Neaten seam allowances together and press to one side.

Step 6 — Hem and Sleeve Hems

Press hem allowance to inside, turn in to half the width and stitch a narrow hem (3).

Step 7 — Stitch on the sleeves

Pin sleeves right sides together with edges of armholes. Match sleeve seams and side seams. Match markings 4 on sleeve and front and match seam lines. Stitch (4). Neaten seam allowances together and press open, from upper edges to beginning of curve.

Step 8 — Gather edge of neckline

To gather edge of neckline on front and back pieces and on sleeves, stitch a line of machine basting (longest stitch setting) to each side of marked seam line, from sleeve joining seam to sleeve joining seam. Hold bobbin threads and push the fabric together along the threads until front and back each measure 46 cm (18 1/8 ins) and sleeve edges 23 cm (9 1/8 ins). Knot threads. Distribute gathering evenly (5).

Step 9 — Neckline band, elastic shirring

Fold band in half lengthwise, wrong side facing in. Press. Mark 4 points on open edges to help stitch on the neckline band properly: Mark one point 24 cm (9 1/2 ins) from narrow edge (incl. 1 cm / 3/8 in seam allowance). Mark a second point 23 cm (9 1/8 ins) from the first mark. Clip into seam allowances of joining edge at these points by about 5 mm (3/16 in). Unfold band again. Lay a piece of shirring elastic on wrong fabric side of band, exactly within the pressed crease. Stitch over elastic at a zigzag setting, beginning and ending 1 cm (3/8 in) before ends of band (= width of seam allowance). The zigzag stitch should be just wide enough not to catch the elastic or you will not be able to pull it to shirr the fabric (6).

Fold band again on fold line, with wrong side facing in, and pin open edges together. For the rest of the shirring, mark 7 more lines on one half of band (= inside half) at intervals of 9 mm (a scant 3/8 in). Lay shirring elastic on the marked lines and zigzag stitch over it. Pull the elastic to shirr the neckband to the following length, for

size 34/36: 68 cm (26 3/4 ins),

size 38/40: 71 cm (28 ins),

size 42/44: 74 cm (29 1/4 ins).

Knot elastic securely.

Stitch narrow edges of bands together, 1 cm (3/8 in) wide, with inside half of band facing out (7). Spread seam allowances apart and sew to upper edge of band, with a few stitched by hand.

Lay neckband right sides together with upper edge of blouse. Pin marked points to sleeve inset seams, matching seam of neckband with centre back seam. Stretch neckband to fit upper edge of blouse, pin in

place, and stitch (8). Neaten seam allowances together and turn down.

BurdaStyle

burda style magazine 02/2010 Peasant Blouse