

4/2010 Boyfriend Trousers

By: burda style magazine


<http://www.burdastyle.com/projects/42010-boyfriend-trousers>

Boyfriend Trousers burda style magazine patterns FAQ

Materials

Viscose/rayon linen blend

Step 1 — Preparation

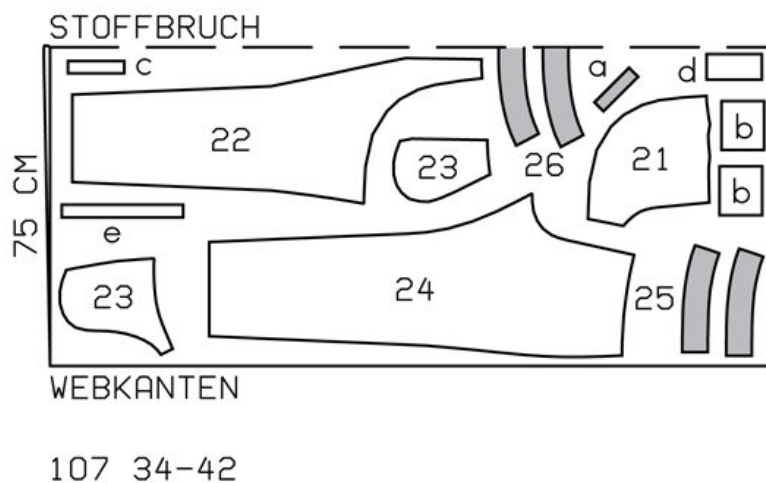


Trace the pattern pieces from the pattern sheet. Trace the -pocket -piece from piece 23, up to abutting line. The stitching line at the zip opening is marked for size 34. For sizes 36 — 42, mark the stitching line the same distance from centre front as for size 34.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

Step 2 — Cutting Out

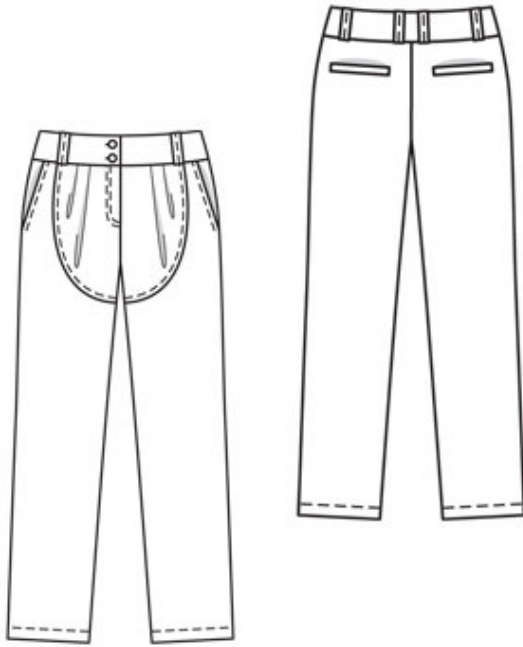

21 upper front trouser piece 2x

22 front trouser piece 2x

23 side hip yoke mit

â— integrated pocket piece 2x

â— â— pocket piece 2x

24 back trouser piece 2x

25 front waistband 4x

26 back waistband, on a fold 2x

a) 2 bias welt strips (back pockets), 15 cm (6 ins) long, 5 cm (2 ins) wide (incl. allowance),

b) 4 pocket pieces (back pockets), 15 cm (6 ins) wide, 13 cm (5 1/4 ins) long (incl. allowance),

c) right facing piece, 13 cm (5 1/4 ins) long, 3 cm (1 1/4 ins) wide,

d) left facing piece, 13 cm (5 1/4 ins) long, 6 cm (2 1/2 ins) wide, finished width 3 cm (1 1/4 ins),

e) 6 belt carriers, a total of 57 cm (22 1/2 ins) long, 4 cm (1 5/8 ins) wide (incl. allowance).

Interfacing: See pattern layout. Iron strips of interfacing, about 4 cm (1 5/8 ins) wide, to wrong side of back trouser pieces, over pocket markings.

Step 3 — Front trouser pieces

Stitch upper front trouser pieces to front trouser pieces. Topstitch upper pieces close to seam and 7 mm (1/4 in) from seam. Fold pleat in upper edge of trousers in arrow direction and baste.

Step 4 — Hip yoke pockets

Stitch pocket -pieces right sides together with -pocket opening edges of front trouser pieces. Turn pocket -pieces to inside. Topstitch close to pocket opening edges and 1 cm (3/8 in) from these edges. Pin pocket opening edges to side hip -yokes at placement lines. Stitch -pocket edges together. Baste pocket -pieces to wrong side of front trouser pieces, first trimming away allowance of right pocket piece at centre front.

Step 5 — Construct single welt pockets on back trouser pieces

Mark an abutting line for welts, 1.5 cm (5/8 in) from each welt joining line (= finished width of welt). Fold welt strips lengthwise, right side facing out, and press. Baste doubled welt strips to welt joining line so that fold edge of welt meets abutting line and open lengthwise edges lie between pocket lines. Stitch welt in place along welt joining line. Stitch one pocket piece to each pocket piece joining line. Slash between lines of stitching and clip diagonally toward ends of seams, not cutting into welts or pocket pieces. Lay welts into pocket opening and pull pocket pieces to inside. Stitch remaining pocket pieces to seam allowances of welt joining seams. Fold small triangles of fabric at ends of pocket openings to inside and stitch to welt and pocket pieces, from seam end to seam end. Trim pocket pieces even and stitch together.

Step 6 — Seams

Stitch side seams. Topstitch back trouser pieces close to seams. Stitch inside leg seams. Stitch centre front seam from slit mark to inside leg seam.

Step 7 — Zip opening

Pin right facing piece right sides together with right edge of opening. Turn facing to inside, press edge, and topstitch close to edge. Press allowance on left edge of opening (underlap) to inside, 5 mm (3/16 in) before centre front. Stitch zip under edge, stitching close to teeth of zip. Pin opening closed, matching centres. Stitch free zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch opening from upper edges to 3 cm (1 1/4 ins) before end, as marked. Also topstitch 7 mm (1/4 in) from this line of topstitching. Fold underlap piece lengthwise and stitch across bottom end. Turn right side out. Lay underlap under left edge of opening and pin to allowance of opening. Stitch allowance of opening to underlap, close to zip joining seam. Close zip. Topstitch to end of opening, catching underlap.

Step 8 — Centre back seam

Stitch centre back seam. Topstitch right half of trousers close to centre back seam.

Step 9 — Belt carriers

Neaten lengthwise edges of strip for belt carriers and press 13 mm (a good 1/2 in) wide to inside. Topstitch close to edges and down middle of strip. Cut strip into 6 equal -pieces. Baste belt carriers to upper edge of trousers, over section seams in front and 2.5 cm (1 in) from each side seam and 1.5 cm (5/8 in) to each side of centre back seam in back.

Step 10 — Waistband

Stitch side seams on waistband. Stitch outer waistband to upper edge of trousers, leaving right end of waistband extending from centre front. Stitch left end of waistband to underlap of opening edge. Press seam allowances of joining seam onto waist-band. Press allowance on lower edge of inside waistband to wrong side. Pin inside waistband right sides together with attached outer waistband. Stitch across front ends of waist-band (at centre front on the right) and along upper edge of waistband. Trim seam allowances. Turn waistband right side out. Baste inside edge of waist-band in place. Topstitch closed to edges of waist-band. Lay belt carriers up, turn ends in and stitch to upper edge of waistband. Work buttonholes in right front waist-band piece.

Step 11 — Hem

Press hem allowances to inside, turn in to a width of 2 cm (3/4 in), and stitch in place.

BurdaStyle

4/2010 Boyfriend Trousers