

06/2011 Top with back zipper

By: burda style magazine

<http://www.burdastyle.com/projects/062011-top-with-back-zipper>



Top with back zipper burda style magazine patterns FAQ

Materials

Terry velour


Step 1 — Preparation

Trace the pattern pieces from the pattern sheet.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem and sleeve hems 3.5 cm (1 1/2 ins).

Step 2 — Construction

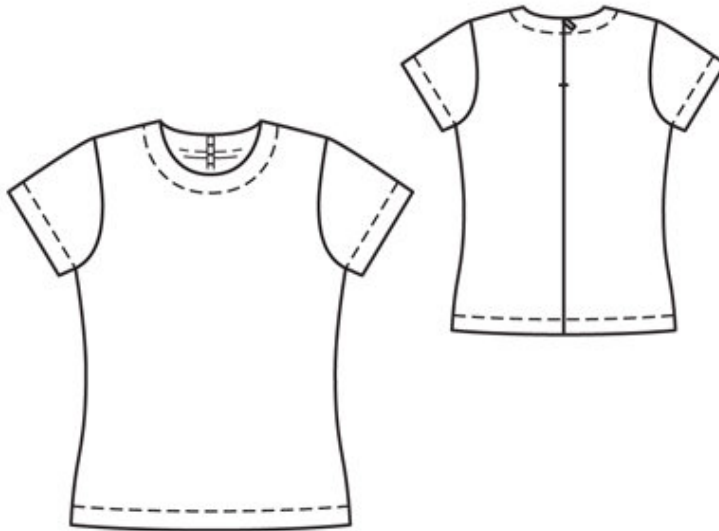

1 front, on a fold 1x

2 back 2x

3 sleeve 2x

4 front neck facing, on a fold 1x

5 back neck facing 2x

Interfacing: See pattern layout. Iron Vilene Bias Tape to wrong side of fabric on shoulder edges of front and on edges of back zip slit.

Step 3 — Zip

Sew invisible zip to back slit edges. Stitch centre back seam from lower edge to zip. Trim extending end of zip and bind with a scrap of fabric.

Step 4 — Side seams

Stitch side seams, shoulder seams, and facing seams. Press seam allowances open.

Step 5 — Neck edge

Pin facing right sides together with neck edge. At zip slit, turn facing back, about 5 mm (3/16 in) before edge of opening, and pin to upper edge. At slit edges, turn allowances to outside and pin to neck edge, over facing. Stitch facing to neck edge. Trim seam allowances. Turn slit edges and facing to inside. Sew facing to zip tapes. Topstitch 3 cm (1 1/4 ins) from neck edge.

Step 6 — Sleeve seams

Stitch sleeve seams. Press sleeve hem allowances to inside and stitch 2.5 cm (1 in) from lower edges.

Step 7 — Sleeve caps

Set in sleeves, easing sleeve caps.

Step 8 — Hem allowance

Press hem allowance to inside and stitch 2.5 cm (1 in) from lower edge.

BurdaStyle

06/2011 Top with back zipper