

## 3/2011 Oversize Tank

By: burda style magazine

<http://www.burdastyle.com/projects/32011-oversize-tank>

---



Oversize Tank burda style magazine patterns FAQ

### **Materials**

Plain stretch jersey

---

## Step 1 — Preparation


Trace the pattern pieces from the pattern sheet.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins) (flare hem allowances).

---

## Step 2 — Cutting Out

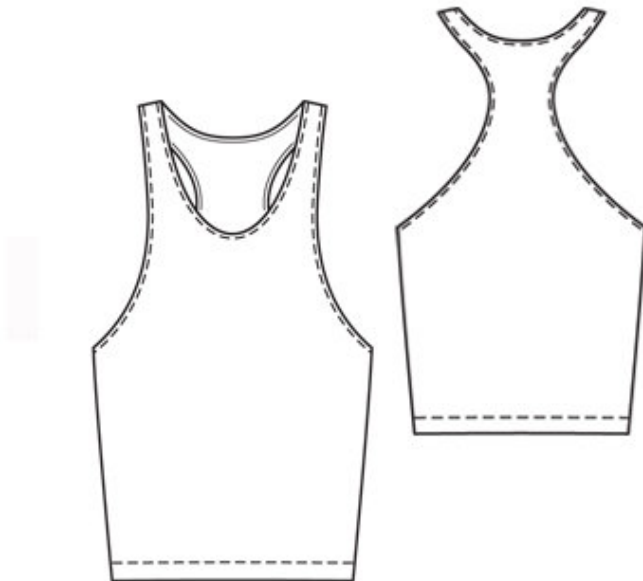

21front, on a fold 1x

22back, on a fold 1x

Vilene Bias Tape (stay tape): Iron to all neck and armhole edges and to shoulder seam edges of front.

---

## Step 3 — Stitch shoulder seams

Stitch shoulder seams. Trim allowances to 7 mm (1/4 in) wide, neaten together, and press onto back.

---

## Step 4 — Press allowance on neck and armhole edges to inside

Press allowance on neck and armhole edges to inside. Stitch from right side of garment, 1 cm (3/8 in) from edges, with the twin needle.

---

## **Step 5 — Stitch side seams**

Stitch side seams. Trim seam allowances to 7 mm (1/4 in) wide, neaten to-gether, and press onto back. Sew upper ends of seam allowances in place by hand.

---

## **Step 6 — Press hem to inside**

Press hem to inside. Stitch from right side, 3.5 cm (1 1/2 ins) from lower edge, with the twin machine needle.

---

**BurdaStyle**

3/2011 Oversize Tank