

## 02/2011 Bustier

By: burda style magazine

<http://www.burdastyle.com/projects/022011-bustier>

---



Bustier burda style magazine patterns FAQ

### **Materials**

striped rayon/viscose-linen blend with crosswise stretch

---

## Step 1 — Preparation

Größen, Tailles, Sizes						2		3		4		
1	N		L		K		Oberweite Tour de poitrine Bust		Tailleweite Tour des taille Waist		Hüftweite Tour des hanches Hip	
	5'6" 168 cm		5'9" 176 cm		5'3" 160 cm		ins	cm	ins	cm	ins	cm
	US	Eur.	US	Eur.	US	Eur.						
	6	32	6	64	6	16	30	76	23	58	32 ½	82
	8	34	8	68	8	17	31 ½	80	24 ½	62	34	86
	10	36	10	72	10	18	33	84	26	66	35 ½	90
	12	38	12	76	12	19	34 ½	88	27 ½	70	37	94
	14	40	14	80	14	20	36 ½	92	29 ½	74	38 ½	98
	16	42	16	84	16	21	37 ½	96	30 ½	78	40 ½	102
	18	44	18	88	18	22	39 ½	100	32 ½	82	41 ½	106
	20	46	20	92	20	23	41	104	34	86	43 ½	110
	22	48	22	96	22	24	43 ½	110	36 ½	92	45 ½	116
	24	50	24	100	24	25	45 ½	116	38 ½	98	48	122
	26	52	26	104	26	26	48	122	41	104	50 ½	128
	28	54	28	108	28	27	50 ½	128	43 ½	110	52 ½	134
	30	56	30	112	30	28	52 ½	134	45 ½	116	55 ½	140
	32	58	32	116	32	29	55 ½	140	48	122	57 ½	146
	34	60	34	120	34	30	57 ½	146	50 ½	128	60	152


Trace the pattern pieces from the pattern sheet. Cut pattern piece 1 apart on the marked seam line = centre front and front band.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), curved seams 1 cm (3/8 in).

---

## Step 2 — Cutting out

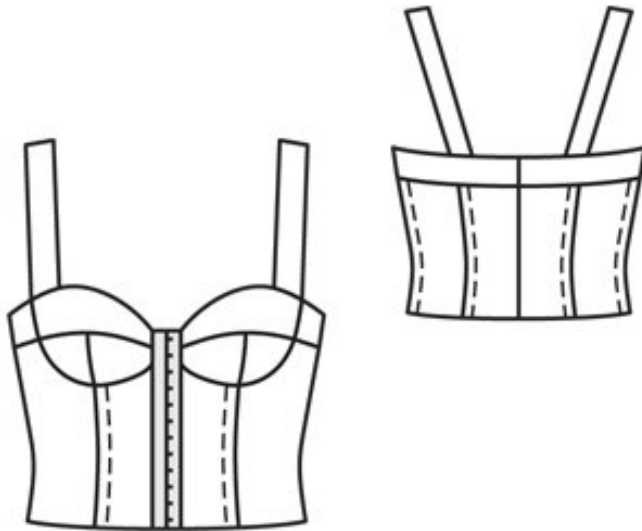

Rayon/viscose-linen:

1 centre front 2x

1 front band 2x

2 side front 2x

3 centre back 2x

4 side back 2x

5 lower centre bust piece 4x

6 lower side bust piece 4x

7 upper bust piece 4x

8 back band 4x

9 strap 4x

a) underlap, 23 cm (9 1/8 ins) long, 5 cm (2 ins) wide, finished width 2.5 cm (1 in).

Lining: pieces 1 to 4.

Interfacing: See pattern layout.

---

### Step 3 — Center back seams

Stitch centre seam on centre backs. Press seam allowances open.

---

### Step 4 — Fronts

Stitch centre fronts to side fronts, and stitch centre back to side backs. Stitch side seams. Press seam allowances of section seams toward centre and press allowances of side seams toward back. Topstitch 1 cm

(3/8 in) from seams.

---

## Step 5 — Interfaced bands

Stitch centre back seams on interfaced bands and bands with no interfacing. Stitch interfaced band to upper edge of side fronts and to back. Press allowances up.

---

## Step 6 — Bust

Stitch lower centre bust pieces to lower side bust pieces. Stitch upper bust pieces to lower bust pieces. Stitch interfaced bust pieces to fronts and to side edges of back band. Press seam allowances onto bust pieces.

---

## Step 7 — Boning tape

Cut lengths of boning tape for section seams and side seams, each 5 mm (3/16 in) shorter than respective seam (finished length without allowances). Round off ends of boning slightly. Slip boning tape under topstitched seam allowances.

---

## Step 8 — Straps

Lay each interfaced strap piece on strap piece with no interfacing, right sides together. Stitch lengthwise edges together. Turn straps right side out. Baste front ends of straps to interfaced bust pieces, between markings (seam number 7).

---

## Step 9 — Lining

Stitch centre back seam of lining. Stitch section seams and side seams. Stitch band with no interfacing to upper edge of lining. Stitch bust pieces with no interfacing to lining piece.

---

## Step 10 — Lining

Pin lining (with band and bust pieces) right sides together with garment. Stitch along upper and lower edge of garment. Turn garment right side out. Baste lining to front edges.

---

## Step 11 — Front bands

Stitch front bands to bust pieces and fronts. Press seam allowances of band joining seam and of other long edge of bands onto bands. Fold bands on fold line, right side facing in, and stitch across top and bottom narrow edges. Turn bands right side out and press. Sew inside edges in place by hand. Lay tape with hooks over front edge of right front. Lay eyelet tape over front edge of left front. Baste hook-and-eye tapes in place, turning ends under. Edgestitch tapes in place.

---

## Step 12 — Underlap

Fold underlap piece lengthwise, right side facing in. Stitch across ends. Turn underlap right side out and press. Lay underlap under left front edge so that it extends by 2.5 cm (1 in). Stitch underlap in place along band joining seam.

---

## Step 13 — Strap length

Pin back ends of straps under upper back edge, between markings. Try on garment to determine correct strap length. Sew straps in place.

---

**BurdaStyle**

02/2011 Bustier