

5/2010 Jumpsuit

By: burda style magazine


<http://www.burdastyle.com/projects/52010-jumpsuit>

Jumpsuit burda style magazine patterns FAQ

Materials

Crosswise stretch cotton satin

Step 1 — Preparation

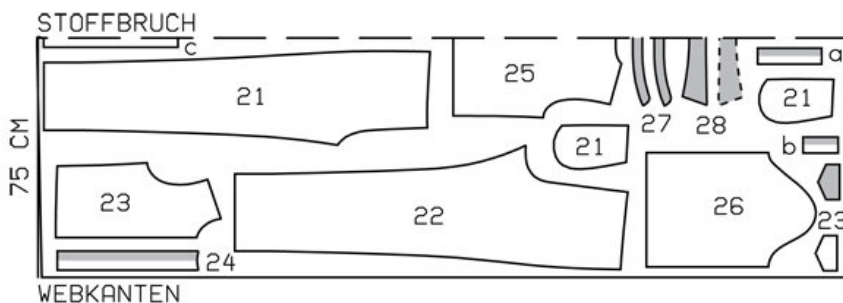

119 34-42

Trace the pattern pieces from the pattern sheet. Glue pieces 21 and 21a and pieces 22 and 22a together on the joining lines. Trace the pocket piece from piece 21 as a separate pattern piece — it is the same for all sizes. Trace the flap from piece 23 as a separate pattern piece and mark upper edge as the joining line on the front. The buttonholes on piece 24 are marked for size 34. For sizes 36 — 42, mark the top buttonhole the same distance from upper edge as for size 34. The bottom buttonhole is in the same place for all sizes. Space the other buttonholes evenly in between. The stitching lines for the elastic casing (upper edge) on pieces 21 and 22 is marked for size 34. For sizes 36 — 42, remark the stitching lines according to the size lines.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), lower front and back edge 5 cm (2 ins), lower edge of band 5 cm (2 ins), -sleeve hems 3 cm (1 1/4 ins). Hem allowances are already included on the trouser pieces.

Step 2 — Cutting Out



21 front trouser piece 2x

22 pocket piece 4x

23 back trouser piece 2x

24 front 2x

25 flap 4x

26 front band 2x

27 back, on a fold 1x

28 sleeve 2x

29 collar band, on a fold 2x

30 collar, on a fold 2x

a) 2 sleeve tabs, 20 cm (8 ins) long, 5 cm (2 ins) wide, finished width 2.5 cm (1 in),

b) 2 shoulder tabs, 11 cm (4 3/8 ins) long, 5 cm (2 ins) wide, finished width 2.5 cm (1 in),

c) 4 belt carriers, a total of 42 cm (16 1/2 ins) long, 6 cm (2 3/8 ins) wide (incl. allowance).

Interfacing: See pattern layout.

Step 3 — Side seams and shoulder seams

Stitch side seams and shoulder seams on upper part of garment.

Step 4 — Flaps

Stitch each interfaced flap piece to a flap piece with no interfacing, right sides together, along outer edges. Turn right side out. Topstitch flaps close to edges and 7 mm (1/4 in) from edges. Work buttonhole, centred,

in flap, 1.5 cm (5/8 in) from lower edge of flap. Stitch flaps to fronts (joining lines), press flaps down and stitch again next to joining seam.

Step 5 — Bands

Stitch front bands to fronts. Press seam allowances of band joining seams and of other long edges of bands onto bands. Fold bands to inside on fold line. Baste inside edges of bands in place. Topstitch bands close to joining seam and topstitch close to front edges.

Step 6 — Collar with collar band

Stitch collar pieces right sides together along outer edges. Turn collar right side out and press. Top-stitch close to edges of collar and again 7 mm (1/4 in) from edges. Lay collar band pieces right sides together, catching collar in between. -Stitch along front and upper edges of collar band, beginning and ending in front, exactly at seam line on joining edge. Turn collar band right side out. Work from inside to stitch inside collar band piece to neck edge. Turn in outer collar band piece and baste over joining -seam. Top-stitch collar band close to all edges

Step 7 — Shoulder tabs

Fold shoulder tabs lengthwise, right side facing in. Stitch along lengthwise edges and across one end of each tab. Turn shoulder tabs right side out. Top-stitch tabs close to edges. Work a buttonhole in faced end of each tab. Lay tabs on shoulder seams and baste to armhole edges.

Step 8 — Sleeve tabs

— Sew sleeve tabs as for shoulder tabs. Stitch tabs in place on wrong fabric side of sleeves, along joining lines — tabs point up. Lay tabs down and press.

Step 9 — Stitch sleeve seams as flat-felled seams

Stitch seam. Press seam allowances to one side. Trim underneath layer of seam allowance to 5 mm (3/16 in) wide. Turn in upper seam allowance and baste. Work from right side to stitch 7 mm (1/4 in) from edge. Lay sleeve hem allowances to inside, turn half in and stitch.

Step 10 — Sleeve Caps

Set in sleeves, easing sleeve caps.

Step 11 — Buttonholes

Work buttonholes in right front band and right end of collar band. Lay right band on left band, matching centres. Baste bottom edges of bands together.

Step 12 — Stitch side seams of trousers

Stitch side seams of trousers, not stitching across pocket openings.

Step 13 — In-seam pockets

Work from the inside to pin pocket pieces right sides together with seam allowances of pocket opening edges and stitch in place, directly along marked seam lines. -Stitch pocket pieces close to -seam, above and below pocket openings. Press pocket pieces forward and -stitch together. Baste upper edges of pocket pieces in place.

Step 14 — Trouser legs

Stitch inside leg seams. Place one trouser leg inside the other, with right sides facing. Stitch front and back centre seam as continuous seam. Press seam allowances open from upper edges to beginnings of curve. Do not press seam allowances flat along curve.

Step 15 — Stitch upper part of garment to upper edge of trousers

Stitch upper part of garment to upper edge of trousers. Press seam allowances onto trousers. Topstitch trousers 4 cm (15/8 ins) from joining seam, from marked end of elastic, to form casing for elastic. Do not top-stitch between markings (ends of elastic).

Step 16 — Belt carriers

Fold fabric strip for belt carriers lengthwise, right side facing in. Stitch 2 cm (3/4 in) from fold edge. Turn strip right side out and topstitch close to edges. Cut strip into 4 pieces. Turn in ends of belt carriers. Finished length of belt carriers = 7.5 cm (3 ins). Pin belt carriers over elastic casing, in front and in back, spaced 8 cm (3 1/4 ins) from each side seam. Edgestitch ends of belt carriers in place.

Step 17 — Elastic

Pull 3.5 cm (1 1/2 in) wide elastic into casing. Stitch ends of elastic as -marked for a finished length of 57 â— 61 â— 65 â— 69 â— 73 cm (22 1/2 â— 24 â— 25 3/4 â— 27 1/4 â— 28 3/4 ins). Topstitch between ends of elastic casing, 4 cm (1 5/8 ins) wide.

Step 18 — Hem

Press hem allowances to inside on fold line. Topstitch 5 cm (2 ins) from lower edge of each trouser leg, on each side of marked ends of casing for elastic, but do not yet topstitch in between. Pull elastic into casing. Stitch across ends for a finished length of 14 cm (5 1/2 ins). Stitch remainder of hem allowances in place.

Step 19 — Roll up sleeves

Roll up sleeves and fasten with sleeve tabs

5/2010 Jumpsuit