

01/2012 Bolero

By: burda style magazine

<http://www.burdastyle.com/projects/012012-bolero>



Bolero burda style magazine patterns FAQ

Materials

Stretch satin

Step 1 — Preparation




Paper cut for ANSI A (German DIN A4) prints:

This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).

burda style magazine pattern do not have seam allowance included.

Seam and hem allowances to be added: Seams and edges 1.5 cm (5/8 in).

Step 2 — Cutting out

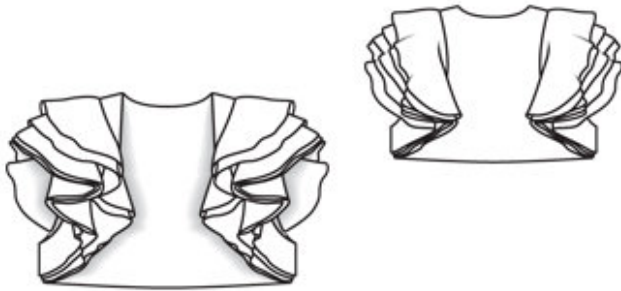

Stretch satin:

21 front and back, on a fold 1x

22 flounce I to V, each 2x

Note: Use the shiny side as the right side of the fabric. Use chalk to draw flounces I to V on wrong side of the fabric. Mark centres of flounces (fabric fold).

Cotton satin (lining): piece 21.

Step 3 — Lining

On lining piece, press side seam allowances to wrong side. Stitch lining piece right sides together with piece of main fabric, leaving side edges open. Trim seam allowances. Turn piece right side out. Press edges.

Step 4 — Fronts

Fold fronts onto back, right sides facing. Stitch side seams on main fabric, not catching lining. Press seam allowances open and slide allowances under lining. On lining, sew side seam edges together by hand. Topstitch close to all edges of bolero.

Step 5 — Flounces

Use vanishing chalk to mark a joining line for flounce II, 1.5 cm (5/8 in) from each armhole edge. Mark three more lines, spaced 1.5 cm (5/8 in) apart. Neaten outer flounce edges with a narrow, closely spaced overlock

stitch, thereby trimming away the seam allowances. On flounces I, press allowance on inside edge to right fabric side (clipping allowance several times). On flounces II to V, press allowances on inside edges to wrong fabric side. Pin flounces I right sides together with edges of armholes, matching centre of wide flounce half to shoulder seam line. Sew pressed-under inner edges in place, by hand, with small back stitches, 2 mm (a scant 1/8 in) from edge. Turn flounces into armholes. Sew flounces II to V each to joining lines, with wrong side facing right side.

BurdaStyle

01/2012 Bolero