

burda style magazine 03/2010 Jumpsuit

By: burda style magazine


<http://www.burdastyle.com/projects/burda-style-magazine-032010-j>

Jumpsuit. For more information on this and other burda style magazine patterns, please see this dedicated blog post.

Materials

Stretch Jersey

Step 1 — Preparation

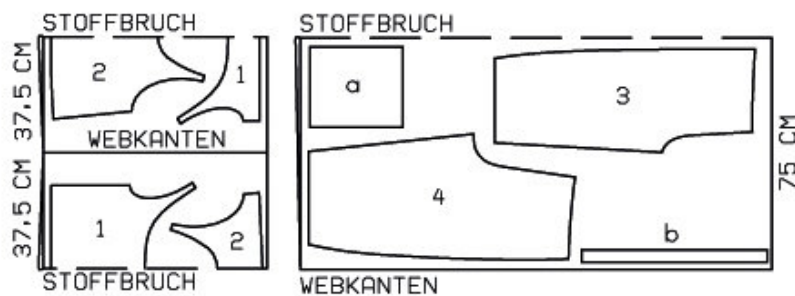

119 A,B 34-42


Trace the pattern pieces from the pattern sheet. Trace the facings from pieces 1 and 2 as separate pattern pieces.

The stitching line for the elastic casing on upper edge of piece 1 is marked for size 34. For sizes 36 — 42, mark the stitching line the same distance from upper edge, as far as marking.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), waist seam 2 cm (3/4 in).

Step 2 — Cutting Out

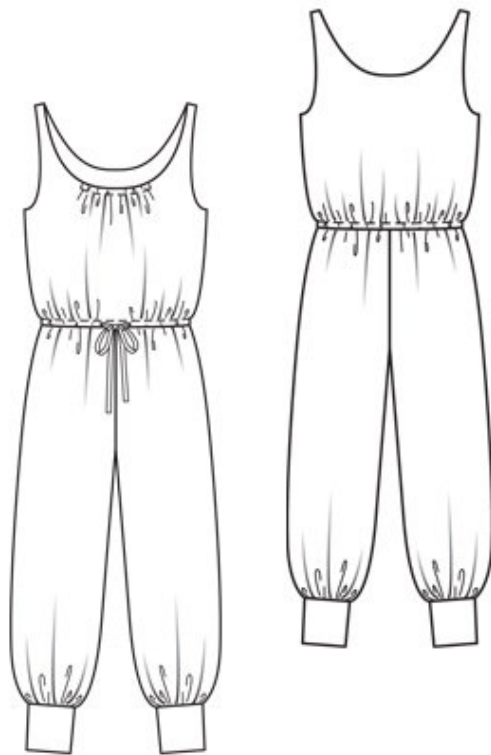

- 1 front, on a fold 1x
- 2 front facing, on a fold 1x
- 2 back, on a fold 1x
- 2 back facing, on a fold 1x
- 3 front trouser piece 2x
- 4 back trouser piece 2x

- a) 2 leg bands for trouser legs, 24 — 25 — 26 — 27 — 28 cm (9 1/2 — 10 — 10 1/4 — 10 3/4 — 11 1/8 ins) long, 30 cm (12 ins) wide, finished width 15 cm (6 ins),
- b) 2 tie bands, 60 cm (23 3/4 ins) long, 4 cm (1 5/8 ins) wide (incl. allowance).

Vilene/Pellon Bias Tape: Iron onto neck and armhole edges.

Step 3 — Shoulder Seams, Facings, Inserting Elastic

Press shoulder seam allowances of facing pieces to wrong side. Pin front facing to front piece and back facing to back piece, right sides together. Stitch along edges of armholes and neck. Trim seam allowances and clip curves. Turn facings to inside. Press edges. Stitch shoulder seams. Press seam allowances open and slip underneath facing edges. Sew shoulder edges of facing together by hand. Topstitch front neck edge between markings, as marked, to form elastic casing. Insert elastic and stitch across ends for a finished length of about 12 cm (4 3/4 ins).

Step 4 — Armholes and Side Seams

Lay facings at edges of armholes up again. Stitch side seams, including those on facings. Press seams open. Lay facings down again and sew to seams.

Step 5 — Drawstring Openings

Work drawstring openings (like buttonholes) in front, first ironing small pieces of interfacing to wrong side, as reinforcement.

Step 6 — Trouser Legs

Stitch side seams and inside leg seam on trousers. Pull one trouser leg into the other, right sides facing. Stitch front and back centre seam as continuous seam. Stitch upper part of garment to upper edge of trousers. Neaten seam allowances together, press up, and stitch as marked to form casing.

Step 7 — Drawstrings

Turn in one end of each drawstring band. Fold drawstrings lengthwise, right side facing in. Stitch 1 cm (3/8 in) from fold edge. Turn drawstrings right side out and press. Stitch ends closed. Cut a piece of elastic 50 — 54 — 58 — 62 — 66 cm (19 3/4 — 21 1/4 — 23 — 24 1/2 — 26 ins) long. Stitch drawstrings to ends of elastic and pull into casing.

Step 8 — Finishing Trouser Legs

Gather lower edges of trouser legs to 30 — 31 — 32 — 33 — 34 cm (12 — 12 1/4 — 12 1/4 — 12 3/4 — 13 — 13 1/2 ins). Stitch seams of leg bands. Fold leg bands in half. Stitch edges of leg bands together to lower edges of trouser legs, stretched to fit.

BurdaStyle

burda style magazine 03/2010 Jumpsuit