

05/2010 Bermuda Style Shorts

By: burda style magazine

<http://www.burdastyle.com/projects/052010-bermuda-style-shorts>




Bermuda Shorts with pocket details burda style magazine patterns FAQ

Materials

Poplin

Step 1 — Preparation

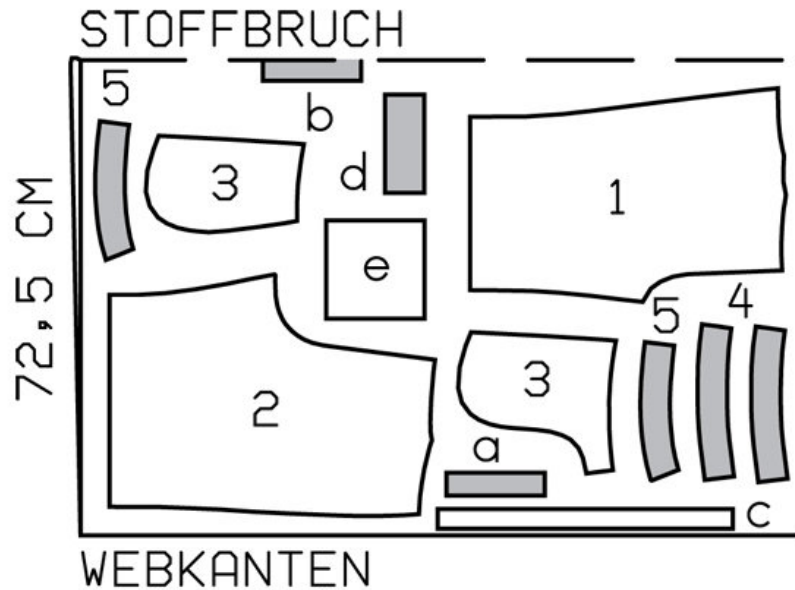

133 36-44


Trace the pattern pieces from the pattern sheet. Follow lines and details for style 133. Trace piece 3 again just to the stitching line (= small -pocket piece).

The pleat arrows on piece 1 are mark-ed for size 36. Mark the pleat arrows for the other sizes according to the size lines. The stitching lines at the zip fly opening are marked for size 36. For sizes 38 — 44, mark the stitching lines the same distance from centre front as for size 36.

Seam and hem allowances:

Seams and edges 1.5 cm (5/8 in), hem 4 cm (15/8 ins).

Step 2 — Cutting Out

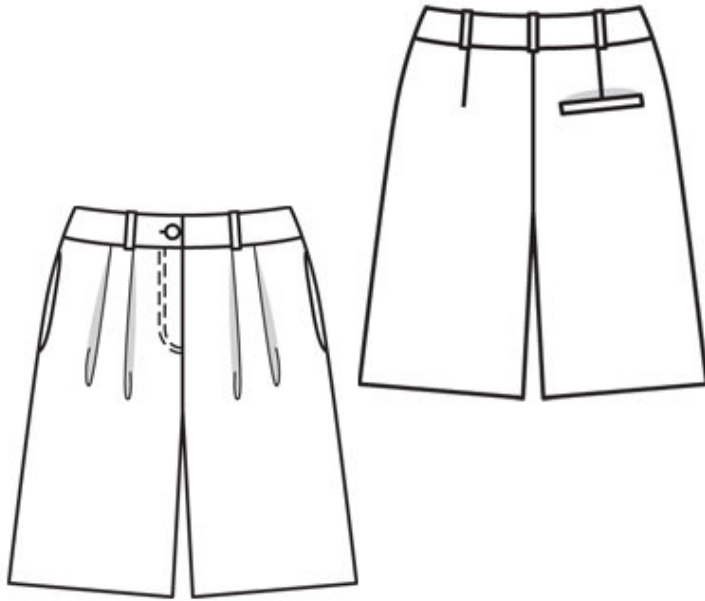

1 front trouser piece 2x

2 back trouser piece 2x

3 large pocket piece 2x

4— small pocket piece 2x

4 front waistband 4x

5 back waistband 4x

a) right facing piece, 15 cm (6 ins) long, 3.5 cm (1 1/2 ins) wide,

b) left underlap piece, 15 cm (6 ins) long, 7 cm (3 ins) wide, finished width 3.5 cm (1 1/2 ins),

c) strip for 5 belt carriers, 45 cm (18 ins) long, 3 cm (1 1/4 ins) wide (incl. allowance),

d) welt strip (back pocket), 15 cm (6 ins) long, 5 cm (2 ins) wide (incl. allowance),

e) 2 pocket pieces, 15 cm (6 ins) wide, 15 cm (6 ins) long (incl. allowance).

Interfacing: See pattern layout. Iron a strip of interfacing, about 4 cm (1 5/8 ins) wide, to wrong side of piece 2, over pocket marking.

Step 3 — Pleats

Fold pleats in front trouser pieces in arrow direction and baste.

Step 4 — Stretch seam edges

Lay back trouser pieces right sides facing. Stretch inside leg edges with a steam iron or press under a damp cloth until the edges match corresponding edge on front trouser piece.

Step 5 — Back darts

Stitch back darts and press toward centre.

Step 6 — Construct single welt pocket on right back trouser piece

Mark an abutting line for the welt, 1.5 cm (5/8 in) from welt joining line (finished width of welt). Fold welt strip lengthwise, right side facing out, and press. Baste doubled welt strip over welt joining line so that fold edge of welt meets abutting line and open lengthwise edges lie between pocket lines. Stitch welt in place along welt joining line. Stitch one pocket piece to pocket -piece joining line. Slash between lines of stitching and clip diagonally toward each last stitch. Do not cut into piping or pocket piece. Lay welt toward pocket opening and pull pocket piece to inside. Stitch other pocket piece to seam allowances of welt joining seam. Fold small triangles at pocket opening ends to -inside and stitch to welt and pocket pieces, from seam end to seam end. Trim pocket pieces even and stitch together.

Step 7 — Side Seams

Stitch side seams, not stitching across pocket openings. Press seam allowances open.

Step 8 — In-seam pockets

Pin pocket pieces right sides together with seam allowances of pocket opening edges — large pocket pieces in front and small pocket pieces in back. Stitch pocket pieces close to side seam and at -pocket opening, along seam line. Press pocket pieces forward and stitch together. Baste pocket pieces to wrong side of trouser fronts.

Step 9 — Inside leg seams

Stitch inside leg seams. Stitch centre front seam from slit mark to inside leg seam.

Step 10 — Zip opening

Stitch right facing -piece right sides together with right edge of opening. Turn facing to inside and press edge. Press allowance on left edge of opening (underlap) to inside, 5 mm (3/16 in) before centre front, and understitch zip close to teeth of zip. Pin opening closed matching centres. Stitch loose zip tape to right facing, not catching trouser piece. Baste facing in place. Topstitch opening from upper edge to 3 cm (1 1/4 ins) before the end, as marked. Fold underlap piece lengthwise. Stitch across bottom end. Turn right side out. Lay underlap under left edge of opening and pin to allowance of opening edge. Stitch allowance of opening edge to underlap, close to zip joining seam. Close zip. Topstitch to end of opening, catching underlap.

Step 11 — Centre Back Seam

Stitch centre back seam. Press seam open from upper edge to beginning of curve. Do not press seam allowances flat along curve.

Step 12 — Belt carriers

Neaten lengthwise edges of strip for belt carriers and press to inside, 8 mm (1/4 in) wide. Topstitch close to edges. Cut strip into 5 equal pieces. Baste belt carriers to upper edge of trousers, placing one over each pleat in front, and one next to each dart and over centre back seam in back.

Step 13 — Waistband

Stitch side seams and centre back seam of waistband pieces. Stitch outer waistband to upper edge of trousers. Leave right end of waistband extending from centre front and stitch left end of waistband to underlap. Press seam allowances of joining seam onto waistband. Press allowance on lower edge of inside waistband to inside. Pin inside waistband right sides together with attached outer waistband. Stitch across front ends of waistband (on the right along centre front) and along upper edge of waistband. Trim seam allowances. Turn waistband right side out. Baste inside edge of waistband in place. Top-stitch waistband close to edge. Lay belt carriers up, turn ends in and stitch to upper edge of waistband. Work a buttonhole in right front end of waistband.

Step 14 — Hem

Press hem allowances to inside and sew in place by hand.

Step 15 — Hem

Press hem allowances to inside and sew in place by hand.

BurdaStyle

05/2010 Bermuda Style Shorts