

Long Cardigan 03/2012

By: burda style magazine

<http://www.burdastyle.com/projects/long-cardigan-032012>



Long cardigan sewing pattern. This cardigan is great for summer. Or make it in a warm wool for winter!
burda style magazine patterns FAQ

Materials

Batiste, width: 135 cm (53 ins) length: Size 34 – 36: 1.30 (1 1/2 yds) Size 38 – 42: 1.40 m (1 5/8 yds) Elastic, 2 cm (3/4 in) wide: 0.65 0.70 0.75 0.80 0.85 m (26 28 30 32 34 ins).

Step 1 — Preparations



Paper cut for ANSI A (German DIN A4) prints:

This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).


Trace the pattern pieces from the pattern sheet following the lines and markings for the correct size and the correct style (122). (This pattern also includes pattern pieces, lines and markings for style 121A and B.)

burda style magazine pattern do not have seam allowance included.


Seam and hem allowances to be added: Seams and edges 1.5 cm (5/8 in), sleeve hems 2 cm (3/4 in), front edge and front neck edge 2 cm (3/4 in), no allowance on lower edges of lower front and back pieces.

Step 2 — Cutting out

Pattern Pieces 1 to 5

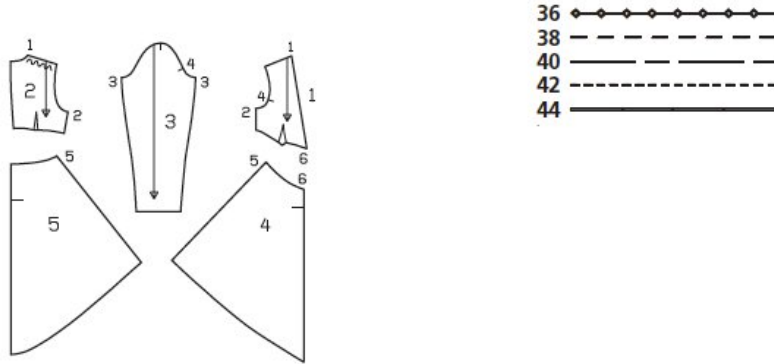

Fabric width 150 cm

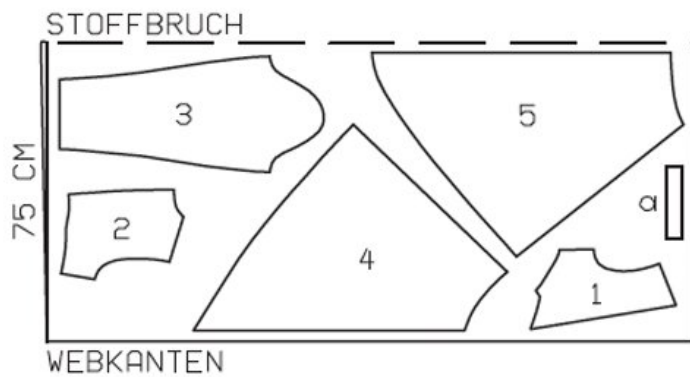

Webkante = Selvage
Stoffbruch = Fabric fold

- 1 upper front 2x
- 2 upper back 2x
- 3 sleeve 2x
- 4 lower front 2x
- 5 lower back 2x

a) facing strip for back neck edge, 18 19 19 20 20 cm (7 7 1/2 7 1/2 8 8 ins) long, 4 cm (1 5/8 ins) wide (incl. allowances).

Vilene Bias Tape/stay tape: Iron to armhole edges and to front shoulder seam edges. Also iron to angled front neck edges on upper front pieces and to lower edges of front and back pieces.

Step 3 — Sewing



Note: Stitch seams on stretch fabrics with a special stretch stitch or at a narrow zigzag setting.

Stitch centre seams on upper and lower back. Trim seam allowances to 7 mm (1/4 in) wide, neaten together, and press to one side. Stitch front and back darts and press toward centre. Stitch side seams on upper and lower pieces. Stitch upper front and back to lower front and back. Press seam allowances up.

Fold facing strip for back neck edge lengthwise, right side facing out, and press. Pin folded facing strip to back neck edge so that fold edge of strip lies on garment piece, 1 cm (3/8 in) past seam line. Stitch along marked neck edge. Turn the facing strip to the inside and press edge. Topstitch 7 mm (1/4 in) from neck edge.

Stitch the shoulder seams, leaving allowances at front neck edge extending. Press the shoulder seam allowances forward. Turn allowances on front neck edges and on front edges to inside, turn raw edges under to a width of 1 cm (3/8 in), and baste. Topstitch 7 mm (1/4 in) from front and neck edges.

Stitch sleeve seams. Press sleeve hem allowances to inside, turn raw edges under, and stitch.

Set in sleeves.

For tie bands, fold bias tape in half lengthwise and press, wrong side facing in. Unfold bias tape again. Now turn each long edge in to the pressed fold and press again. Stitch turned-in edges together. Cut tape into 2

equal pieces. Stitch tie bands to inside of front edge, at horizontal seam.

BurdaStyle

Long Cardigan 03/2012