

Wrap Top 03/2012

By: burda style magazine

<http://www.burdastyle.com/projects/wrap-top-032012>



Wrap top sewing pattern. Jersey knit fabric. burda style magazine patterns FAQ

Materials

A: Crepe jersey, fabric width: 150 cm (59 ins), length: 1.00 m (1 1/8 yds) for all sizes. Vilene Bias Tape/stay tape. A twin sewing machine needle. B: Stretch jersey, 150 cm (59 ins) wide: 1.25, 1.25, 1.30, 1.30, 1.30 m (1 1/2 yds). Vilene Bias Tape/stay tape. A twin sewing machine needle.

Step 1 — Preparations



Paper cut for ANSI A (German DIN A4) prints:

This pattern is printed on 8.5 × 11 sheets of plain paper. Do not scale or center pages before printing. Wait until all sheets are printed out before beginning to tape them together. **Do not cut out pattern pieces yet**— Arrange the sheets on a large, hard, flat surface so that they fit together, matching up like numbers and letters (i.e. 6A to 6A). To tape pattern together, fold under the margin of one piece (6A) and tape right against the line of it's matching number/letter (6A).



Trace the pattern pieces from the pattern sheet. Follow lines and details for style 121 A or 121B depending on the style you are making. 121 A is short sleeved and 121B long sleeved.

burda style magazine pattern do not have seam allowance included.

Seam and hem allowances to be added: Seams and edges 1.5 cm (5/8 in), sleeve hems 2 cm (3/4 in).


Step 2 — Cutting out

Style A:

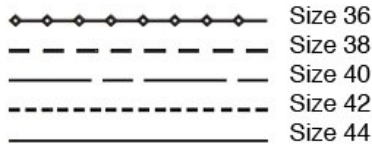



Webkante = Selvage
Stoffbruch = Fabric fold

Fabric width for both styles, 150 cm

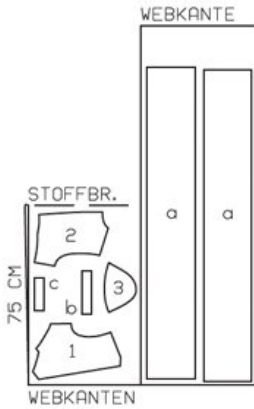

Style B:

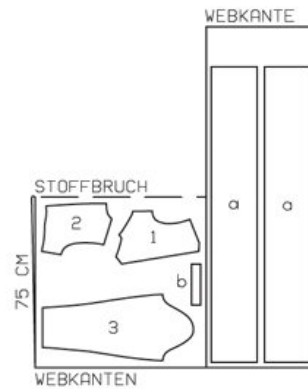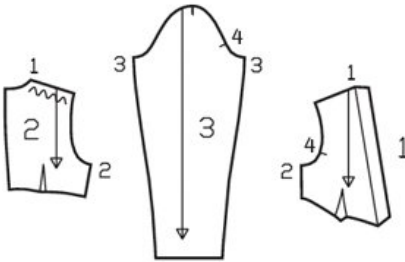

Style A:

- 1 front 2x
- 2 back 2x
- 3 sleeve 2x

Also draft and cut the following pieces, not included in the pattern sheet:

- a) waistband with integrated tie band, cut 2, each 130, 134, 138, 142 or 146 cm (51 1/4, 52 3/4, 54 1/2, 56, 57 1/2 ins) long, 20 cm (8 ins) wide,
- b) facing strip for back neck edge, 18, 19, 19, 20, 20 cm (7, 7 1/2, 7 1/2, 8, 8 ins) long, 4 cm (1 5/8 ins) wide (incl. allowances),
- c) 2 facing strips for armholes 14, 14, 14, 14, 15 cm (5 1/2, 5 1/2, 5 1/2, 5 1/2, 6 ins) long, 4 cm (1 5/8 ins) wide (incl. allowances).

Vilene Bias Tape/stay tape: Iron to fronts along facing fold line, to front shoulder edges, back neck edges, and armhole edges.

Style B:

- 1 front 2x
- 2 back 2x


3 sleeve 2x

Also draft and cut the following pieces, not included in the pattern sheet:

- a) waistband with integrated tie band, cut 2, each 130,134, 138, 142 or 146 cm (51 1/4, 52 3/4, 54 1/2, 56, 57 1/2 ins) long, 20 cm (8 ins) wide,
- b) facing strip for back neck edge, 18, 19, 19, 20, 20 cm (7, 7 1/2, 7 1/2, 8, 8 ins) long, 4 cm (1 5/8 ins) wide (incl. allowances).

Vilene Bias Tape/stay tape: Iron to fronts along facing fold line, to front shoulder edges, back neck edges, and armhole edges.

Step 3 — Sewing

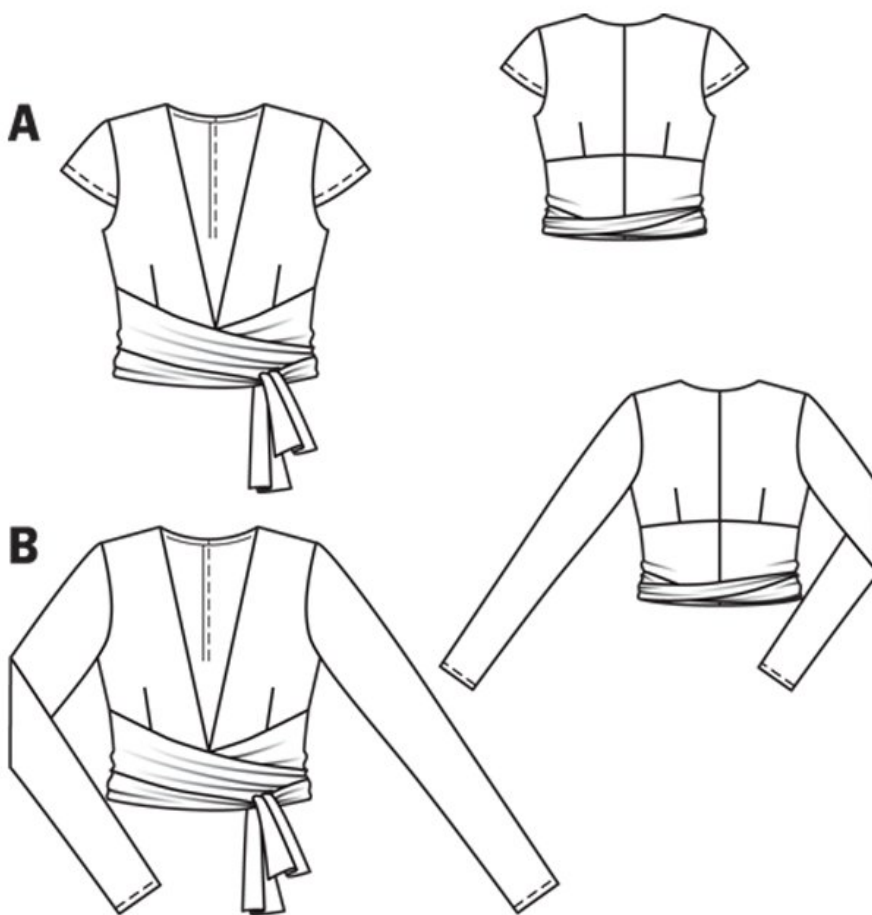

Style A:

Note: Stitch seams on stretch fabrics with a special stretch stitch or at a narrow zigzag setting. Stitch hems with a twin machine needle to keep them elastic.

Stitch centre back seam. Neaten seam allowances together and press to one side. Stitch front and back darts. Press darts toward centre.

Neck edge and shoulder seams: Fold facing strip for back neck edge lengthwise, with right side facing out, and press. Pin folded facing strip to back neck edge so that fold edge of lies on garment piece, 1 cm (3/8 in) past seam line. Stitch along marked neck edge. Turn facing strip to inside. Topstitch 5 mm (3/16 in) from neck edge. Stitch shoulder seams from seam number 1, leaving front facings extending. Press seam allowances forward. On front neck edges, turn self- facings to inside and press. Turn upper ends of facings under at shoulder seams and sew in place. Baste facings at lower front edge.

Stitch side seams. Press seam allowances onto back.

Press sleeve hem allowances to inside. Work from outer side and use twin needle to stitch hems 1.5 cm (5/8 in) from lower edge. Stitch sleeves to armhole edges, above markings. Fold facing strips for armholes in half lengthwise, right side facing out, and press. Pin folded facing strips to armhole edges, below sleeves, so that fold edges of strips lie on garment piece, 1 cm (3/8 in) past seam line, and ends of strips lie over lower sleeve edges. Stitch along marked armhole edges. Trim seam allowances. Turn facing strips to inside and press edges. Topstitch 5 mm (1/8 in) from armhole edges, below sleeves, stitch ing horizontally to lower sleeve edges.

Waistband and tie bands: Stitch centre back seam of waistband. Stitch waistband to lower edge of fronts and back, leaving tie bands extending. Press seam allowances of waistband joining seam onto waist band. Press allowances on tie band edges and on lower waistband edge to inside, turn raw edges under, and stitch.

Style B:

Note on stretch fabrics, see 121 A.

Stitch centre back seam. Neaten seam allowances together and press to one side. Stitch front and back darts. Press darts toward centre.

Neck edge and shoulder seams, see style 121 A.

Stitch side seams. Press seam allowances toward back.

Stitch sleeve seams. Press sleeve hem allowances to inside. Work from outer side and use twin needle to stitch hems 1.5 cm (5/8 in) from lower edge.

Set in sleeves. Turn the garment inside out and set in sleeves in each armhole, right sides facing each other, easing the sleeve caps. Pin the sleeve to the armhole and stitch around the armhole opening. Press the seam allowance out in to the sleeve.

Hem band and tie bands, see style 121 A.

BurdaStyle

Wrap Top 03/2012